

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365762

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365762
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3324.0 lumens
Efficiency: N/A
Efficacy: 57.2 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365762

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82

Luminous Intensity Polar Plot

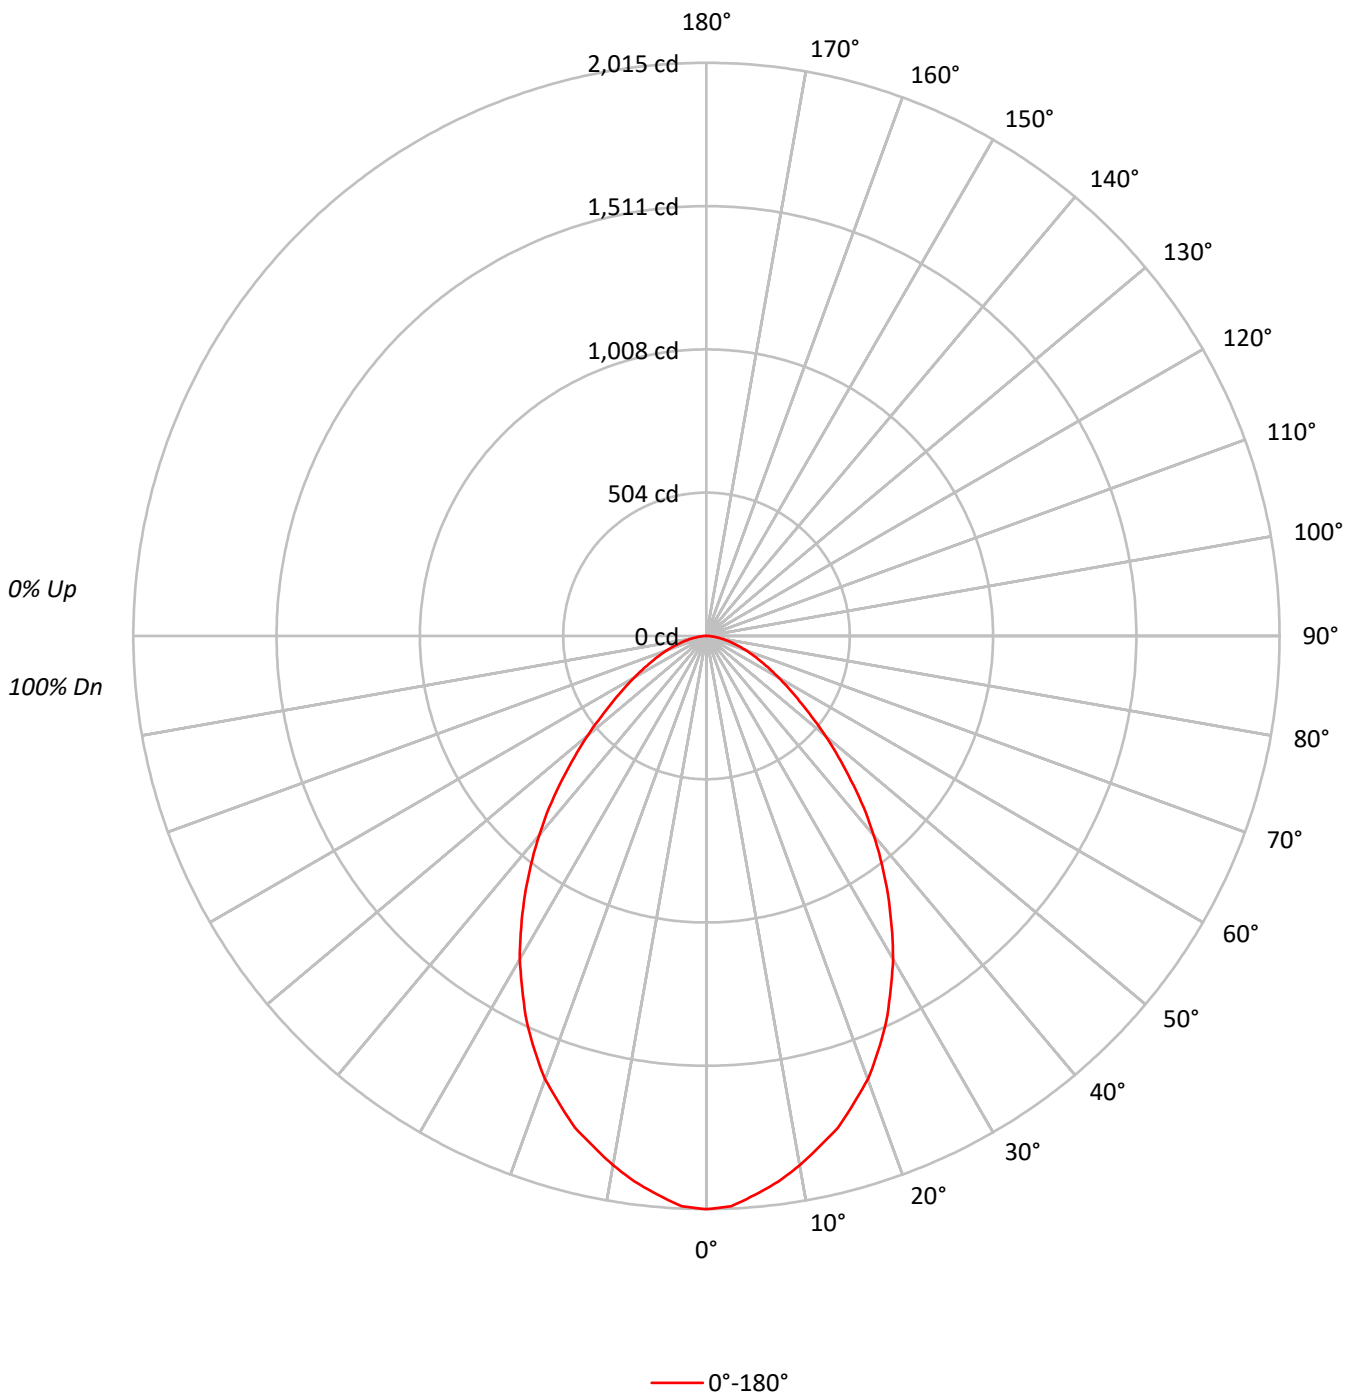



TEST NUMBER: P365762

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72	79	75	71	77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64	72	67	63	70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57	66	61	56	64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51	61	55	50	59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46	55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38	48	42	38	47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35	45	39	35	44	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	144292
5°	141731
10°	137379
15°	132577
20°	126388
25°	118182
30°	108516
35°	97261
40°	85515
45°	72816
50°	60820
55°	49896
60°	41901
65°	35613
70°	31068
75°	26226
80°	21235
85°	16924



TEST NUMBER: P365762

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.7	5.6
10°-20°	501.5	15.1
20°-30°	685.0	20.6
30°-40°	694.3	20.9
40°-50°	556.8	16.8
50°-60°	362.7	10.9
60°-70°	211.8	6.4
70°-80°	101.8	3.1
80°-90°	24.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1372.2	41.3
0°-40°	2066.5	62.2
0°-60°	2986.0	89.8
0°-90°	3324.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3324.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2015	
5°	1972	186
15°	1788	501
25°	1496	685
35°	1113	694
45°	719	557
55°	400	363
65°	210	212
75°	95	102
85°	21	24
90°	0	



TEST NUMBER: P365762

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-MW-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	2015.2
2.5°	2006.9
5°	1971.9
7.5°	1934.8
10°	1889.5
12.5°	1838.0
15°	1788.5
17.5°	1722.6
20°	1658.7
22.5°	1578.3
25°	1495.9
27.5°	1401.1
30°	1312.5
32.5°	1211.6
35°	1112.7
37.5°	1013.8
40°	914.9
42.5°	818.0
45°	719.1
47.5°	628.5
50°	546.0
52.5°	465.7
55°	399.7
57.5°	342.0
60°	292.6
62.5°	249.3
65°	210.2
67.5°	177.2
70°	148.4
72.5°	119.5
75°	94.8
77.5°	72.1
80°	51.5
82.5°	35.0
85°	20.6
87.5°	8.2
90°	0.0

(END OF REPORT)