

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366482

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366482
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4423.0 lumens
Efficiency: N/A
Efficacy: 76.1 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366482

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

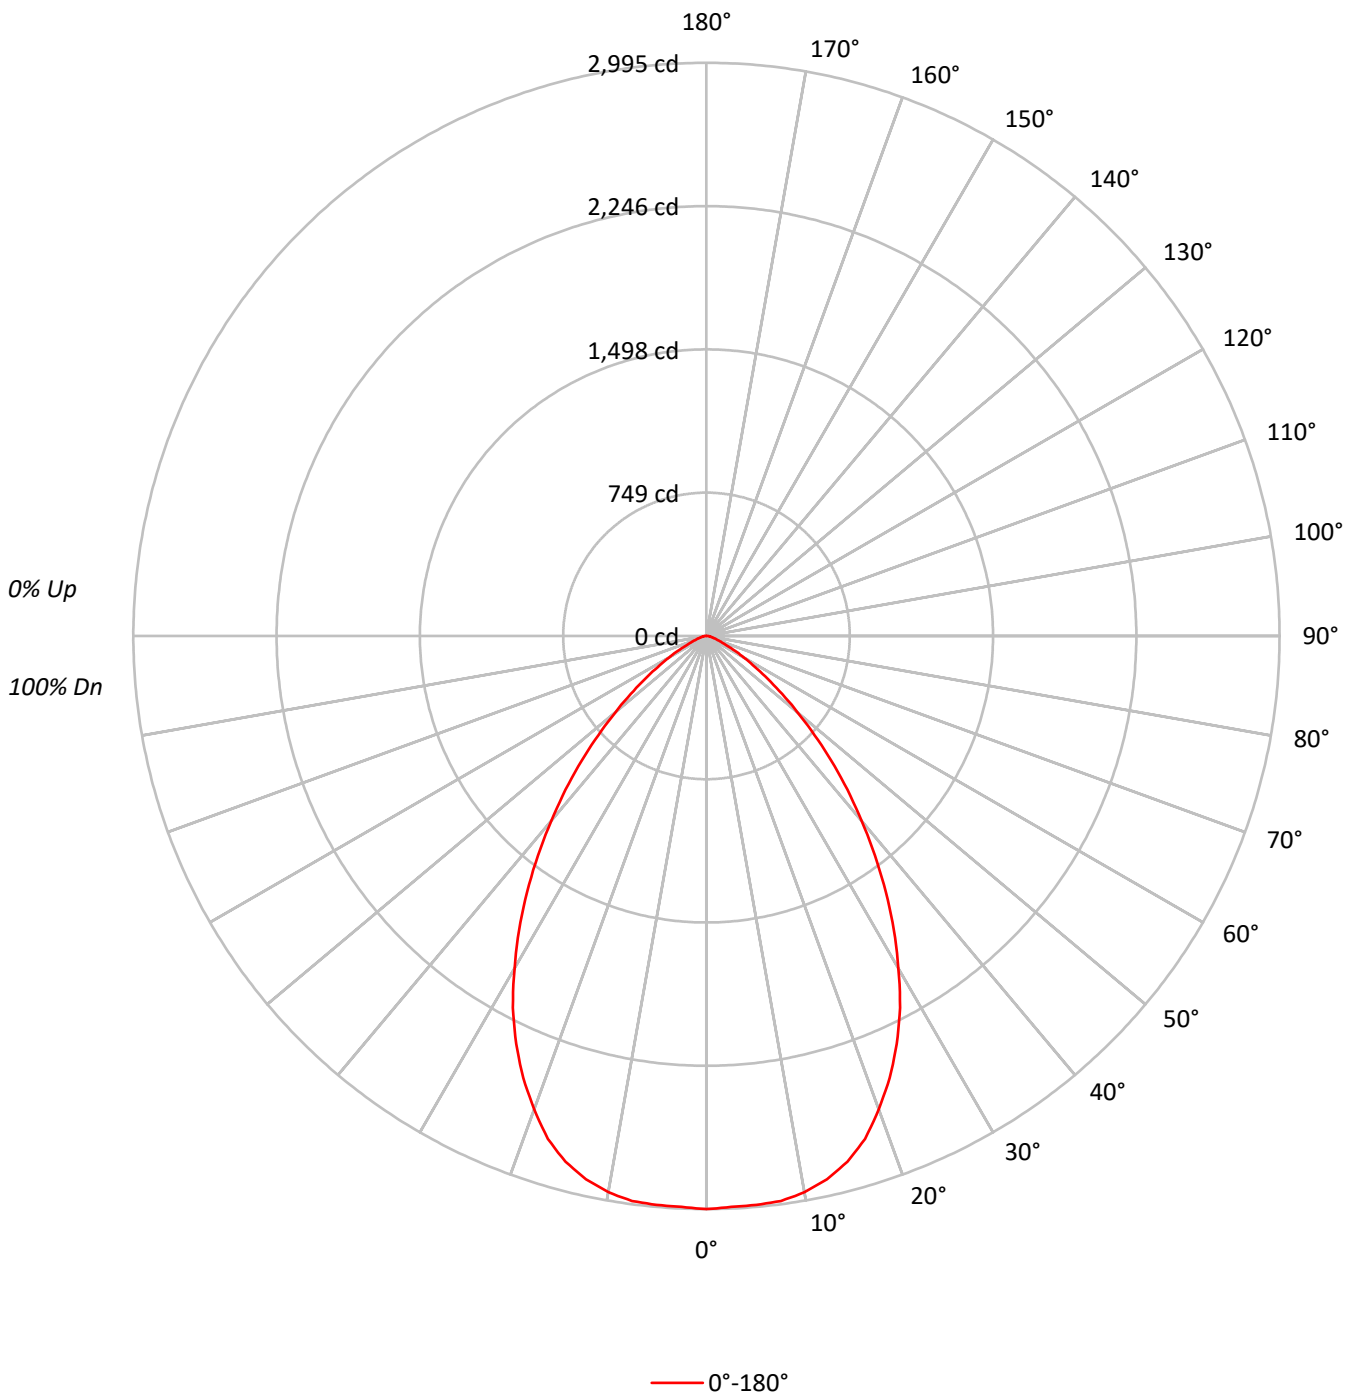



TEST NUMBER: P366482

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	214426
5°	214505
10°	214593
15°	210849
20°	200566
25°	185825
30°	165862
35°	142766
40°	117818
45°	93230
50°	69286
55°	48848
60°	32450
65°	19890
70°	12938
75°	9683
80°	8494
85°	10187



TEST NUMBER: P366482

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.0	6.4
10°-20°	796.3	18.0
20°-30°	1075.0	24.3
30°-40°	1017.2	23.0
40°-50°	713.0	16.1
50°-60°	358.8	8.1
60°-70°	126.7	2.9
70°-80°	39.6	0.9
80°-90°	12.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2155.4	48.7
0°-40°	3172.6	71.7
0°-60°	4244.3	96.0
0°-90°	4423.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4423.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2995	
5°	2984	284
15°	2844	796
25°	2352	1075
35°	1633	1017
45°	921	713
55°	391	359
65°	117	127
75°	35	40
85°	12	12
90°	0	



TEST NUMBER: P366482

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	2994.7
2.5°	2986.5
5°	2984.4
7.5°	2978.2
10°	2951.5
12.5°	2908.2
15°	2844.4
17.5°	2755.8
20°	2632.2
22.5°	2500.4
25°	2352.1
27.5°	2191.5
30°	2006.1
32.5°	1822.8
35°	1633.3
37.5°	1445.9
40°	1260.5
42.5°	1089.6
45°	920.7
47.5°	766.2
50°	622.0
52.5°	498.4
55°	391.3
57.5°	300.7
60°	226.6
62.5°	166.8
65°	117.4
67.5°	86.5
70°	61.8
72.5°	47.4
75°	35.0
77.5°	26.8
80°	20.6
82.5°	16.5
85°	12.4
87.5°	6.2
90°	0.0

(END OF REPORT)