

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366483

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366483
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4586.0 lumens
Efficiency: N/A
Efficacy: 78.9 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366483

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

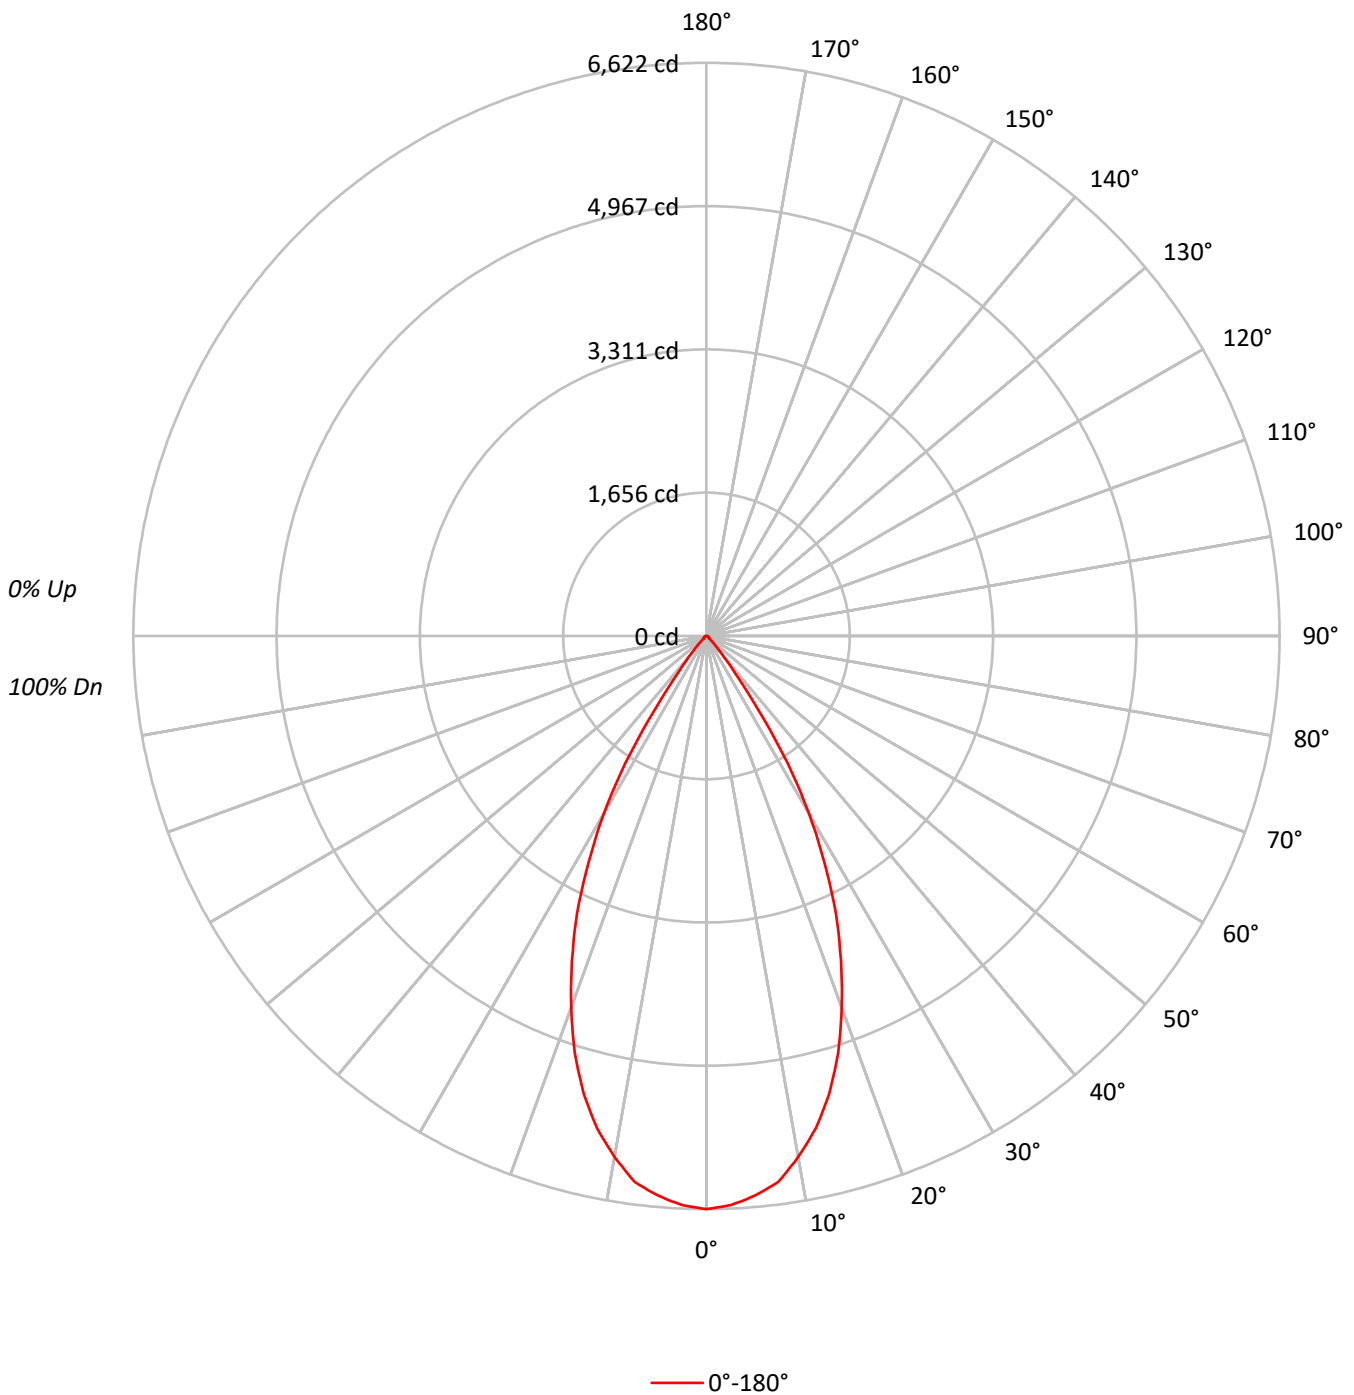



TEST NUMBER: P366483

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	474140
5°	466335
10°	444345
15°	406034
20°	348198
25°	279389
30°	195882
35°	90504
40°	29050
45°	9377
50°	4355
55°	3857
60°	3838
65°	3490
70°	3454
75°	3984
80°	5113
85°	8462



TEST NUMBER: P366483

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	608.5	13.3
10°-20°	1515.7	33.1
20°-30°	1591.8	34.7
30°-40°	706.4	15.4
40°-50°	91.2	2.0
50°-60°	28.5	0.6
60°-70°	20.1	0.4
70°-80°	14.7	0.3
80°-90°	9.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3716.1	81.0
0°-40°	4422.5	96.4
0°-60°	4542.2	99.0
0°-90°	4586.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4586.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6622	
5°	6488	608
15°	5478	1516
25°	3536	1592
35°	1035	706
45°	93	91
55°	31	29
65°	21	20
75°	14	15
85°	10	9
90°	0	



TEST NUMBER: P366483

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

0°	
0°	6621.9
2.5°	6580.8
5°	6488.1
7.5°	6362.6
10°	6111.5
12.5°	5829.5
15°	5477.5
17.5°	5055.5
20°	4569.7
22.5°	4059.2
25°	3536.4
27.5°	2949.7
30°	2369.2
32.5°	1741.4
35°	1035.4
37.5°	551.7
40°	310.8
42.5°	170.8
45°	92.6
47.5°	47.3
50°	39.1
52.5°	35.0
55°	30.9
57.5°	28.8
60°	26.8
62.5°	22.6
65°	20.6
67.5°	16.5
70°	16.5
72.5°	14.4
75°	14.4
77.5°	12.4
80°	12.4
82.5°	10.3
85°	10.3
87.5°	6.2
90°	0.0

(END OF REPORT)