

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366486

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366486  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4491.0 lumens  
Efficiency: N/A  
Efficacy: 77.3 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366486

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87

### Luminous Intensity Polar Plot

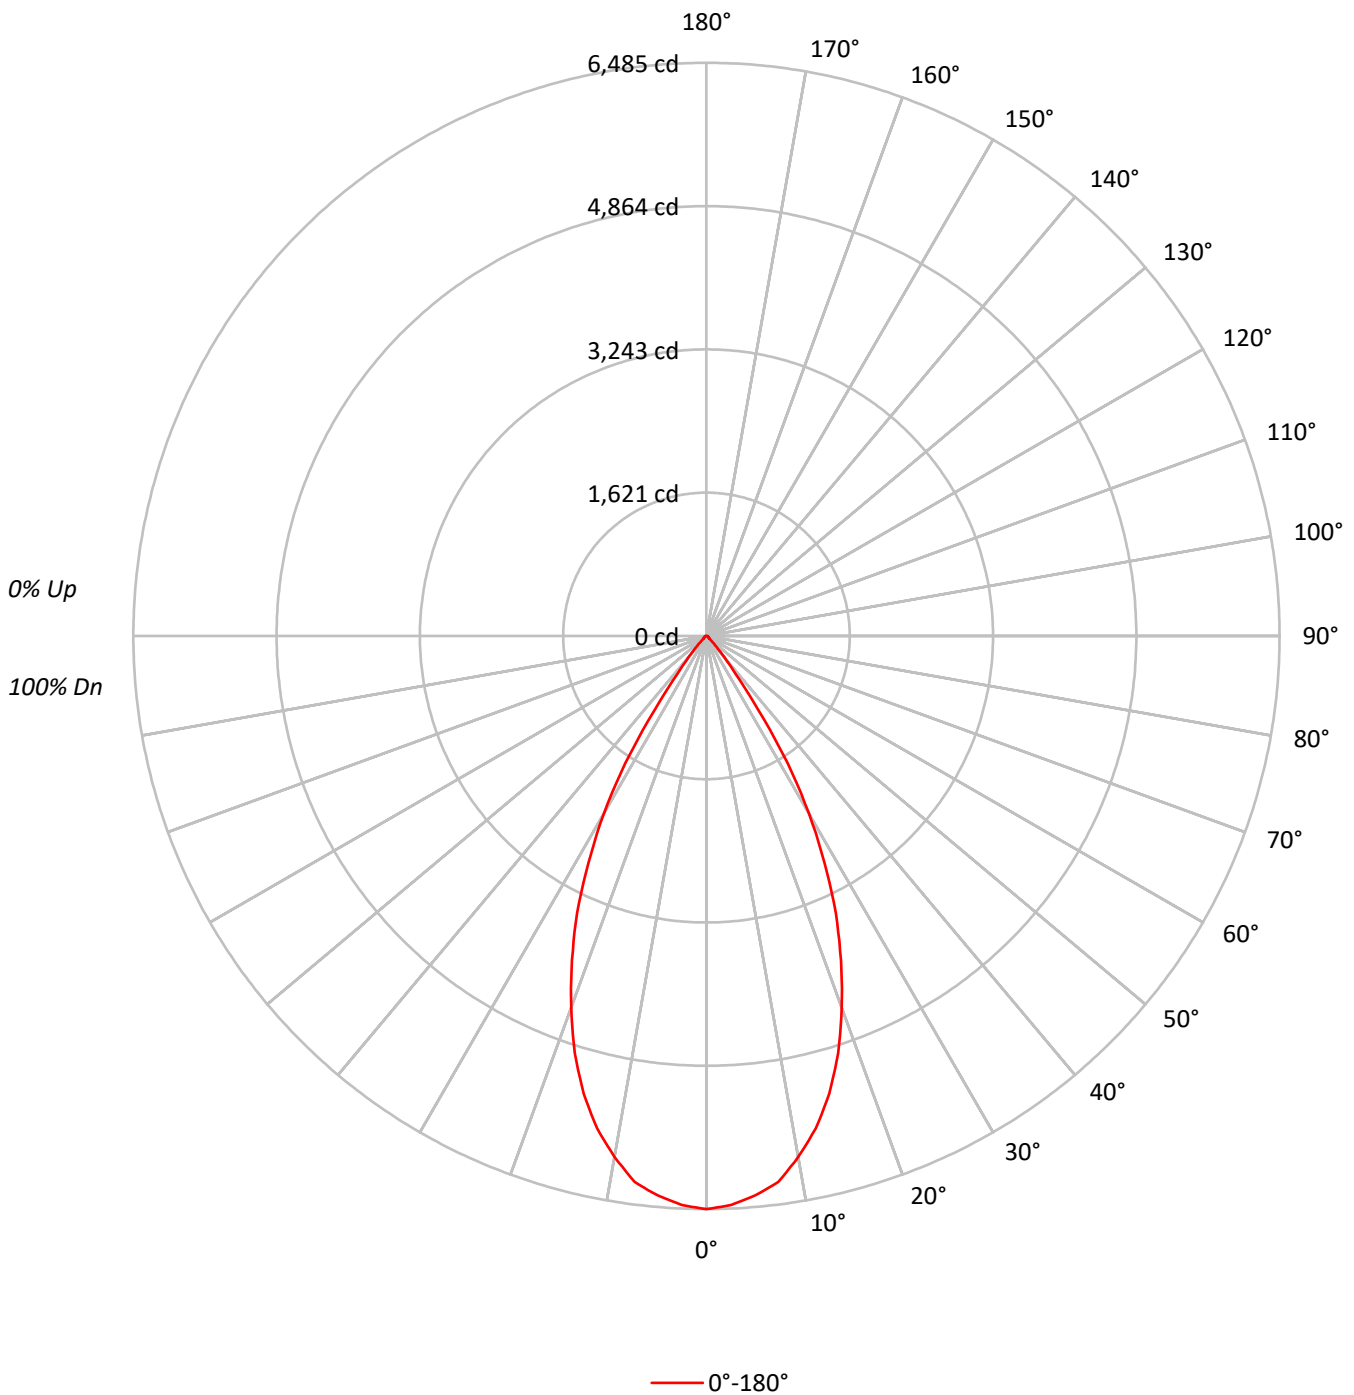



TEST NUMBER: P366486

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	464324
5°	456674
10°	435141
15°	397621
20°	340982
25°	273598
30°	191831
35°	88625
40°	28452
45°	9184
50°	4266
55°	3770
60°	3752
65°	3422
70°	3371
75°	3901
80°	4989
85°	8298



TEST NUMBER: P366486

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	595.9	13.3
10°-20°	1484.3	33.1
20°-30°	1558.9	34.7
30°-40°	691.7	15.4
40°-50°	89.4	2.0
50°-60°	27.9	0.6
60°-70°	19.7	0.4
70°-80°	14.4	0.3
80°-90°	8.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3639.1	81.0
0°-40°	4330.8	96.4
0°-60°	4448.1	99.0
0°-90°	4491.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4491.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6485	
5°	6354	596
15°	5364	1484
25°	3463	1559
35°	1014	692
45°	91	89
55°	30	28
65°	20	20
75°	14	14
85°	10	9
90°	0	



TEST NUMBER: P366486

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR87

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6484.8
2.5°	6444.5
5°	6353.7
7.5°	6230.8
10°	5984.9
12.5°	5708.7
15°	5364.0
17.5°	4950.8
20°	4475.0
22.5°	3975.1
25°	3463.1
27.5°	2888.6
30°	2320.2
32.5°	1705.4
35°	1013.9
37.5°	540.2
40°	304.4
42.5°	167.3
45°	90.7
47.5°	46.4
50°	38.3
52.5°	34.3
55°	30.2
57.5°	28.2
60°	26.2
62.5°	22.2
65°	20.2
67.5°	16.1
70°	16.1
72.5°	14.1
75°	14.1
77.5°	12.1
80°	12.1
82.5°	10.1
85°	10.1
87.5°	6.0
90°	0.0

(END OF REPORT)