

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365066

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365066
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5001.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365066

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV

Luminous Intensity Polar Plot

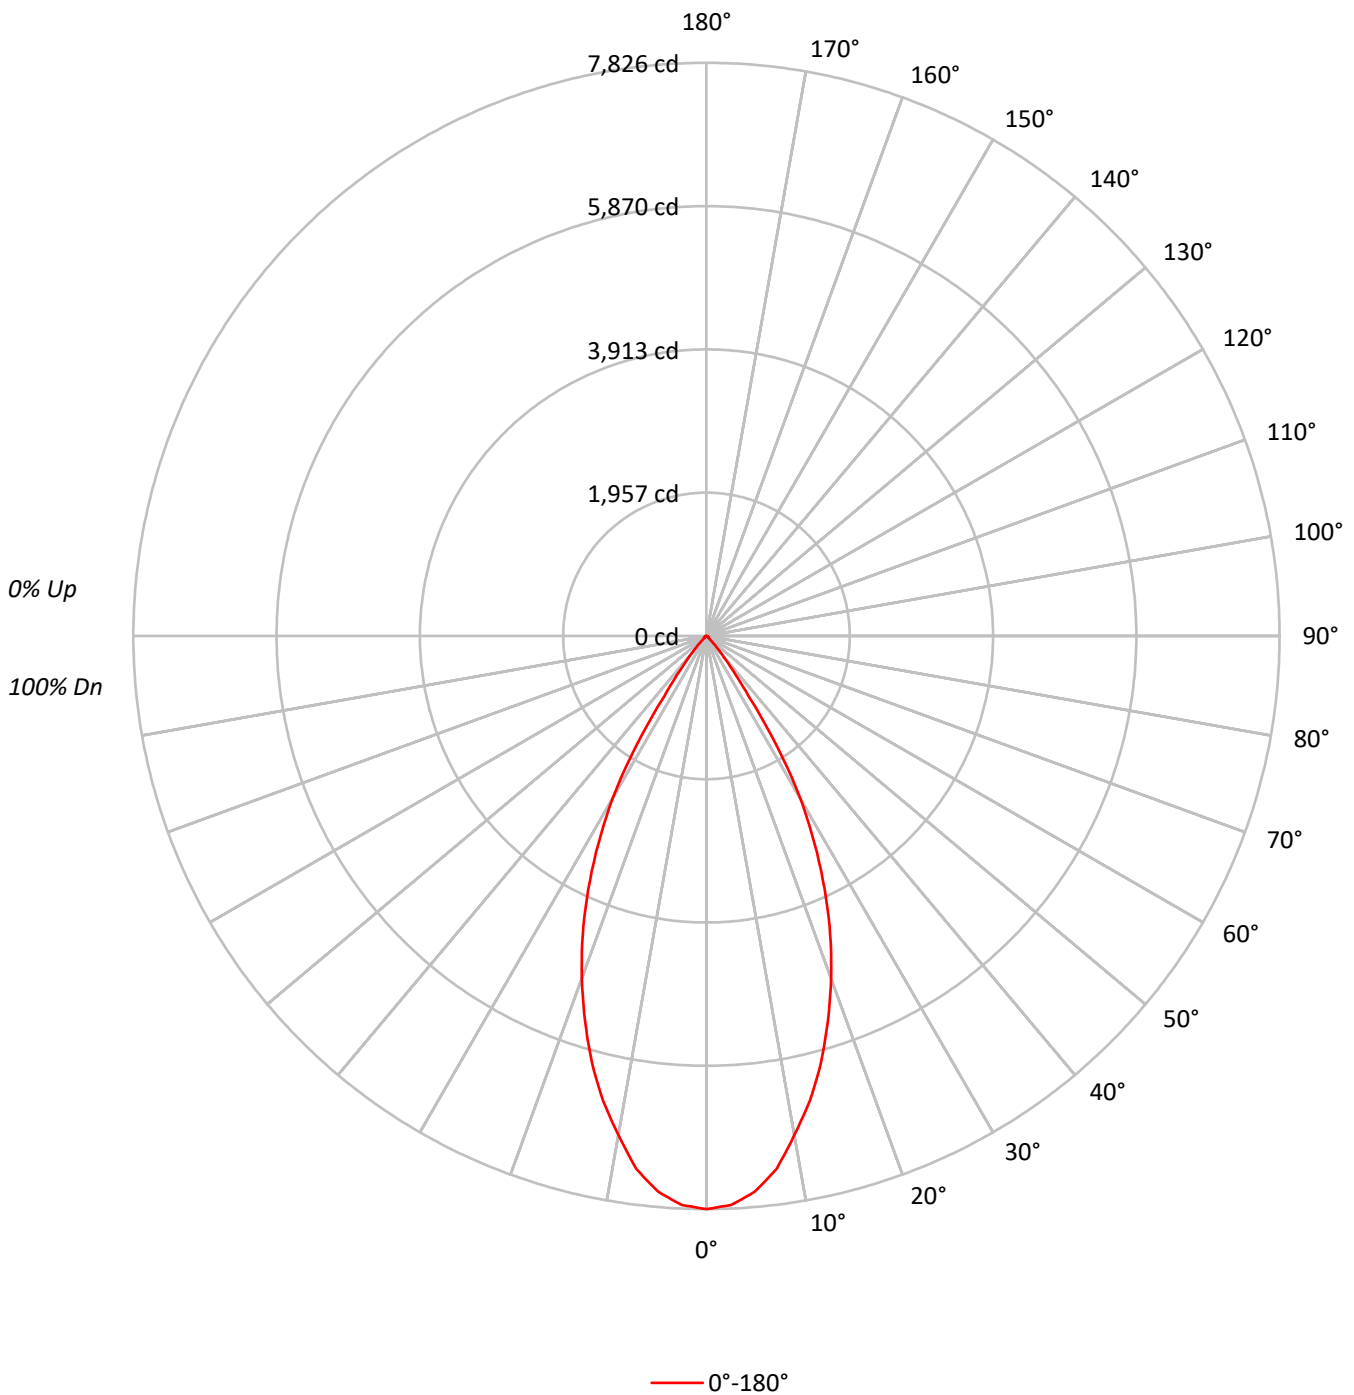



TEST NUMBER: P365066

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	560370
5°	547352
10°	503078
15°	447724
20°	379233
25°	301566
30°	212021
35°	88485
40°	30555
45°	7898
50°	3999
55°	3683
60°	3623
65°	3575
70°	3538
75°	4675
80°	5237
85°	8626



TEST NUMBER: P365066

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	705.0	14.1
10°-20°	1673.1	33.5
20°-30°	1726.4	34.5
30°-40°	734.3	14.7
40°-50°	88.1	1.8
50°-60°	26.6	0.5
60°-70°	20.9	0.4
70°-80°	16.8	0.3
80°-90°	9.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4104.5	82.1
0°-40°	4838.9	96.8
0°-60°	4953.6	99.1
0°-90°	5001.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5001.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7826	
5°	7615	705
15°	6040	1673
25°	3817	1726
35°	1012	734
45°	78	88
55°	30	27
65°	21	21
75°	17	17
85°	10	10
90°	0	



TEST NUMBER: P365066

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	7826.2
2.5°	7775.6
5°	7615.3
7.5°	7336.9
10°	6919.3
12.5°	6508.1
15°	6039.9
17.5°	5512.7
20°	4977.0
22.5°	4418.2
25°	3817.1
27.5°	3197.1
30°	2564.4
32.5°	1817.9
35°	1012.3
37.5°	582.1
40°	326.9
42.5°	168.7
45°	78.0
47.5°	42.2
50°	35.9
52.5°	31.6
55°	29.5
57.5°	27.4
60°	25.3
62.5°	23.2
65°	21.1
67.5°	19.0
70°	16.9
72.5°	16.9
75°	16.9
77.5°	14.8
80°	12.7
82.5°	12.7
85°	10.5
87.5°	6.3
90°	0.0

(END OF REPORT)