

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365773

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-38)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4777.0 lumens
Efficiency: N/A
Efficacy: 82.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365773

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86

Luminous Intensity Polar Plot

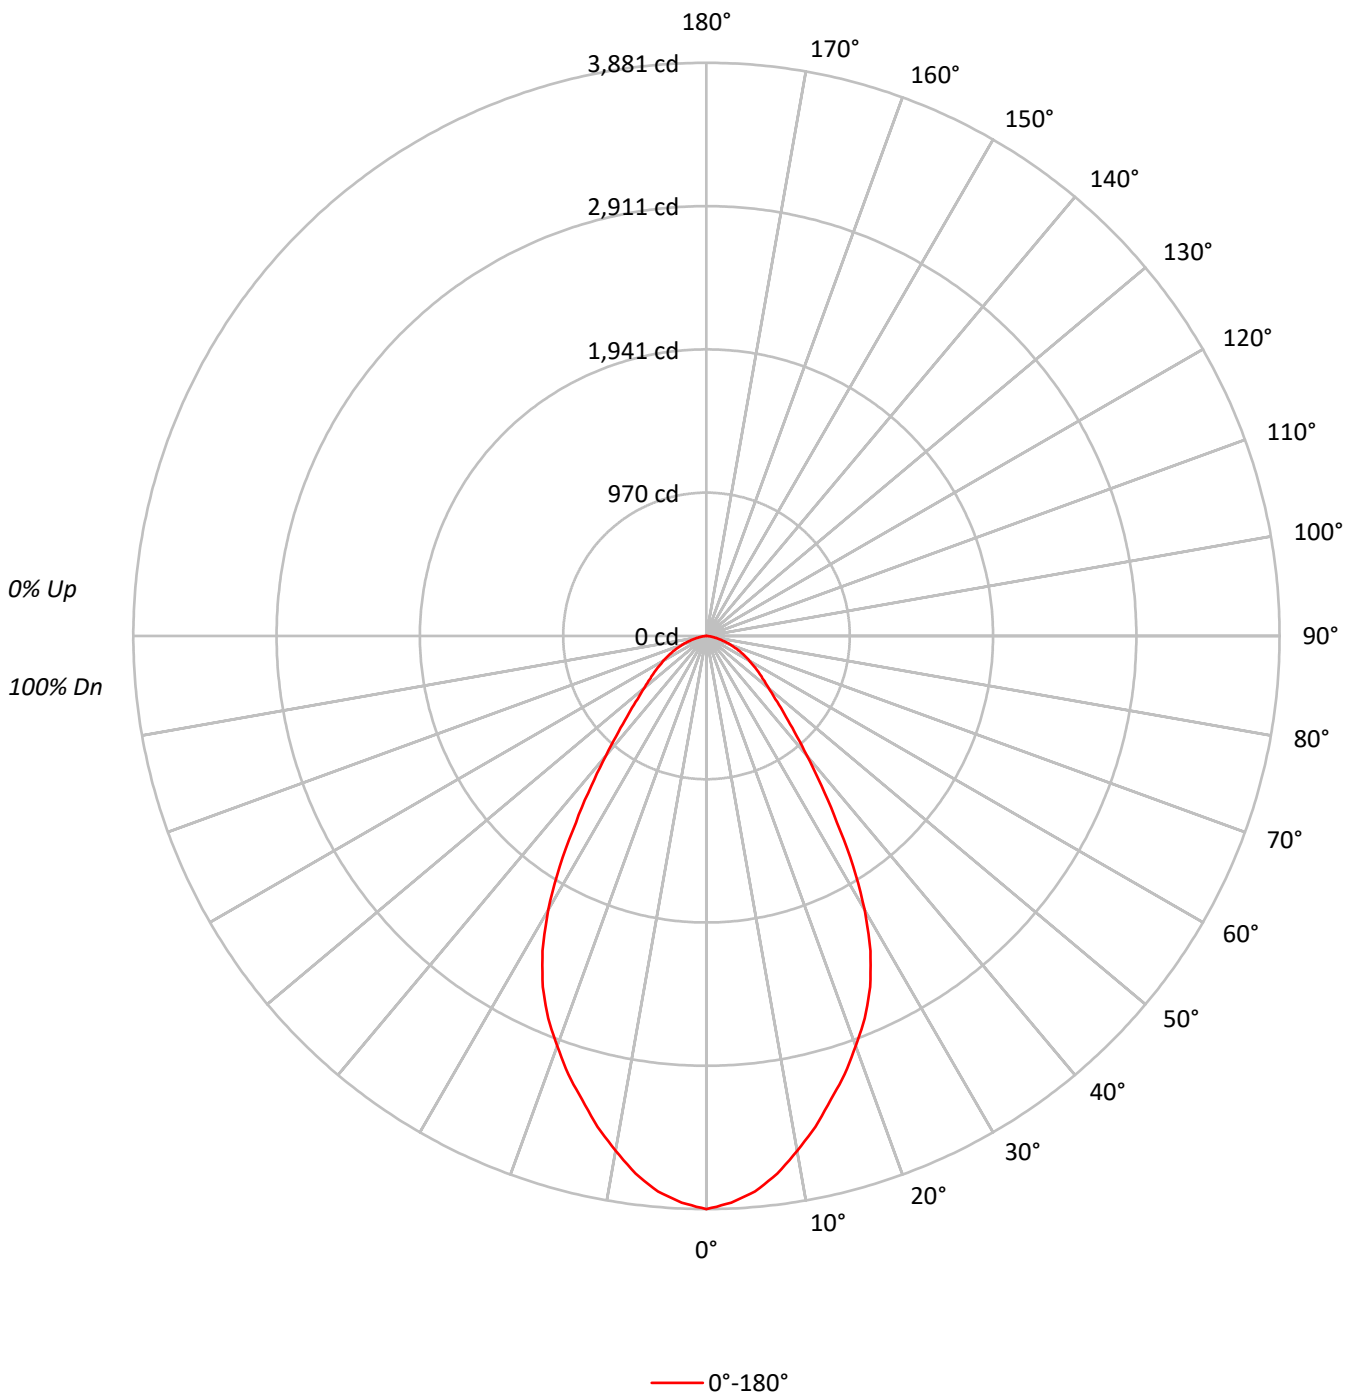



TEST NUMBER: P365773

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		83	78	75		80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68		76	71	67		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56		65	60	56		64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47		57	51	47		56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	106021
5°	103536
10°	98182
15°	91935
20°	85859
25°	79046
30°	67561
35°	51393
40°	37665
45°	28667
50°	23385
55°	20583
60°	18312
65°	16081
70°	13641
75°	10680
80°	7299
85°	3291



TEST NUMBER: P365773

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	352.9	7.4
10°-20°	913.8	19.1
20°-30°	1189.8	24.9
30°-40°	971.0	20.3
40°-50°	587.0	12.3
50°-60°	388.8	8.1
60°-70°	247.5	5.2
70°-80°	109.6	2.3
80°-90°	16.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2456.5	51.4
0°-40°	3427.5	71.8
0°-60°	4403.3	92.2
0°-90°	4777.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4777.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3881	
5°	3776	353
15°	3251	914
25°	2623	1190
35°	1541	971
45°	742	587
55°	432	389
65°	249	247
75°	101	110
85°	10	17
90°	0	



TEST NUMBER: P365773

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8050-F6LBXVM1-MW-BL86

CANDELA DISTRIBUTION (FULL):

0°	
0°	3881.4
2.5°	3841.3
5°	3776.0
7.5°	3672.6
10°	3539.8
12.5°	3404.9
15°	3251.0
17.5°	3111.8
20°	2953.7
22.5°	2801.9
25°	2622.7
27.5°	2403.5
30°	2142.0
32.5°	1849.0
35°	1541.2
37.5°	1279.7
40°	1056.3
42.5°	879.2
45°	742.1
47.5°	634.6
50°	550.3
52.5°	484.9
55°	432.2
57.5°	381.6
60°	335.2
62.5°	290.9
65°	248.8
67.5°	208.7
70°	170.8
72.5°	134.9
75°	101.2
77.5°	71.7
80°	46.4
82.5°	25.3
85°	10.5
87.5°	2.1
90°	0.0

(END OF REPORT)