

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365074

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365074
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-41)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS ACRYLIC, CLEAR 0.125", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6257.9 lumens
Efficiency: N/A
Efficacy: 85.3 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365074

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV

Luminous Intensity Polar Plot

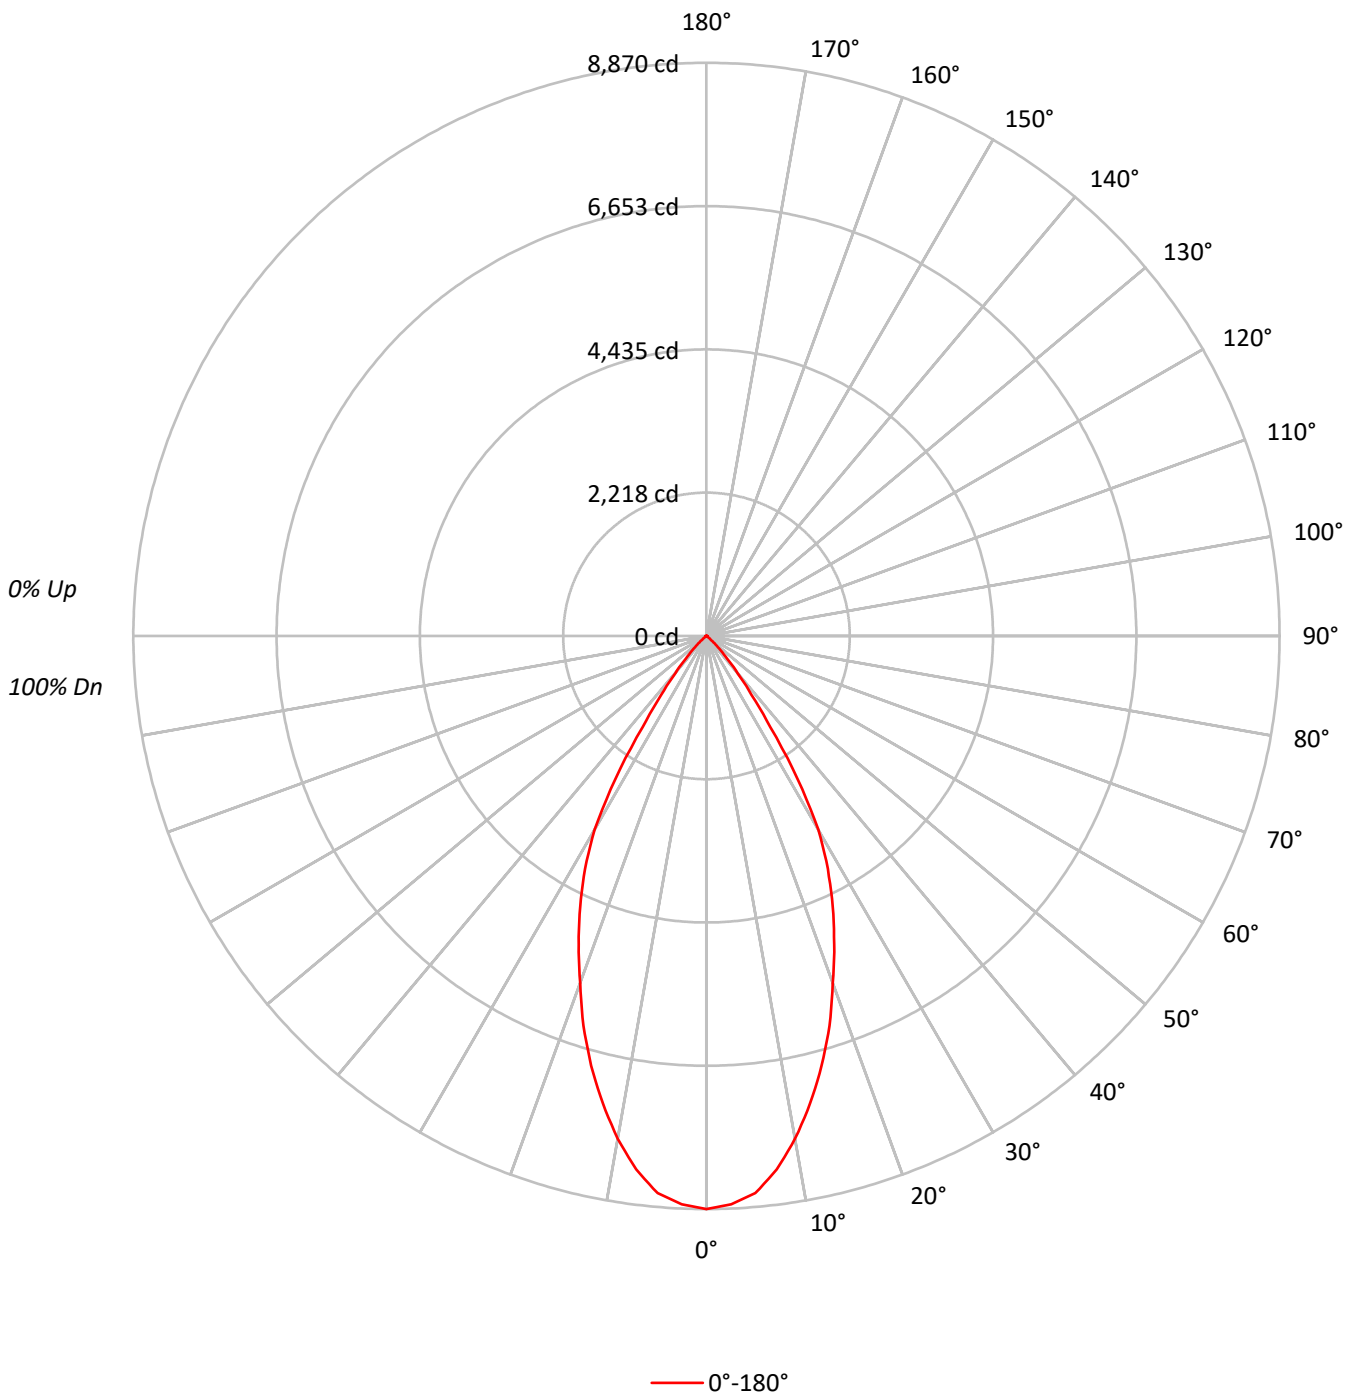



TEST NUMBER: P365074

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	81	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	73	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	59	56	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	242289
5°	237369
10°	219133
15°	194790
20°	166239
25°	139282
30°	109163
35°	57555
40°	26889
45°	10577
50°	2766
55°	748
60°	492
65°	433
70°	359
75°	475
80°	346
85°	689



TEST NUMBER: P365074

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	801.2	12.8
10°-20°	1912.9	30.6
20°-30°	2104.1	33.6
30°-40°	1161.5	18.6
40°-50°	245.0	3.9
50°-60°	20.0	0.3
60°-70°	6.1	0.1
70°-80°	5.0	0.1
80°-90°	2.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4818.2	77.0
0°-40°	5979.7	95.6
0°-60°	6244.7	99.8
0°-90°	6257.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6257.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8870	
5°	8657	801
15°	6888	1913
25°	4621	2104
35°	1726	1161
45°	274	245
55°	16	20
65°	7	6
75°	4	5
85°	2	2
90°	0	



TEST NUMBER: P365074

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-LI-BL89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	8870.1
2.5°	8802.8
5°	8656.9
7.5°	8326.9
10°	7900.5
12.5°	7411.2
15°	6888.2
17.5°	6327.1
20°	5718.9
22.5°	5166.7
25°	4621.3
27.5°	4067.0
30°	3461.0
32.5°	2635.0
35°	1726.0
37.5°	1146.9
40°	754.1
42.5°	475.8
45°	273.8
47.5°	143.6
50°	65.1
52.5°	26.9
55°	15.7
57.5°	11.2
60°	9.0
62.5°	6.7
65°	6.7
67.5°	4.5
70°	4.5
72.5°	6.7
75°	4.5
77.5°	4.5
80°	2.2
82.5°	2.2
85°	2.2
87.5°	2.2
90°	0.0

(END OF REPORT)