

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366518

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366518
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4822.0 lumens
Efficiency: N/A
Efficacy: 65.7 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366518

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

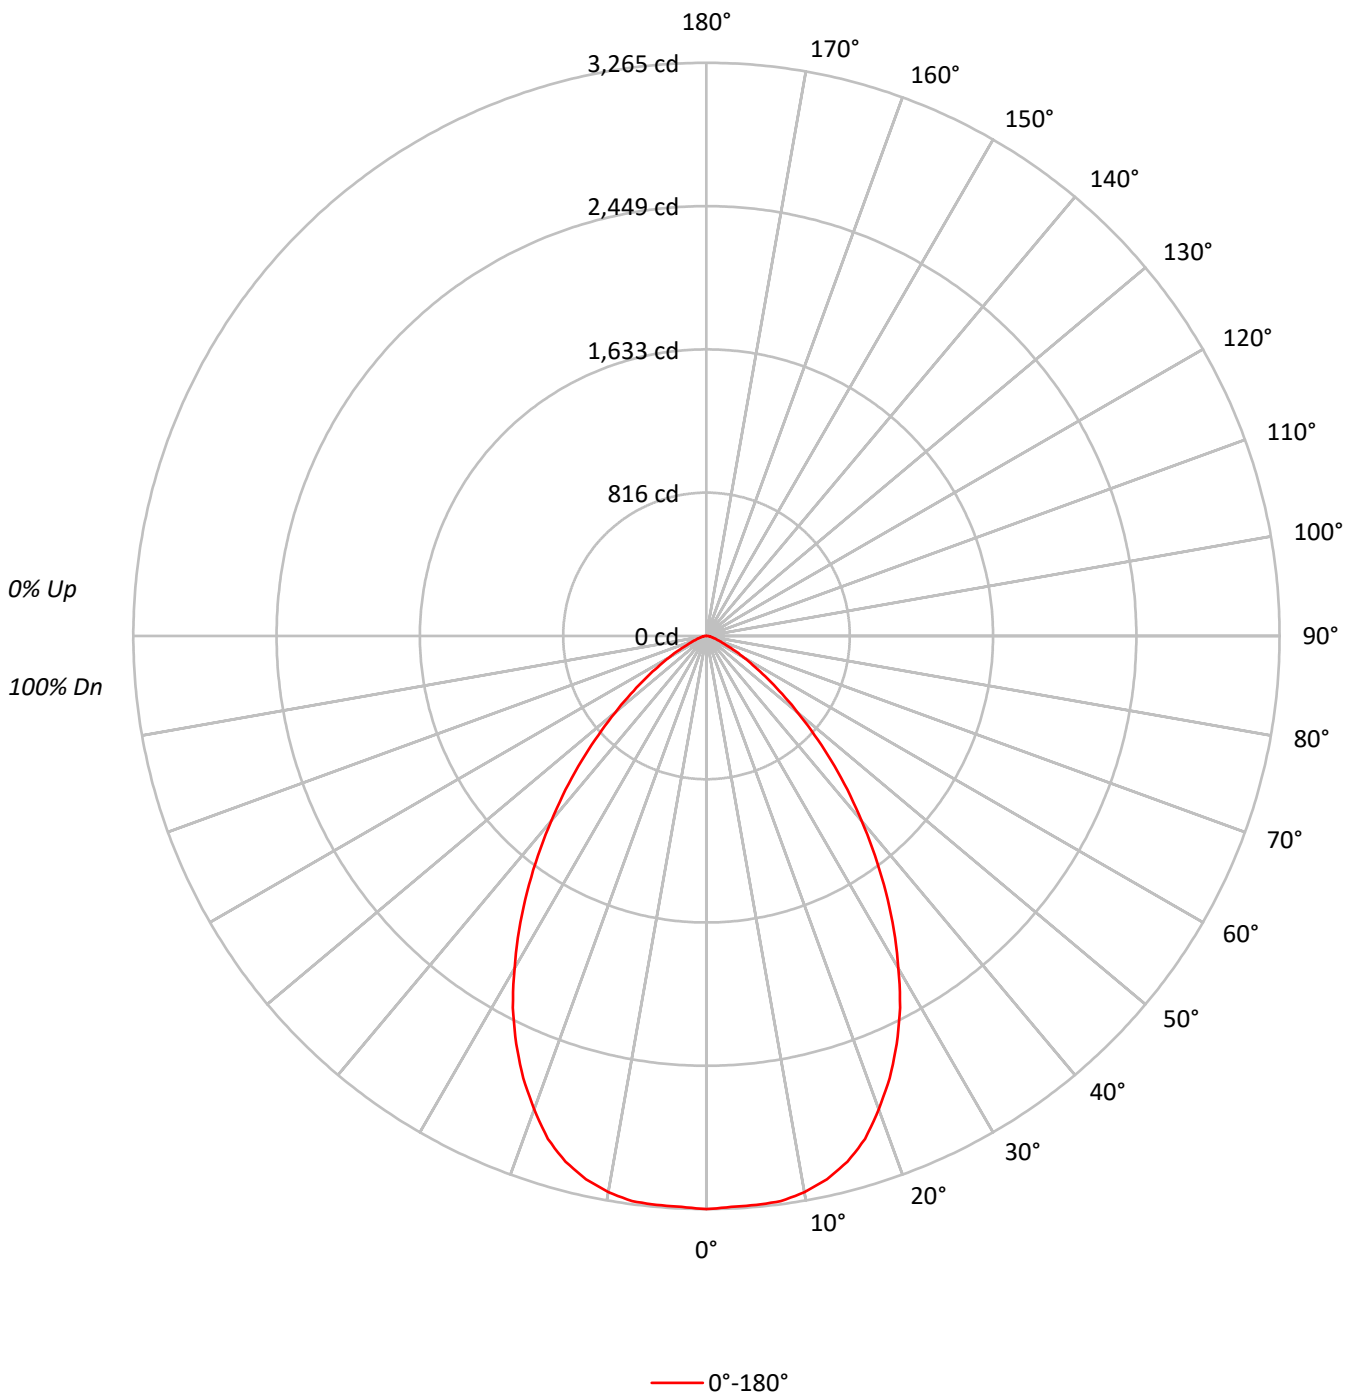



TEST NUMBER: P366518

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	233773
5°	233854
10°	233947
15°	229870
20°	218663
25°	202590
30°	180827
35°	155642
40°	128446
45°	101635
50°	75535
55°	53254
60°	35371
65°	21686
70°	14110
75°	10568
80°	9278
85°	11091



TEST NUMBER: P366518

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.6	6.4
10°-20°	868.1	18.0
20°-30°	1172.0	24.3
30°-40°	1108.9	23.0
40°-50°	777.3	16.1
50°-60°	391.1	8.1
60°-70°	138.2	2.9
70°-80°	43.2	0.9
80°-90°	13.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2349.8	48.7
0°-40°	3458.8	71.7
0°-60°	4627.2	96.0
0°-90°	4822.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4822.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3265	
5°	3254	310
15°	3101	868
25°	2564	1172
35°	1781	1109
45°	1004	777
55°	427	391
65°	128	138
75°	38	43
85°	14	13
90°	0	



TEST NUMBER: P366518

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	3264.9
2.5°	3255.9
5°	3253.6
7.5°	3246.9
10°	3217.7
12.5°	3170.6
15°	3101.0
17.5°	3004.4
20°	2869.7
22.5°	2726.0
25°	2564.3
27.5°	2389.2
30°	2187.1
32.5°	1987.2
35°	1780.6
37.5°	1576.3
40°	1374.2
42.5°	1187.8
45°	1003.7
47.5°	835.3
50°	678.1
52.5°	543.4
55°	426.6
57.5°	327.8
60°	247.0
62.5°	181.9
65°	128.0
67.5°	94.3
70°	67.4
72.5°	51.6
75°	38.2
77.5°	29.2
80°	22.5
82.5°	18.0
85°	13.5
87.5°	6.7
90°	0.0

(END OF REPORT)