

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365089

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365089
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-43)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6124.9 lumens
Efficiency: N/A
Efficacy: 83.4 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.82
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365089

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86

Luminous Intensity Polar Plot

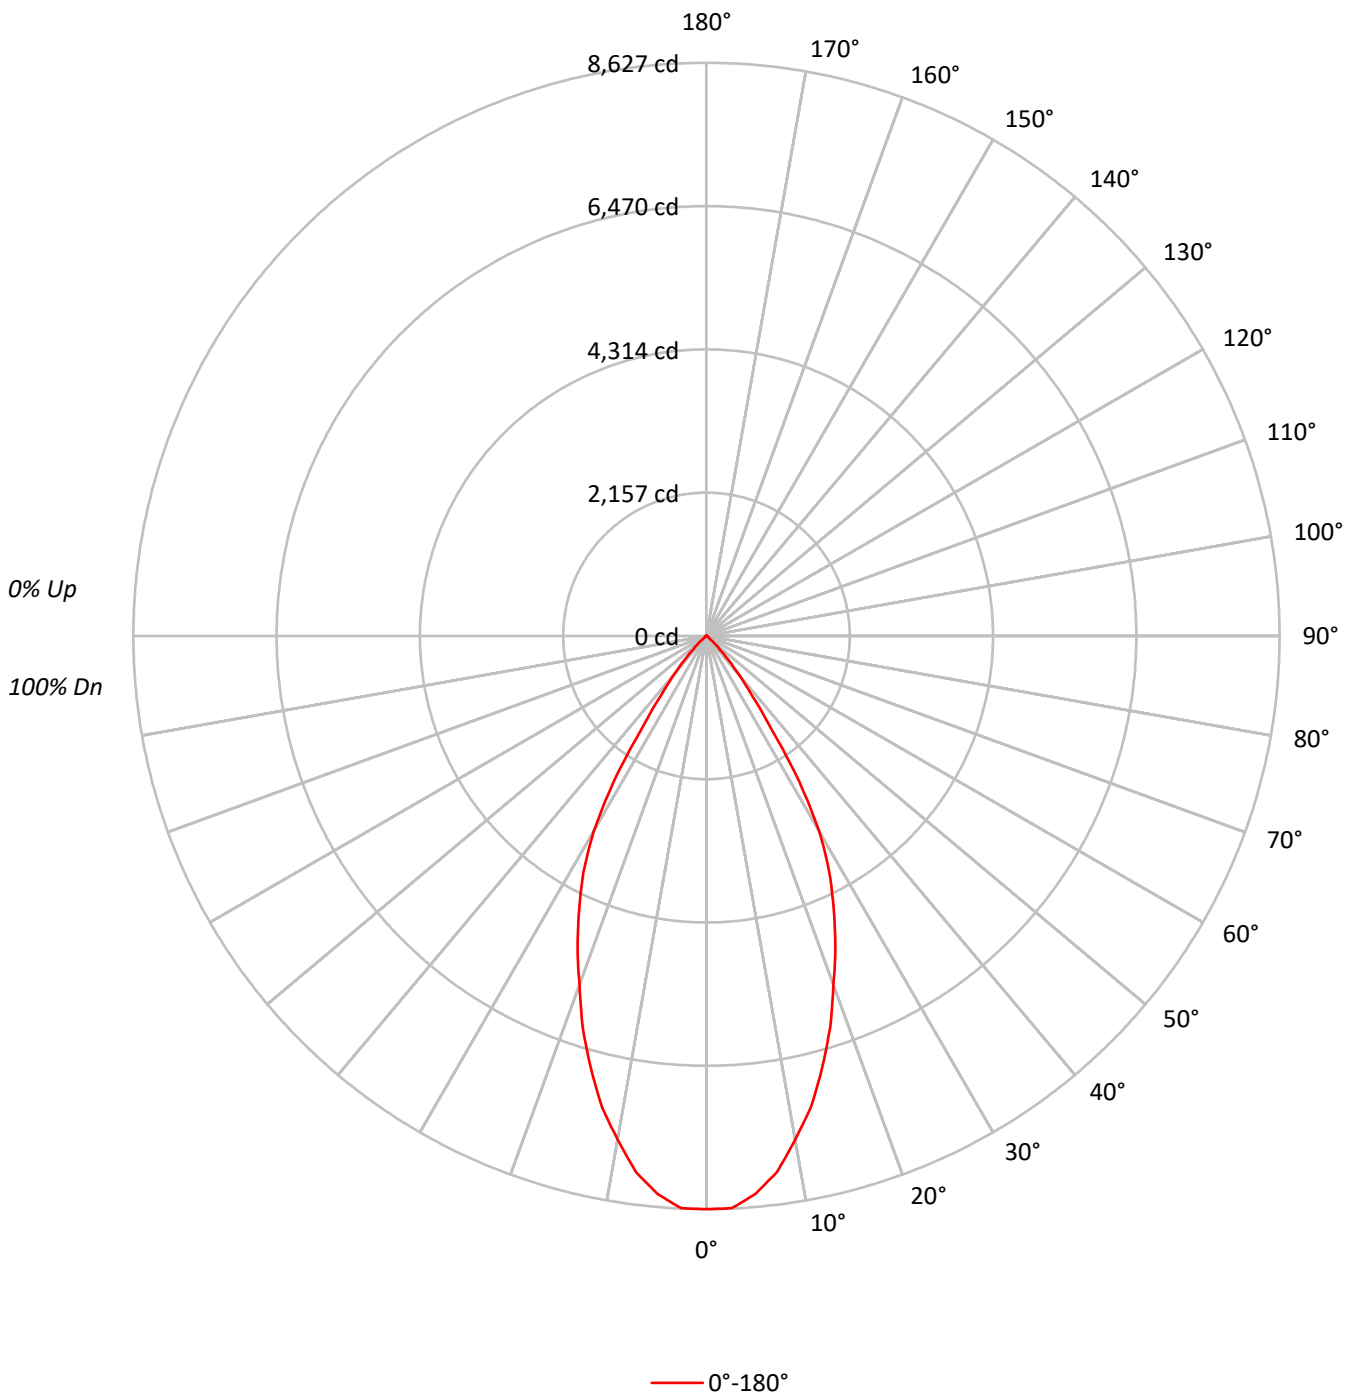



TEST NUMBER: P365089

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	72	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	58	56	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	235654
5°	231175
10°	213483
15°	190237
20°	162466
25°	136443
30°	107110
35°	55504
40°	26508
45°	10434
50°	2745
55°	771
60°	503
65°	446
70°	367
75°	485
80°	362
85°	721



TEST NUMBER: P365089

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	781.8	12.8
10°-20°	1869.6	30.5
20°-30°	2064.3	33.7
30°-40°	1135.9	18.5
40°-50°	240.1	3.9
50°-60°	20.3	0.3
60°-70°	6.2	0.1
70°-80°	4.5	0.1
80°-90°	2.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4715.7	77.0
0°-40°	5851.6	95.5
0°-60°	6111.9	99.8
0°-90°	6124.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6124.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8627	
5°	8431	782
15°	6727	1870
25°	4527	2064
35°	1664	1136
45°	270	240
55°	16	20
65°	7	6
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P365089

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BL86

CANDELA DISTRIBUTION (FULL):

0°	
0°	8627.2
2.5°	8622.6
5°	8431.0
7.5°	8135.5
10°	7696.8
12.5°	7260.5
15°	6727.2
17.5°	6184.7
20°	5589.1
22.5°	5067.3
25°	4527.1
27.5°	4005.4
30°	3395.9
32.5°	2592.5
35°	1664.5
37.5°	1122.0
40°	743.4
42.5°	464.0
45°	270.1
47.5°	138.5
50°	64.6
52.5°	27.7
55°	16.2
57.5°	11.5
60°	9.2
62.5°	6.9
65°	6.9
67.5°	4.6
70°	4.6
72.5°	6.9
75°	4.6
77.5°	2.3
80°	2.3
82.5°	2.3
85°	2.3
87.5°	2.3
90°	0.0

(END OF REPORT)