

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365097

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365097  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5307.0 lumens  
Efficiency: N/A  
Efficacy: 72.3 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365097

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84

### Luminous Intensity Polar Plot

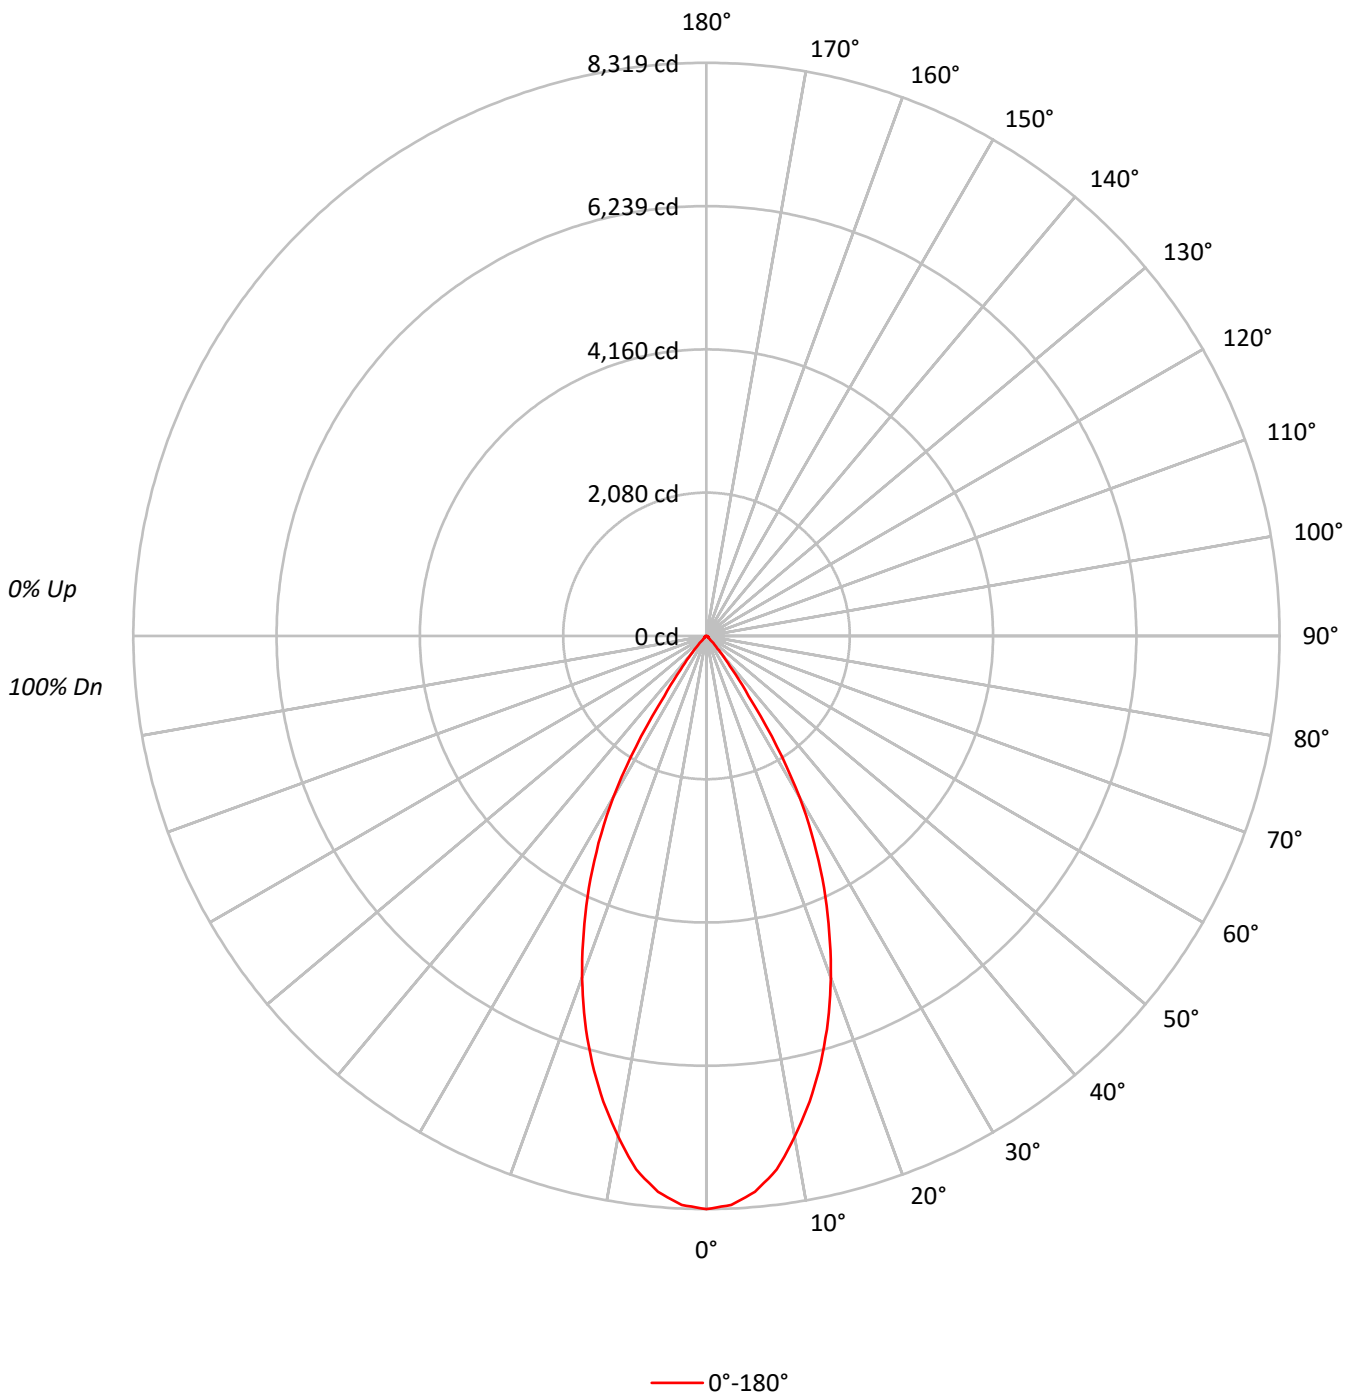



TEST NUMBER: P365097

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	595642
5°	582068
10°	536603
15°	475277
20°	402382
25°	318789
30°	224026
35°	93301
40°	32013
45°	8556
50°	4701
55°	4394
60°	4038
65°	3981
70°	3936
75°	4537
80°	5814
85°	9612



TEST NUMBER: P365097

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	750.5	14.1
10°-20°	1778.7	33.5
20°-30°	1826.0	34.4
30°-40°	773.2	14.6
40°-50°	95.1	1.8
50°-60°	31.5	0.6
60°-70°	23.2	0.4
70°-80°	18.0	0.3
80°-90°	10.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4355.2	82.1
0°-40°	5128.4	96.6
0°-60°	5254.9	99.0
0°-90°	5307.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5307.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8319	
5°	8098	750
15°	6412	1779
25°	4035	1826
35°	1067	773
45°	84	95
55°	35	31
65°	24	23
75°	16	18
85°	12	11
90°	0	



TEST NUMBER: P365097

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR84

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8318.8
2.5°	8264.9
5°	8098.3
7.5°	7812.1
10°	7380.4
12.5°	6920.6
15°	6411.6
17.5°	5864.9
20°	5280.8
22.5°	4659.1
25°	4035.1
27.5°	3389.9
30°	2709.6
32.5°	1909.6
35°	1067.4
37.5°	612.3
40°	342.5
42.5°	180.6
45°	84.5
47.5°	49.3
50°	42.2
52.5°	37.5
55°	35.2
57.5°	32.8
60°	28.2
62.5°	25.8
65°	23.5
67.5°	21.1
70°	18.8
72.5°	18.8
75°	16.4
77.5°	16.4
80°	14.1
82.5°	14.1
85°	11.7
87.5°	7.0
90°	0.0

(END OF REPORT)