

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365099

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365099
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5104.0 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365099

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86

Luminous Intensity Polar Plot

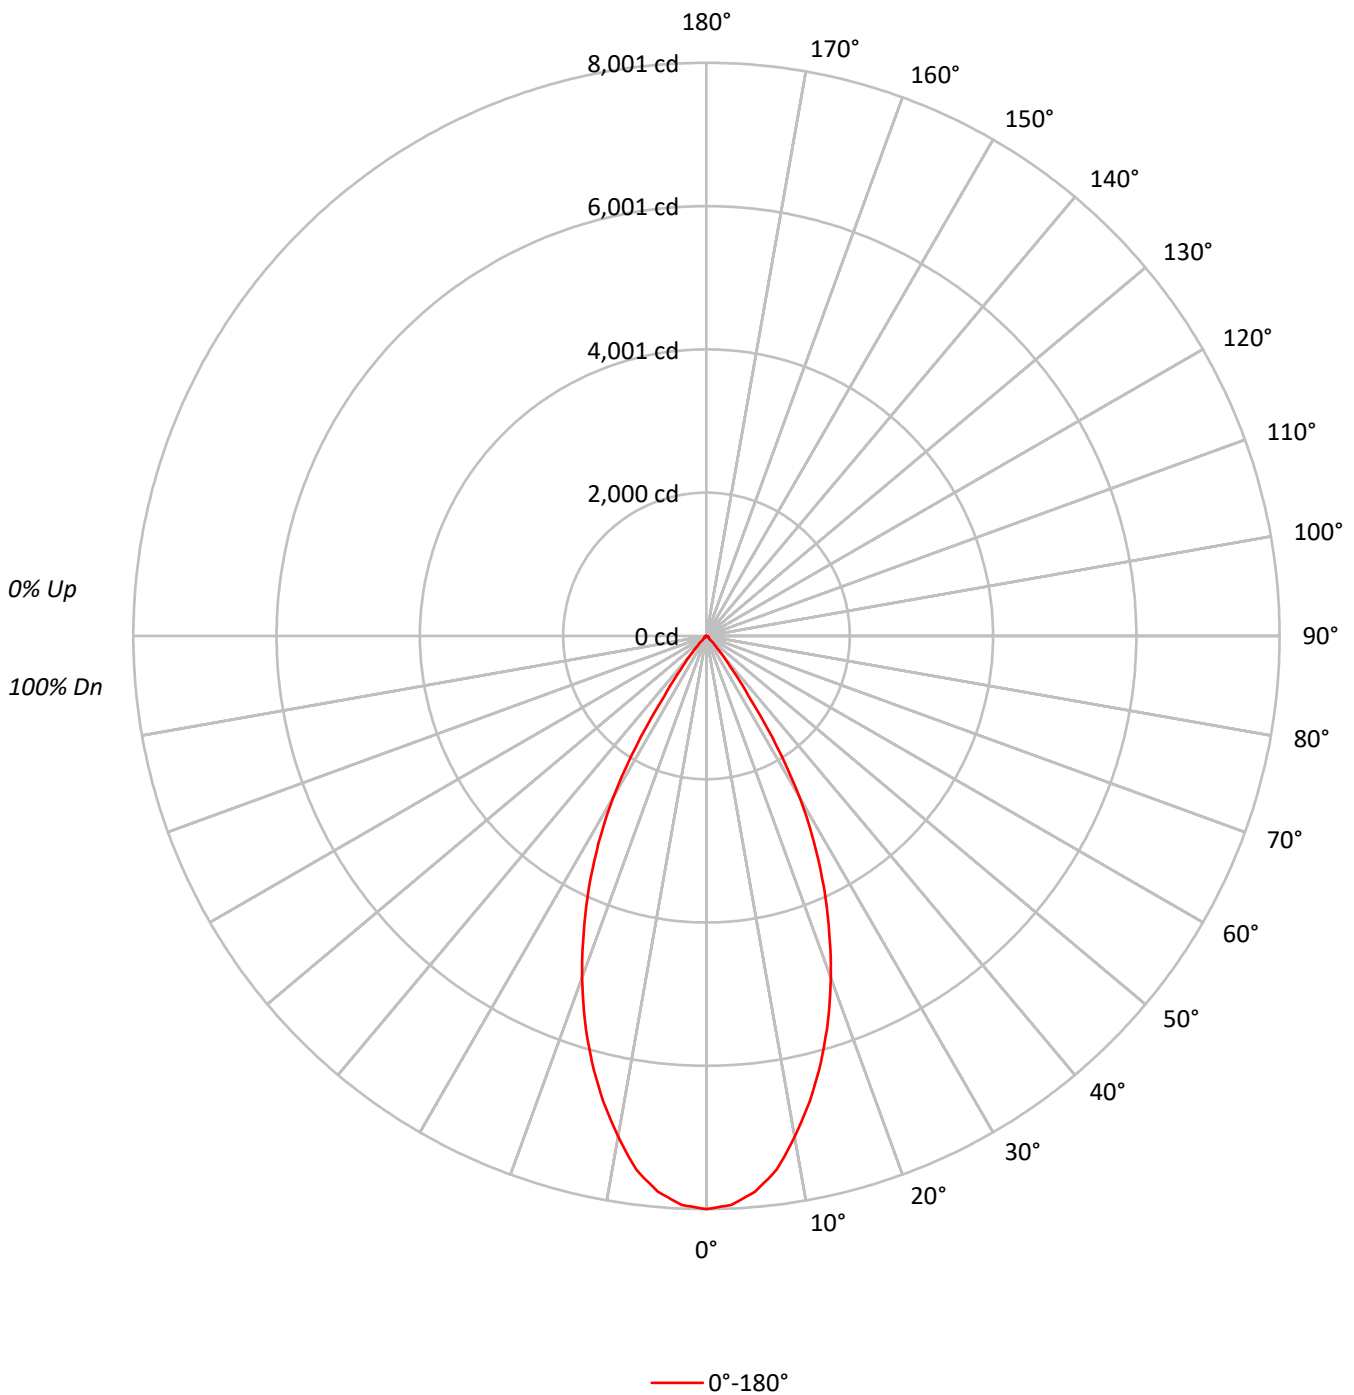



TEST NUMBER: P365099

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	572858
5°	559801
10°	516077
15°	457094
20°	386990
25°	306590
30°	215461
35°	89735
40°	30789
45°	8222
50°	4523
55°	4219
60°	3881
65°	3829
70°	3768
75°	4371
80°	5567
85°	9283



TEST NUMBER: P365099

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	721.8	14.1
10°-20°	1710.7	33.5
20°-30°	1756.2	34.4
30°-40°	743.7	14.6
40°-50°	91.4	1.8
50°-60°	30.3	0.6
60°-70°	22.3	0.4
70°-80°	17.3	0.3
80°-90°	10.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4188.6	82.1
0°-40°	4932.2	96.6
0°-60°	5053.9	99.0
0°-90°	5104.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5104.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8001	
5°	7788	722
15°	6166	1711
25°	3881	1756
35°	1027	744
45°	81	91
55°	34	30
65°	23	22
75°	16	17
85°	11	10
90°	0	



TEST NUMBER: P365099

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-LI-BTR86

CANDELA DISTRIBUTION (FULL):

0°	
0°	8000.6
2.5°	7948.7
5°	7788.5
7.5°	7513.3
10°	7098.1
12.5°	6655.9
15°	6166.3
17.5°	5640.6
20°	5078.8
22.5°	4480.9
25°	3880.7
27.5°	3260.3
30°	2606.0
32.5°	1836.6
35°	1026.6
37.5°	588.9
40°	329.4
42.5°	173.7
45°	81.2
47.5°	47.4
50°	40.6
52.5°	36.1
55°	33.8
57.5°	31.6
60°	27.1
62.5°	24.8
65°	22.6
67.5°	20.3
70°	18.0
72.5°	18.0
75°	15.8
77.5°	15.8
80°	13.5
82.5°	13.5
85°	11.3
87.5°	6.8
90°	0.0

(END OF REPORT)