

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366532

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366532
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-45)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS ACRYLIC, CLEAR 0.125", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6436.0 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366532

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV

Luminous Intensity Polar Plot

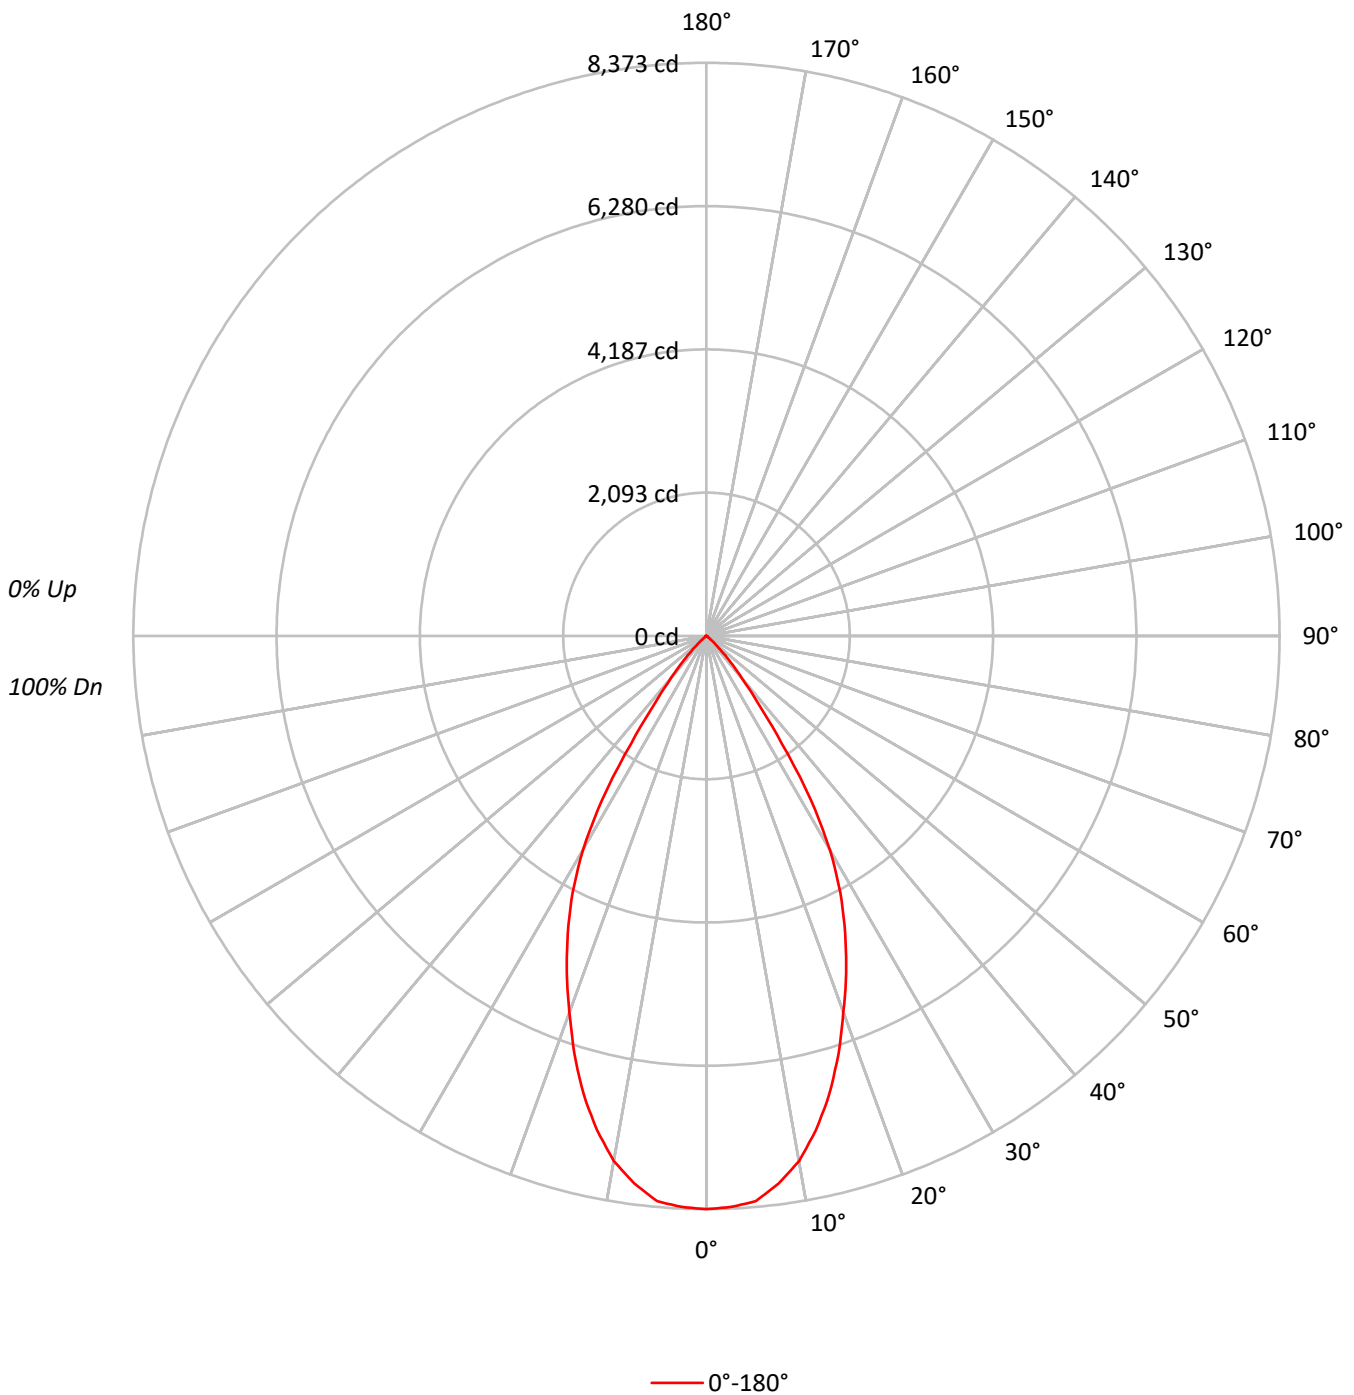



TEST NUMBER: P366532

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	88	86	84	82
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	78	77
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	80	76	74	72
6	89	81	75	71	88	80	74	71	78	74	70	77	73	70	76	72	69	68
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60
9	77	68	62	59	76	68	62	58	67	62	58	66	61	58	65	61	58	57
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	228713
5°	227207
10°	216035
15°	196035
20°	170061
25°	144568
30°	113765
35°	64091
40°	28786
45°	11967
50°	3591
55°	1005
60°	639
65°	452
70°	375
75°	496
80°	362
85°	0



TEST NUMBER: P366532

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	773.8	12.0
10°-20°	1924.1	29.9
20°-30°	2178.7	33.9
30°-40°	1249.2	19.4
40°-50°	271.5	4.2
50°-60°	26.6	0.4
60°-70°	7.8	0.1
70°-80°	4.0	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4876.6	75.8
0°-40°	6125.8	95.2
0°-60°	6423.9	99.8
0°-90°	6436.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6436.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8373	
5°	8286	774
15°	6932	1924
25°	4797	2179
35°	1922	1249
45°	310	271
55°	21	27
65°	7	8
75°	5	4
85°	0	0
90°	0	



TEST NUMBER: P366532

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8030-F6LBXVM1-WMH-BL89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	8373.1
2.5°	8349.6
5°	8286.3
7.5°	8068.0
10°	7788.8
12.5°	7389.8
15°	6932.2
17.5°	6406.5
20°	5850.4
22.5°	5329.4
25°	4796.7
27.5°	4233.5
30°	3606.9
32.5°	2841.9
35°	1922.0
37.5°	1215.6
40°	807.3
42.5°	516.3
45°	309.8
47.5°	169.0
50°	84.5
52.5°	35.2
55°	21.1
57.5°	16.4
60°	11.7
62.5°	9.4
65°	7.0
67.5°	7.0
70°	4.7
72.5°	4.7
75°	4.7
77.5°	2.3
80°	2.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)