

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365110

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365110  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-41)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,  
BOTTOM LENS ACRYLIC, CLEAR 0.125", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6673.1 lumens  
Efficiency: N/A  
Efficacy: 90.9 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365110

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV

### Luminous Intensity Polar Plot

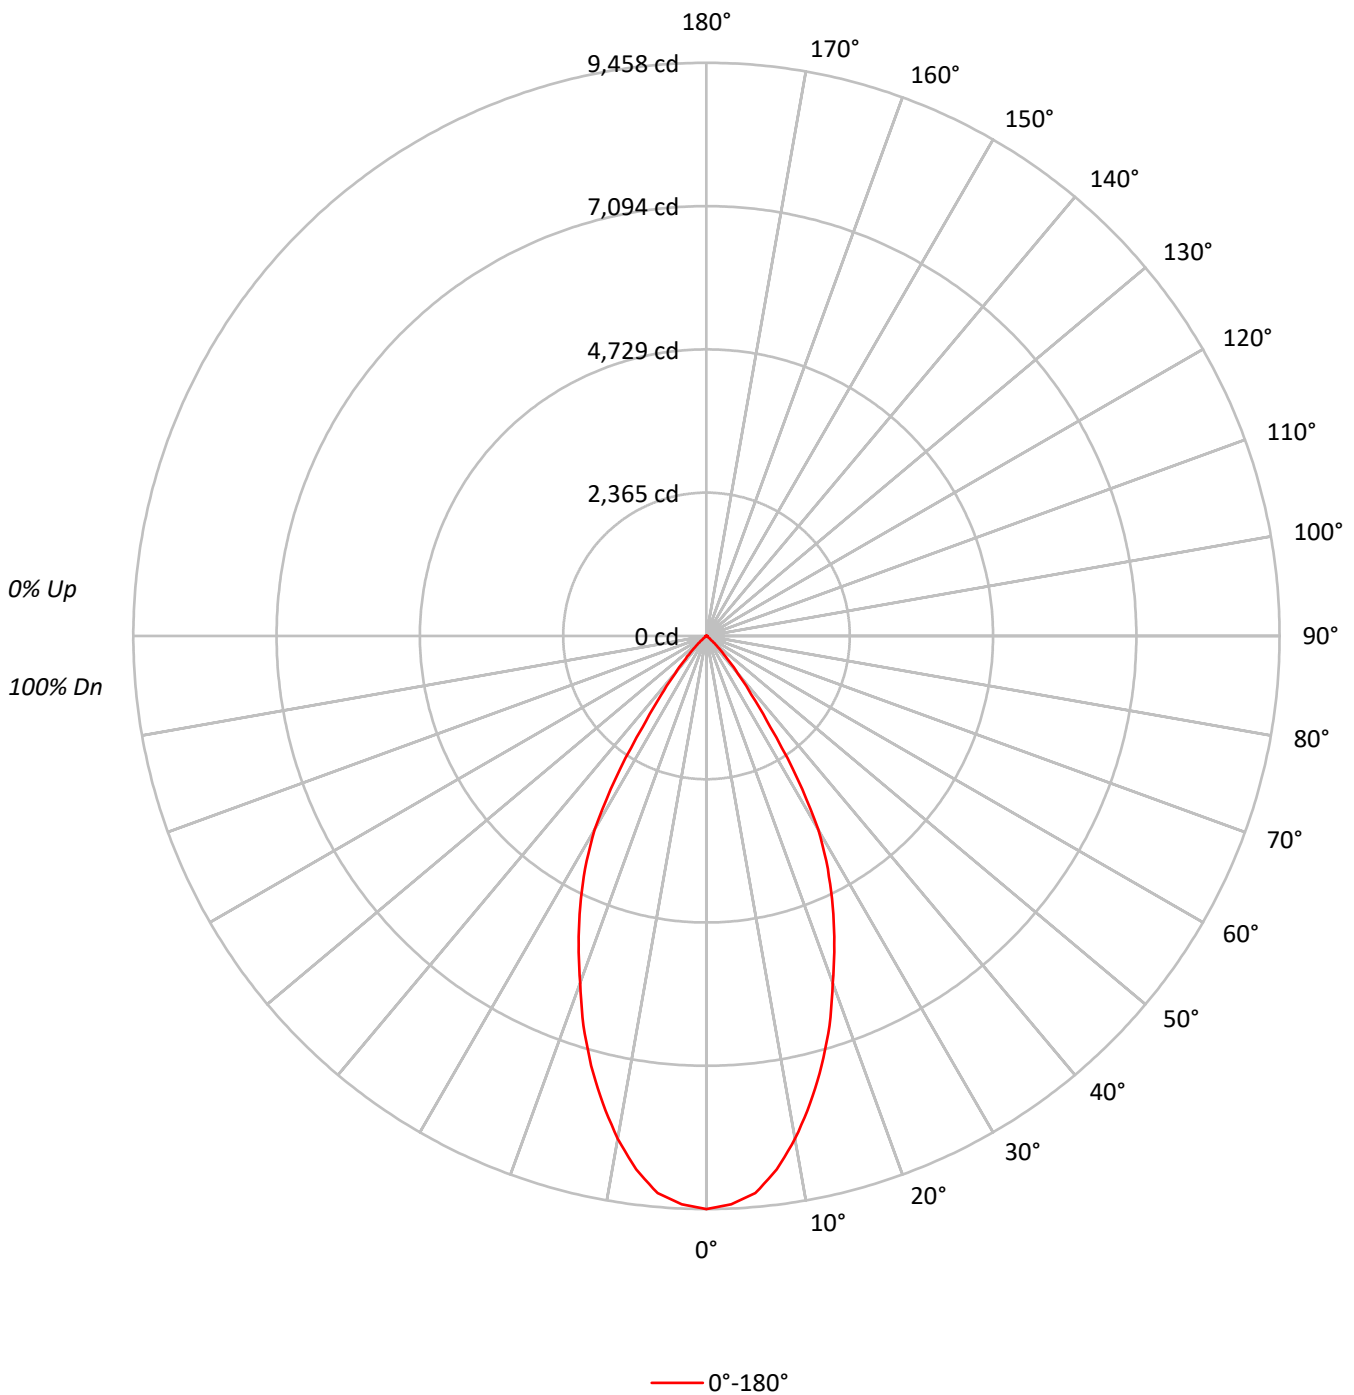



TEST NUMBER: P365110

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	81	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	73	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	59	56	54

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	258356
5°	253108
10°	233665
15°	207708
20°	177261
25°	148519
30°	116402
35°	61370
40°	28672
45°	11280
50°	2949
55°	800
60°	524
65°	465
70°	383
75°	507
80°	378
85°	752



TEST NUMBER: P365110

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	854.3	12.8
10°-20°	2039.8	30.6
20°-30°	2243.7	33.6
30°-40°	1238.5	18.6
40°-50°	261.3	3.9
50°-60°	21.3	0.3
60°-70°	6.5	0.1
70°-80°	5.4	0.1
80°-90°	2.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5137.7	77.0
0°-40°	6376.2	95.6
0°-60°	6658.9	99.8
0°-90°	6673.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6673.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9458	
5°	9231	854
15°	7345	2040
25°	4928	2244
35°	1840	1239
45°	292	261
55°	17	21
65°	7	7
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P365110

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8035-F6LBXVM1-LI-BL89BV

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9458.3
2.5°	9386.5
5°	9230.9
7.5°	8879.1
10°	8424.4
12.5°	7902.7
15°	7345.0
17.5°	6746.7
20°	6098.1
22.5°	5509.4
25°	4927.8
27.5°	4336.7
30°	3690.5
32.5°	2809.7
35°	1840.4
37.5°	1223.0
40°	804.1
42.5°	507.4
45°	292.0
47.5°	153.2
50°	69.4
52.5°	28.7
55°	16.8
57.5°	12.0
60°	9.6
62.5°	7.2
65°	7.2
67.5°	4.8
70°	4.8
72.5°	7.2
75°	4.8
77.5°	4.8
80°	2.4
82.5°	2.4
85°	2.4
87.5°	2.4
90°	0.0

(END OF REPORT)