

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366564

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366564
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.187", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6318.0 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366564

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85

Luminous Intensity Polar Plot

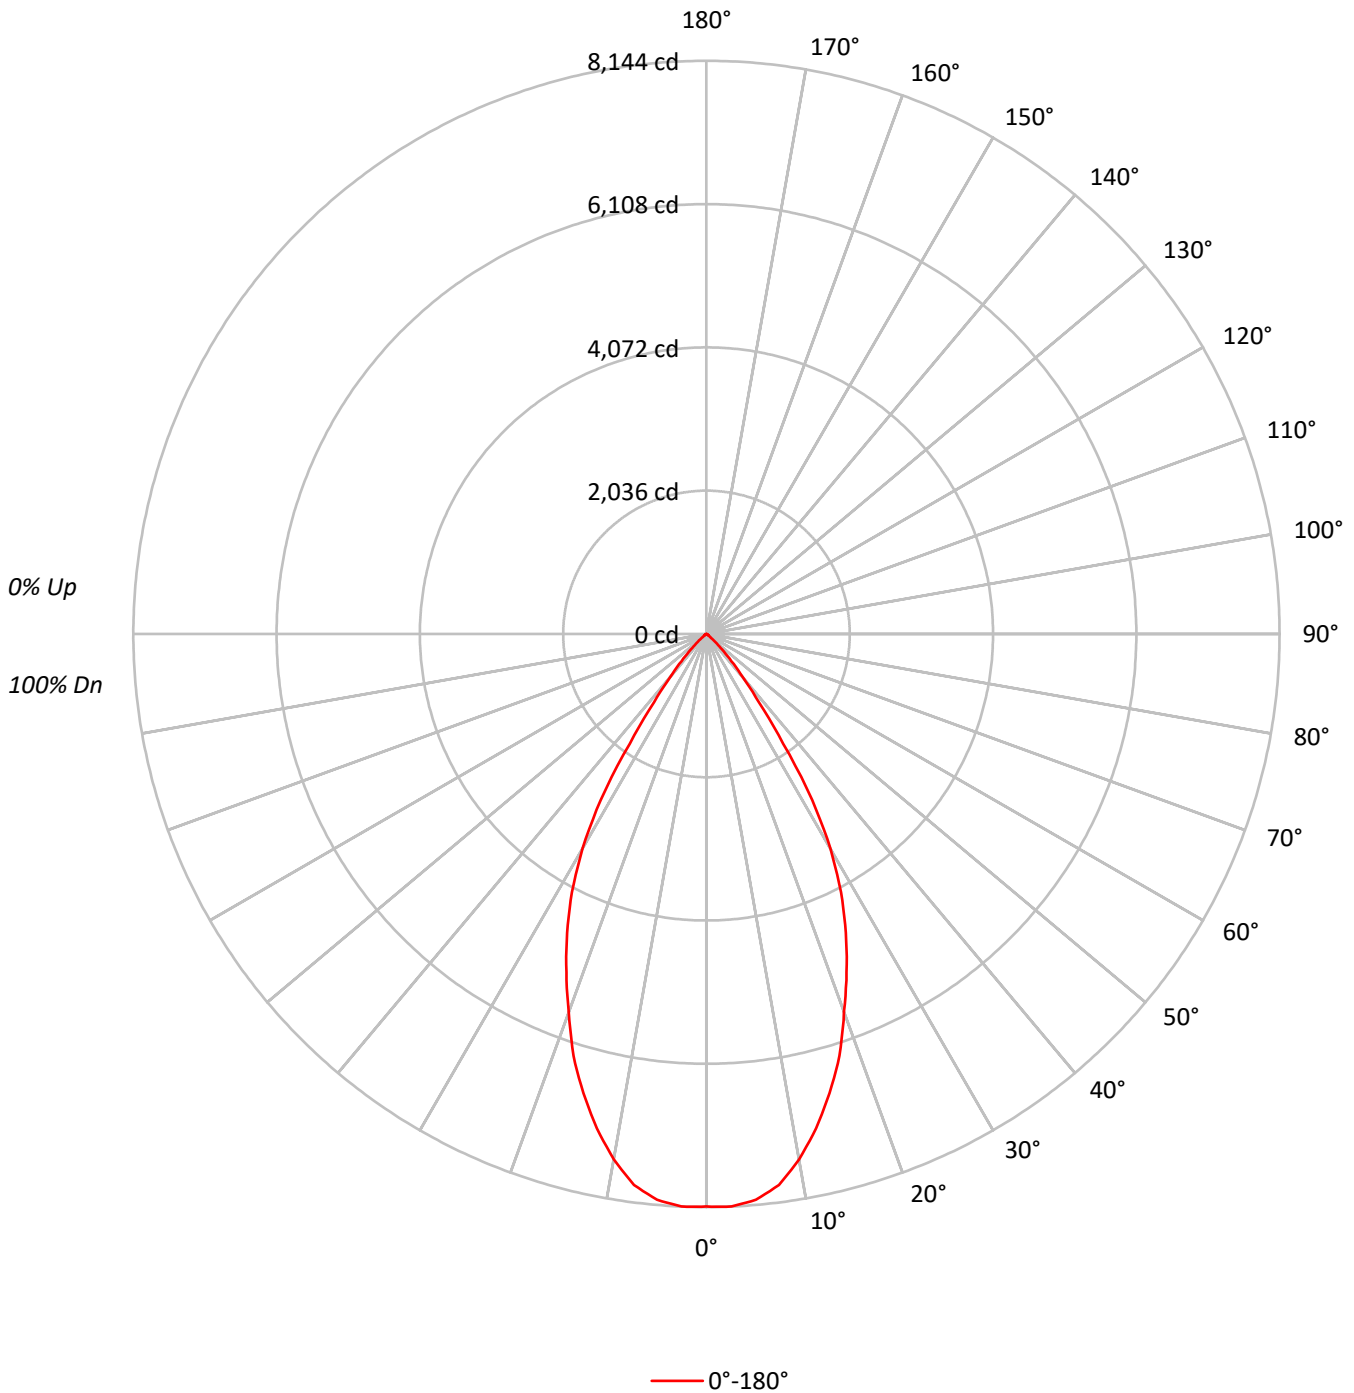



TEST NUMBER: P366564

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	222262
5°	221328
10°	210249
15°	190981
20°	166186
25°	141289
30°	111144
35°	63414
40°	28533
45°	12010
50°	3791
55°	1148
60°	792
65°	620
70°	575
75°	760
80°	378
85°	752



TEST NUMBER: P366564

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	755.0	12.0
10°-20°	1878.6	29.7
20°-30°	2128.8	33.7
30°-40°	1234.1	19.5
40°-50°	273.7	4.3
50°-60°	30.0	0.5
60°-70°	9.8	0.2
70°-80°	6.3	0.1
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	4762.4	75.4
0°-40°	5996.5	94.9
0°-60°	6300.2	99.7
0°-90°	6318.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6318.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8137	
5°	8072	755
15°	6754	1879
25°	4688	2129
35°	1902	1234
45°	311	274
55°	24	30
65°	10	10
75°	7	6
85°	2	2
90°	0	



TEST NUMBER: P366564

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BL85

CANDELA DISTRIBUTION (FULL):

0°	
0°	8136.9
2.5°	8144.2
5°	8071.9
7.5°	7895.9
10°	7580.2
12.5°	7197.0
15°	6753.5
17.5°	6285.9
20°	5717.1
22.5°	5203.7
25°	4687.9
27.5°	4138.4
30°	3523.8
32.5°	2798.3
35°	1901.7
37.5°	1222.0
40°	800.2
42.5°	523.0
45°	310.9
47.5°	173.5
50°	89.2
52.5°	41.0
55°	24.1
57.5°	19.3
60°	14.5
62.5°	12.1
65°	9.6
67.5°	7.2
70°	7.2
72.5°	7.2
75°	7.2
77.5°	4.8
80°	2.4
82.5°	2.4
85°	2.4
87.5°	0.0
90°	0.0

(END OF REPORT)