

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366575

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366575  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5181.0 lumens  
Efficiency: N/A  
Efficacy: 70.6 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366575

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86

### Luminous Intensity Polar Plot

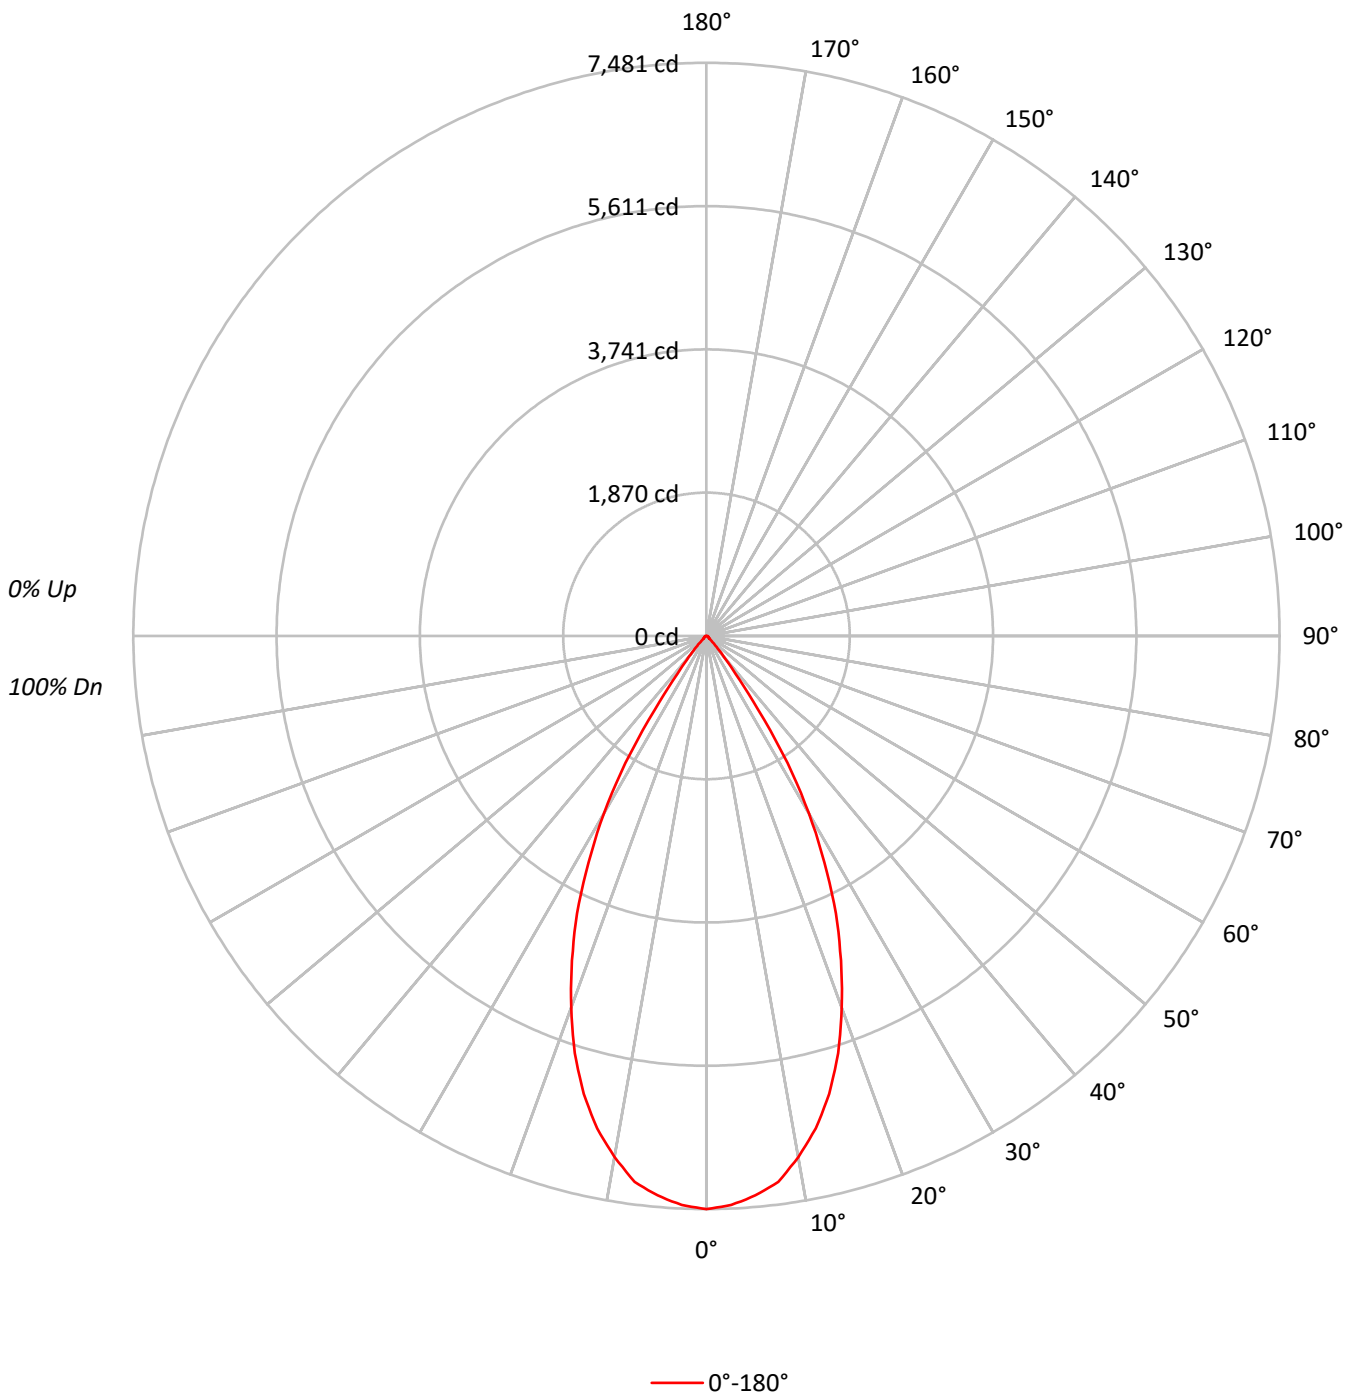



TEST NUMBER: P366575

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	535661
5°	526839
10°	501994
15°	458710
20°	393375
25°	315636
30°	221298
35°	102243
40°	32817
45°	10592
50°	4924
55°	4357
60°	4325
65°	3948
70°	3894
75°	4509
80°	5773
85°	9530



TEST NUMBER: P366575

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	687.4	13.3
10°-20°	1712.4	33.1
20°-30°	1798.4	34.7
30°-40°	798.0	15.4
40°-50°	103.1	2.0
50°-60°	32.2	0.6
60°-70°	22.7	0.4
70°-80°	16.6	0.3
80°-90°	10.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4198.2	81.0
0°-40°	4996.2	96.4
0°-60°	5131.5	99.0
0°-90°	5181.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5181.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7481	
5°	7330	687
15°	6188	1712
25°	3995	1798
35°	1170	798
45°	105	103
55°	35	32
65°	23	23
75°	16	17
85°	12	10
90°	0	



TEST NUMBER: P366575

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8040-F6LBXVM1-WMH-BTR86

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7481.1
2.5°	7434.6
5°	7329.9
7.5°	7188.1
10°	6904.4
12.5°	6585.8
15°	6188.1
17.5°	5711.4
20°	5162.6
22.5°	4585.9
25°	3995.2
27.5°	3332.4
30°	2676.6
32.5°	1967.4
35°	1169.7
37.5°	623.2
40°	351.1
42.5°	193.0
45°	104.6
47.5°	53.5
50°	44.2
52.5°	39.5
55°	34.9
57.5°	32.6
60°	30.2
62.5°	25.6
65°	23.3
67.5°	18.6
70°	18.6
72.5°	16.3
75°	16.3
77.5°	14.0
80°	14.0
82.5°	11.6
85°	11.6
87.5°	7.0
90°	0.0

(END OF REPORT)