

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365146

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365146  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-41)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,  
BOTTOM LENS ACRYLIC, CLEAR 0.125", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6907.0 lumens  
Efficiency: N/A  
Efficacy: 94.1 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365146

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV

### Luminous Intensity Polar Plot

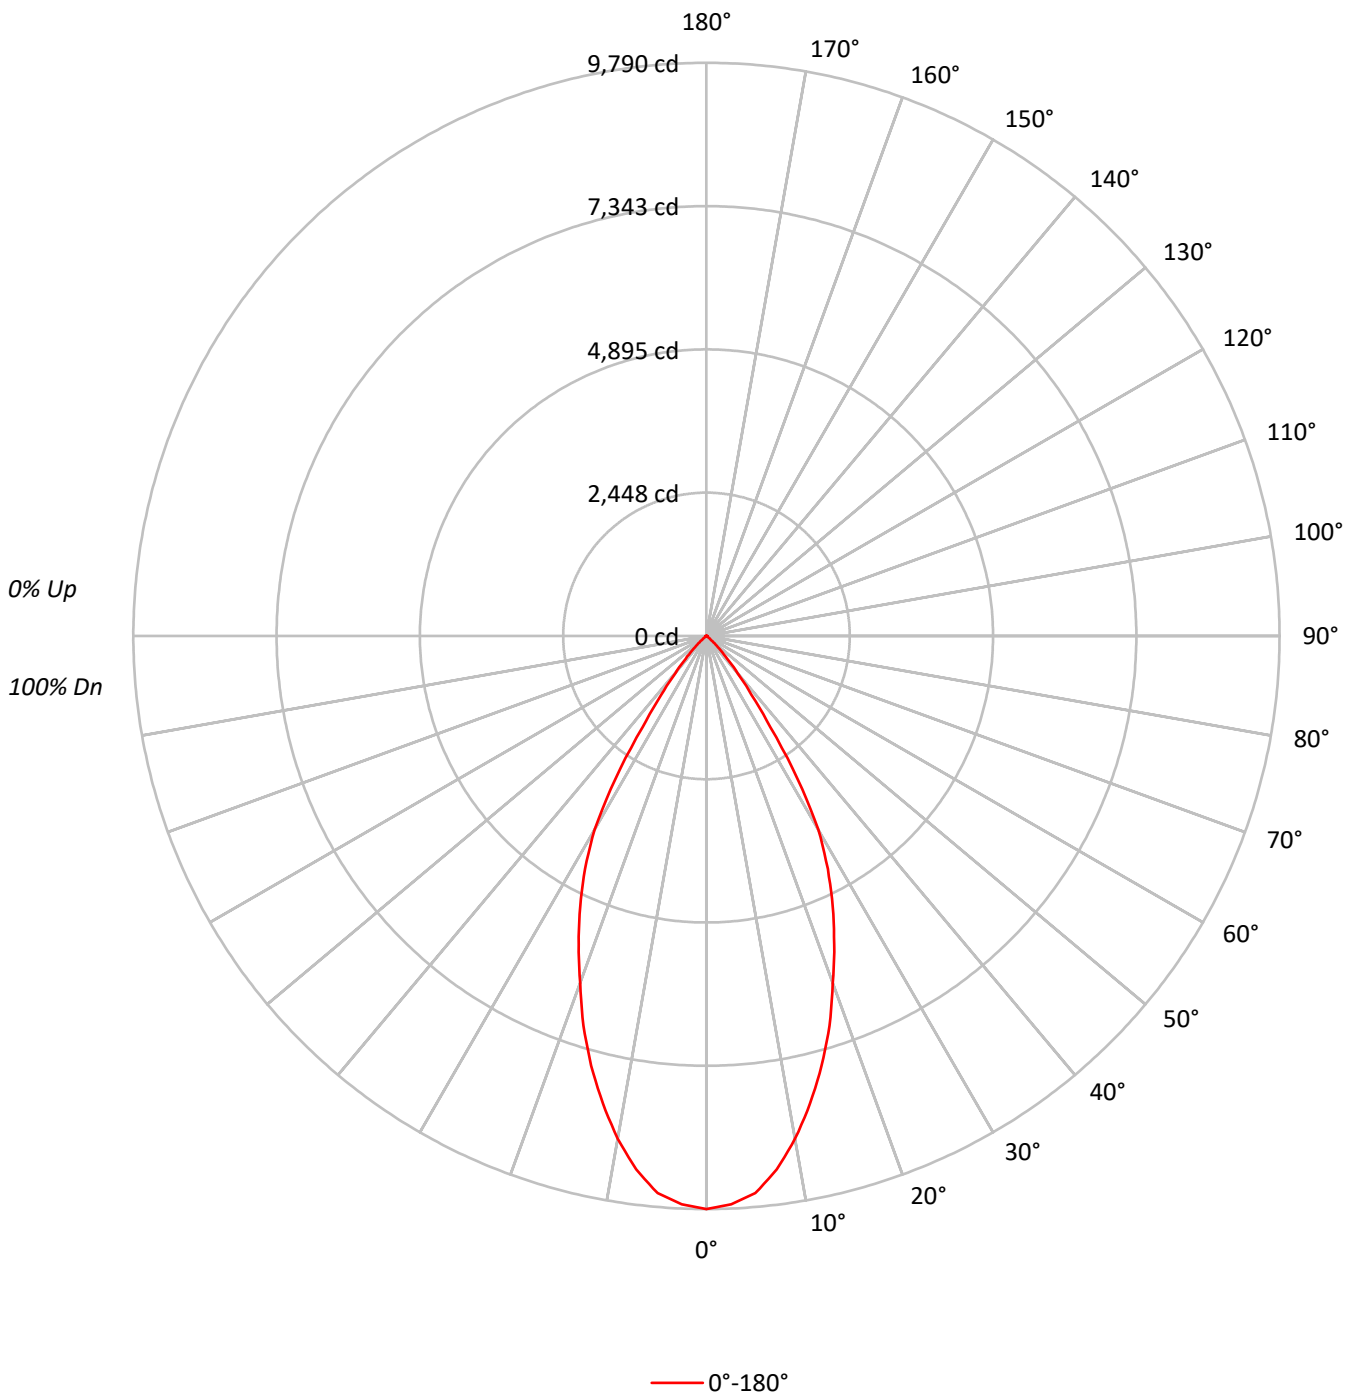



TEST NUMBER: P365146

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	81	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	73	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	59	56	54

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	267416
5°	261983
10°	241858
15°	214993
20°	183479
25°	153727
30°	120483
35°	63524
40°	29678
45°	11674
50°	3051
55°	824
60°	541
65°	478
70°	399
75°	528
80°	393
85°	784



TEST NUMBER: P365146

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	884.2	12.8
10°-20°	2111.3	30.6
20°-30°	2322.3	33.6
30°-40°	1282.0	18.6
40°-50°	270.5	3.9
50°-60°	22.0	0.3
60°-70°	6.7	0.1
70°-80°	5.6	0.1
80°-90°	2.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5317.9	77.0
0°-40°	6599.8	95.6
0°-60°	6892.3	99.8
0°-90°	6907.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6907.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9790	
5°	9555	884
15°	7603	2111
25°	5101	2322
35°	1905	1282
45°	302	270
55°	17	22
65°	7	7
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P365146

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BL89BV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	9790.0
2.5°	9715.7
5°	9554.6
7.5°	9190.5
10°	8719.8
12.5°	8179.8
15°	7602.6
17.5°	6983.3
20°	6312.0
22.5°	5702.6
25°	5100.6
27.5°	4488.7
30°	3819.9
32.5°	2908.3
35°	1905.0
37.5°	1265.9
40°	832.3
42.5°	525.2
45°	302.2
47.5°	158.5
50°	71.8
52.5°	29.7
55°	17.3
57.5°	12.4
60°	9.9
62.5°	7.4
65°	7.4
67.5°	5.0
70°	5.0
72.5°	7.4
75°	5.0
77.5°	5.0
80°	2.5
82.5°	2.5
85°	2.5
87.5°	2.5
90°	0.0

(END OF REPORT)