

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365150

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365150
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-26)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 7000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5411.0 lumens
Efficiency: N/A
Efficacy: 73.7 lumens/watt
Spacing Criteria (0/90/45): 1.07 / 1.07 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 73.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365150

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82

Luminous Intensity Polar Plot

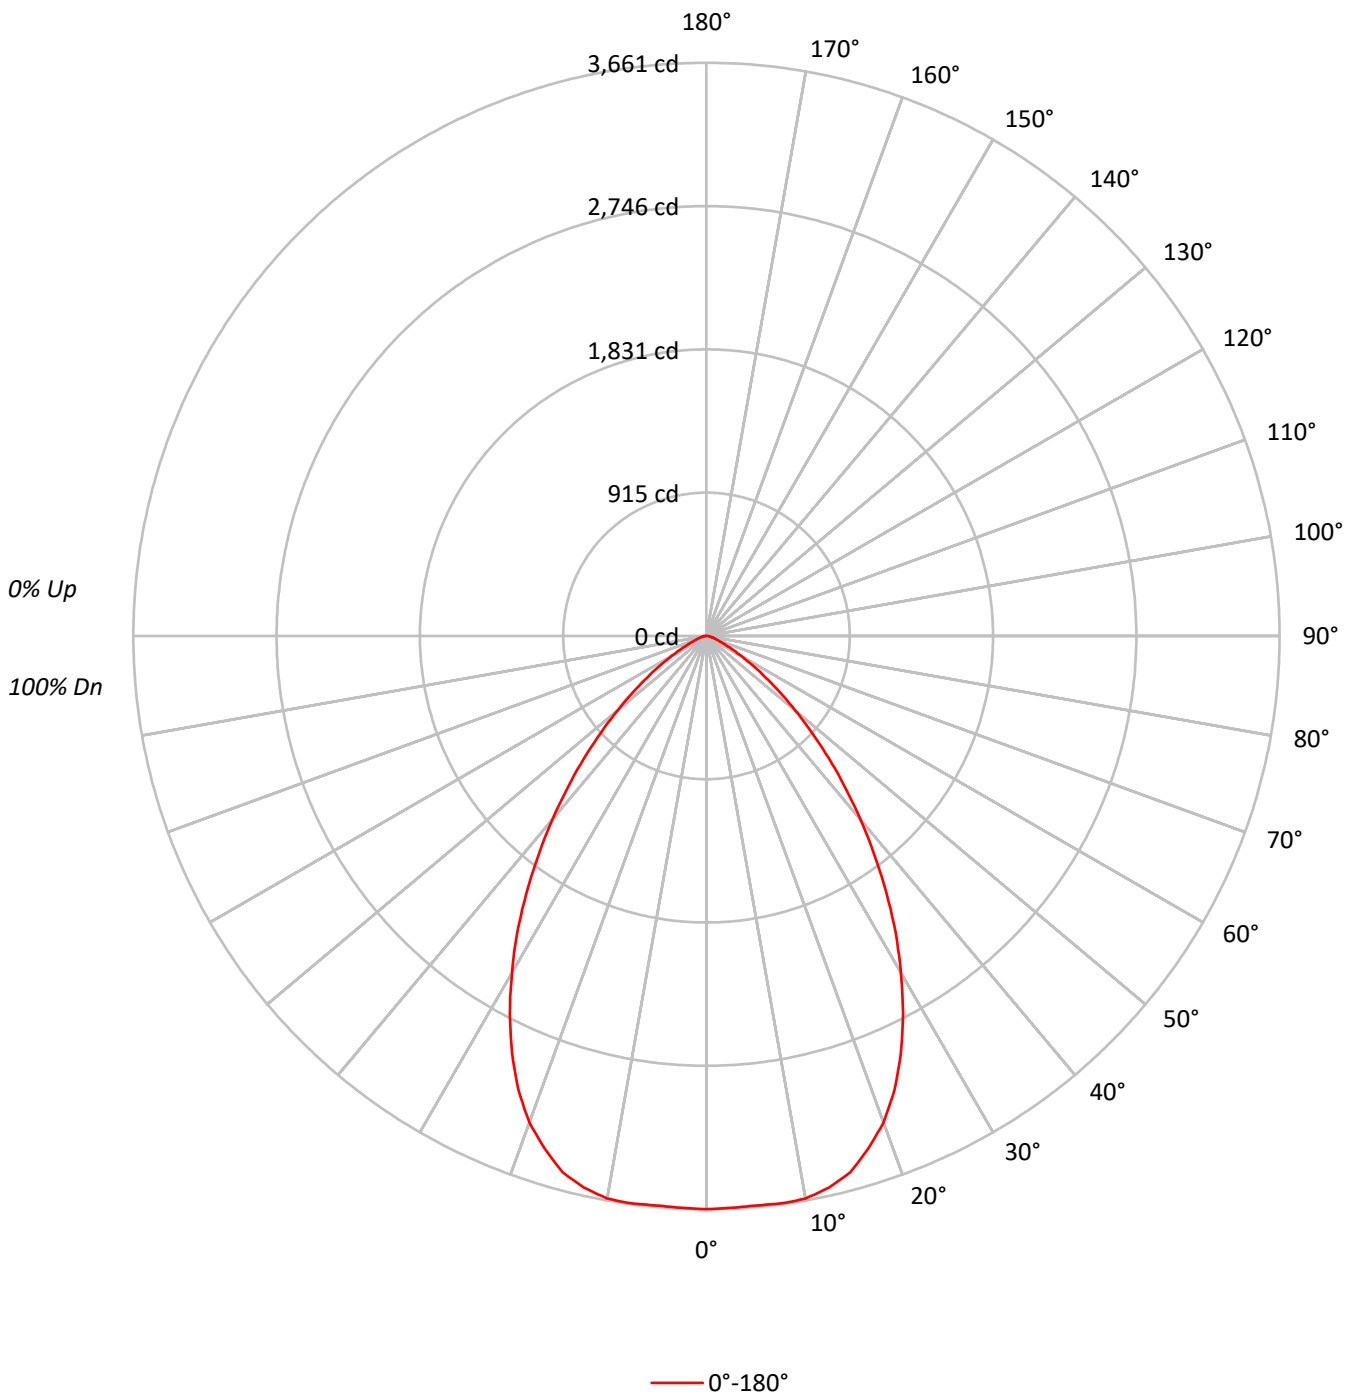



TEST NUMBER: P365150

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	69	65	61	60
6	81	70	63	57	79	69	62	57	67	61	57	66	60	56	64	60	56	54
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	43	42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	262156
5°	262446
10°	265298
15°	262961
20°	251991
25°	232113
30°	205432
35°	175178
40°	143093
45°	111872
50°	82509
55°	57211
60°	36546
65°	22245
70°	15031
75°	11647
80°	10226
85°	14213



TEST NUMBER: P365150

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	348.8	6.4
10°-20°	992.0	18.3
20°-30°	1341.8	24.8
30°-40°	1248.1	23.1
40°-50°	855.2	15.8
50°-60°	421.5	7.8
60°-70°	140.8	2.6
70°-80°	46.7	0.9
80°-90°	16.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2682.5	49.6
0°-40°	3930.7	72.6
0°-60°	5207.3	96.2
0°-90°	5411.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5411.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3661	
5°	3651	349
15°	3547	992
25°	2938	1342
35°	2004	1248
45°	1105	855
55°	458	421
65°	131	141
75°	42	47
85°	17	16
90°	0	



TEST NUMBER: P365150

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	3661.3
2.5°	3656.4
5°	3651.4
7.5°	3656.4
10°	3648.9
12.5°	3609.3
15°	3547.4
17.5°	3433.4
20°	3307.1
22.5°	3138.6
25°	2938.0
27.5°	2720.0
30°	2484.7
32.5°	2249.3
35°	2004.1
37.5°	1761.3
40°	1530.9
42.5°	1308.0
45°	1104.8
47.5°	911.6
50°	740.7
52.5°	592.1
55°	458.3
57.5°	349.3
60°	255.2
62.5°	183.3
65°	131.3
67.5°	94.1
70°	71.8
72.5°	54.5
75°	42.1
77.5°	32.2
80°	24.8
82.5°	19.8
85°	17.3
87.5°	9.9
90°	0.0

(END OF REPORT)