

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365152

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365152  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.187", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5563.0 lumens  
Efficiency: N/A  
Efficacy: 75.8 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365152

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85

### Luminous Intensity Polar Plot

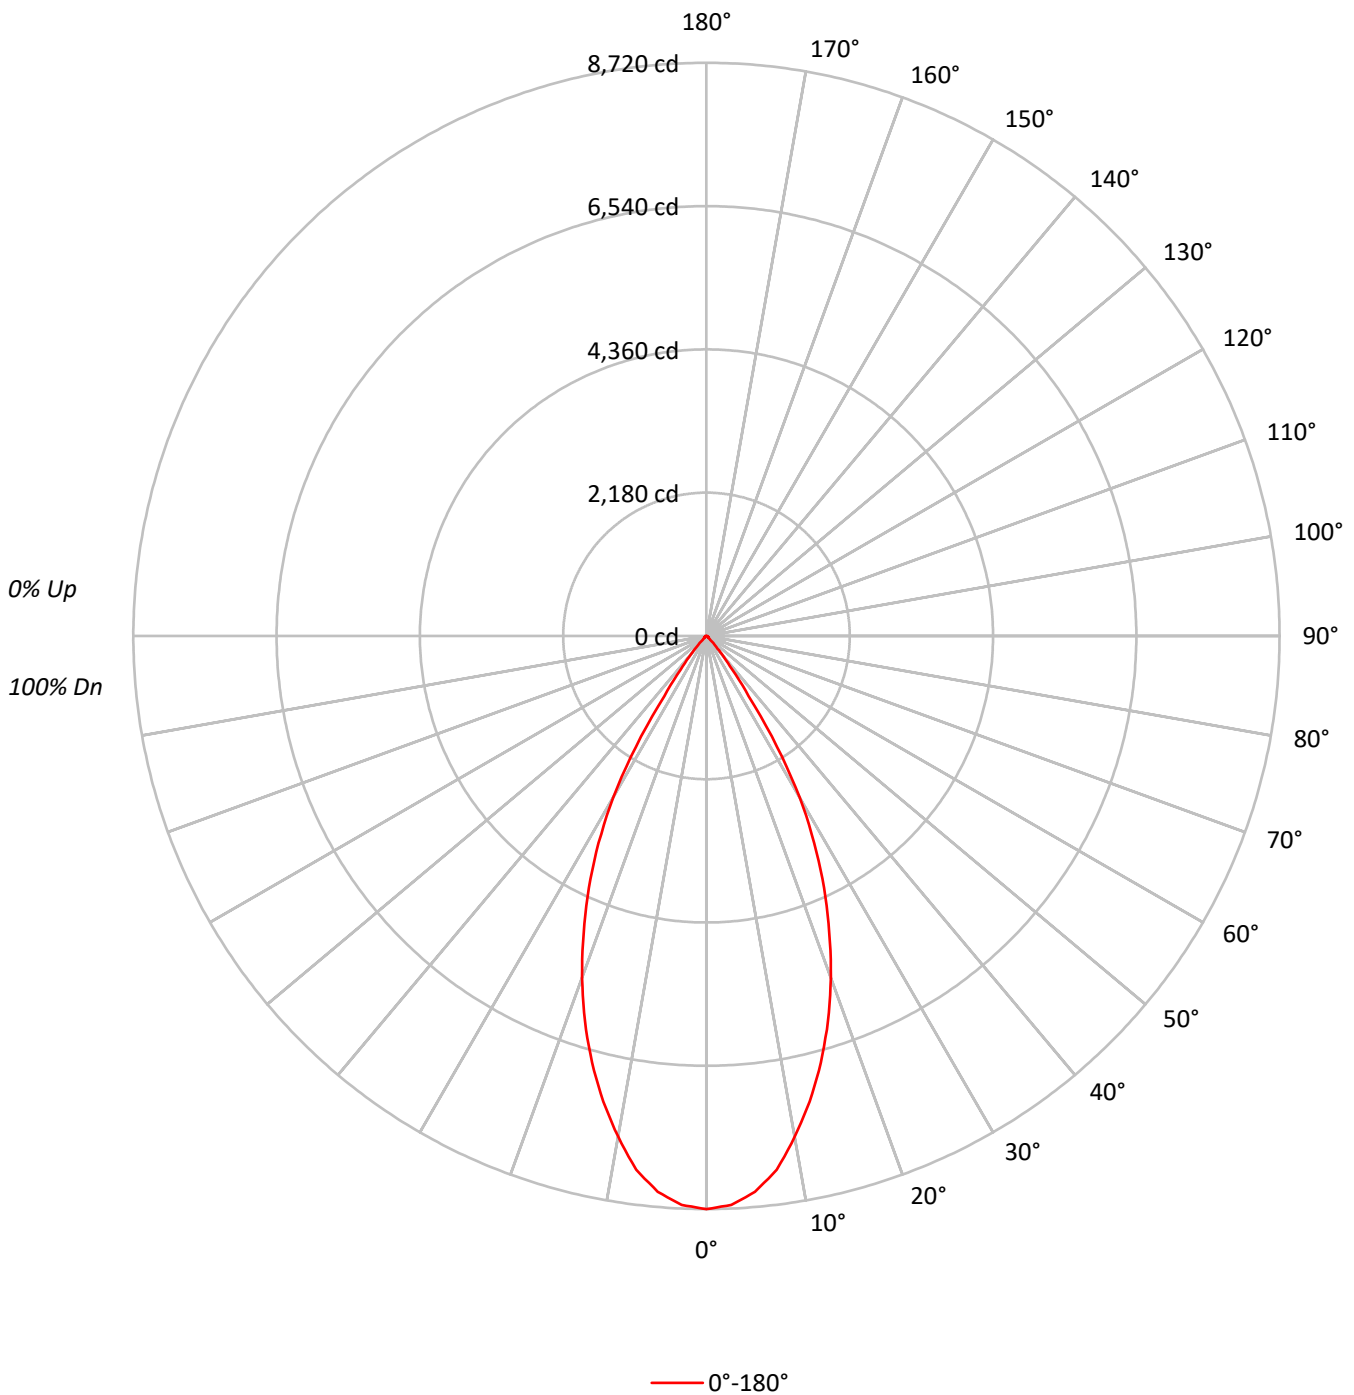



TEST NUMBER: P365152

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	624375
5°	610150
10°	562493
15°	498197
20°	421789
25°	334163
30°	234832
35°	97803
40°	33556
45°	8962
50°	4935
55°	4606
60°	4225
65°	4168
70°	4124
75°	4758
80°	6103
85°	10105



TEST NUMBER: P365152

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	786.7	14.1
10°-20°	1864.5	33.5
20°-30°	1914.1	34.4
30°-40°	810.5	14.6
40°-50°	99.7	1.8
50°-60°	33.0	0.6
60°-70°	24.4	0.4
70°-80°	18.9	0.3
80°-90°	11.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4565.3	82.1
0°-40°	5375.8	96.6
0°-60°	5508.4	99.0
0°-90°	5563.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5563.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8720	
5°	8489	787
15°	6721	1865
25°	4230	1914
35°	1119	810
45°	88	100
55°	37	33
65°	25	24
75°	17	19
85°	12	11
90°	0	



TEST NUMBER: P365152

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-LI-BTR85

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8720.1
2.5°	8663.6
5°	8489.0
7.5°	8188.9
10°	7736.5
12.5°	7254.5
15°	6720.8
17.5°	6147.9
20°	5535.5
22.5°	4883.9
25°	4229.7
27.5°	3553.5
30°	2840.3
32.5°	2001.7
35°	1118.9
37.5°	641.8
40°	359.0
42.5°	189.4
45°	88.5
47.5°	51.6
50°	44.3
52.5°	39.3
55°	36.9
57.5°	34.4
60°	29.5
62.5°	27.1
65°	24.6
67.5°	22.1
70°	19.7
72.5°	19.7
75°	17.2
77.5°	17.2
80°	14.8
82.5°	14.8
85°	12.3
87.5°	7.4
90°	0.0

(END OF REPORT)