

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365870

Luminaire Tested: **FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365870  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 7000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3999.0 lumens  
Efficiency: N/A  
Efficacy: 54.5 lumens/watt  
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 73.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365870

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82

### Luminous Intensity Polar Plot

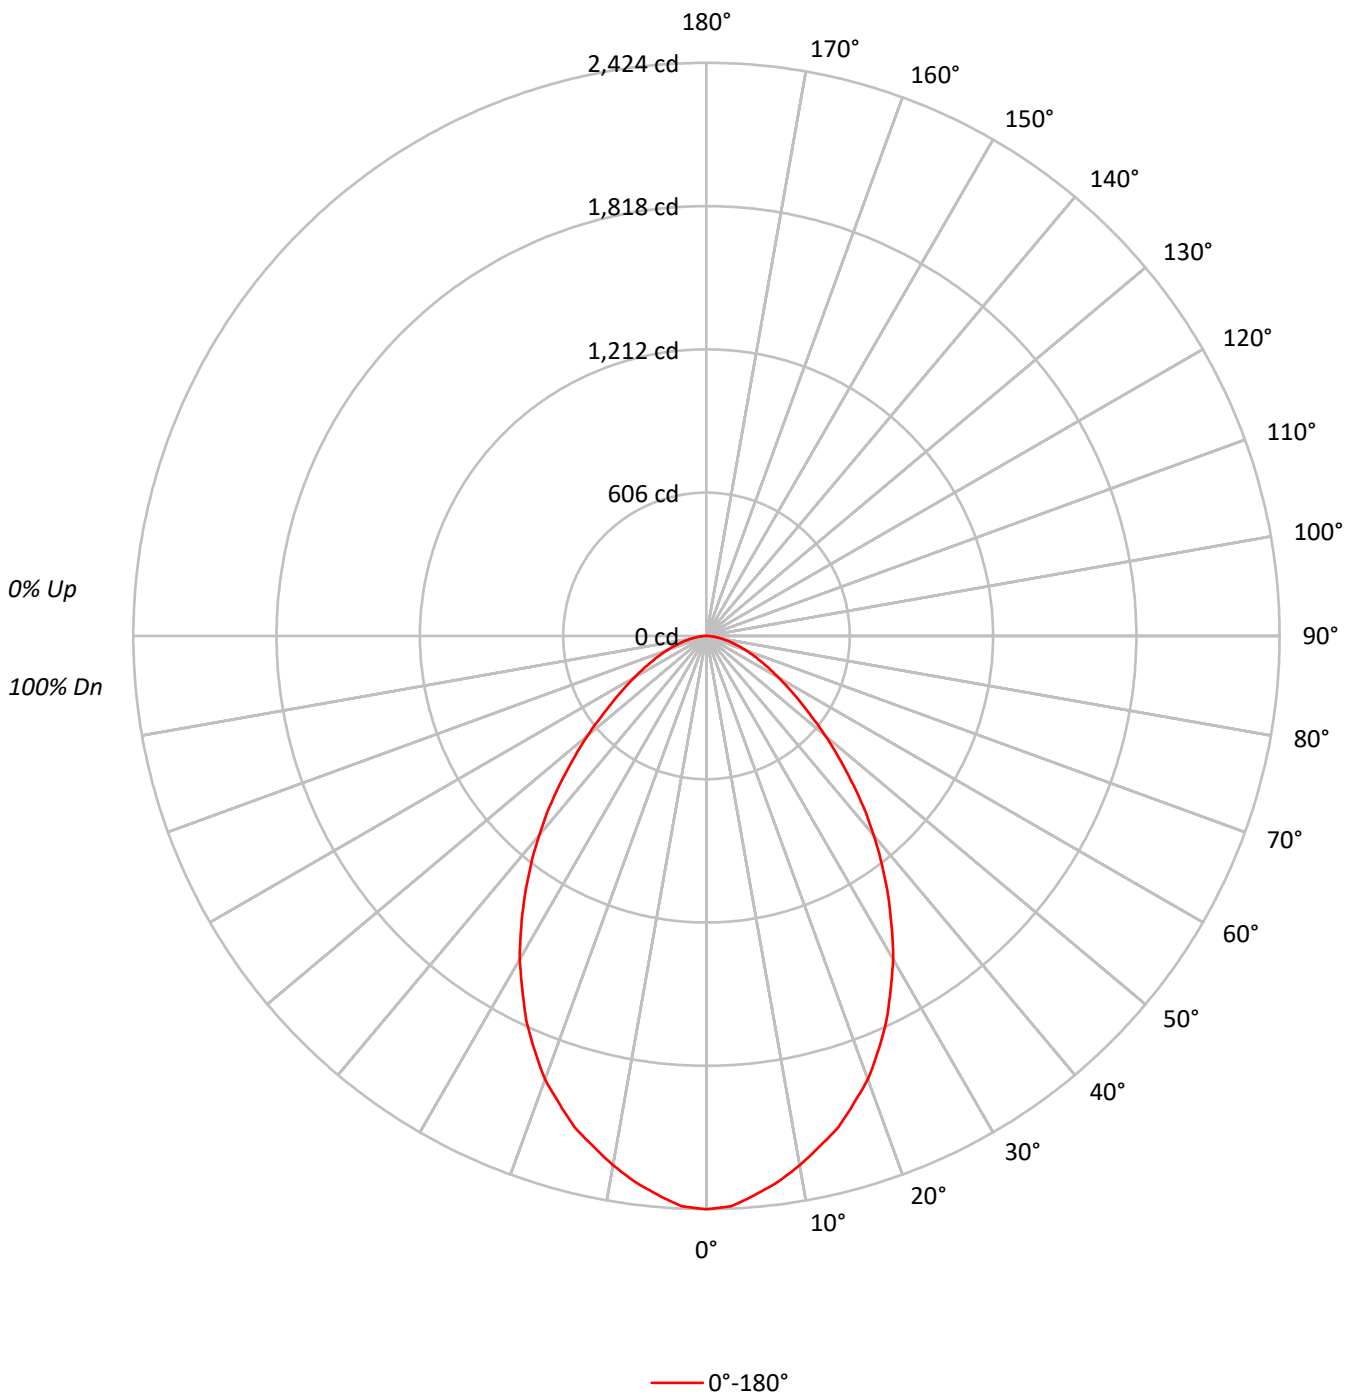



TEST NUMBER: P365870

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72	79	75	71	77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64	72	67	63	70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57	66	61	56	64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51	61	55	50	59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46	55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38	48	42	38	47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35	45	39	35	44	39	35	34

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	173592
5°	170510
10°	165276
15°	159501
20°	152051
25°	142183
30°	130558
35°	117007
40°	102873
45°	87600
50°	73174
55°	60033
60°	50408
65°	42847
70°	37369
75°	31538
80°	25565
85°	20374



TEST NUMBER: P365870

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	223.4	5.6
10°-20°	603.3	15.1
20°-30°	824.2	20.6
30°-40°	835.3	20.9
40°-50°	669.8	16.7
50°-60°	436.4	10.9
60°-70°	254.8	6.4
70°-80°	122.5	3.1
80°-90°	29.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1650.9	41.3
0°-40°	2486.2	62.2
0°-60°	3592.3	89.8
0°-90°	3999.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3999.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2424	
5°	2372	223
15°	2152	603
25°	1800	824
35°	1339	835
45°	865	670
55°	481	436
65°	253	255
75°	114	122
85°	25	29
90°	0	



TEST NUMBER: P365870

CATALOG NUMBER: FLD6BX70D010TE-FEU6B67-8050-F6LBXVM1-MW-BTR82

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2424.4
2.5°	2414.5
5°	2372.3
7.5°	2327.7
10°	2273.2
12.5°	2211.2
15°	2151.7
17.5°	2072.4
20°	1995.5
22.5°	1898.9
25°	1799.7
27.5°	1685.7
30°	1579.1
32.5°	1457.6
35°	1338.6
37.5°	1219.6
40°	1100.6
42.5°	984.1
45°	865.1
47.5°	756.1
50°	656.9
52.5°	560.2
55°	480.9
57.5°	411.5
60°	352.0
62.5°	300.0
65°	252.9
67.5°	213.2
70°	178.5
72.5°	143.8
75°	114.0
77.5°	86.8
80°	62.0
82.5°	42.1
85°	24.8
87.5°	9.9
90°	0.0

(END OF REPORT)