

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P575448

Luminaire Tested: **FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P575448
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203666)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 6LBNH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8216.1 lumens
Efficiency: N/A
Efficacy: 57.7 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 142.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P575448

CATALOG NUMBER: FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H

Luminous Intensity Polar Plot

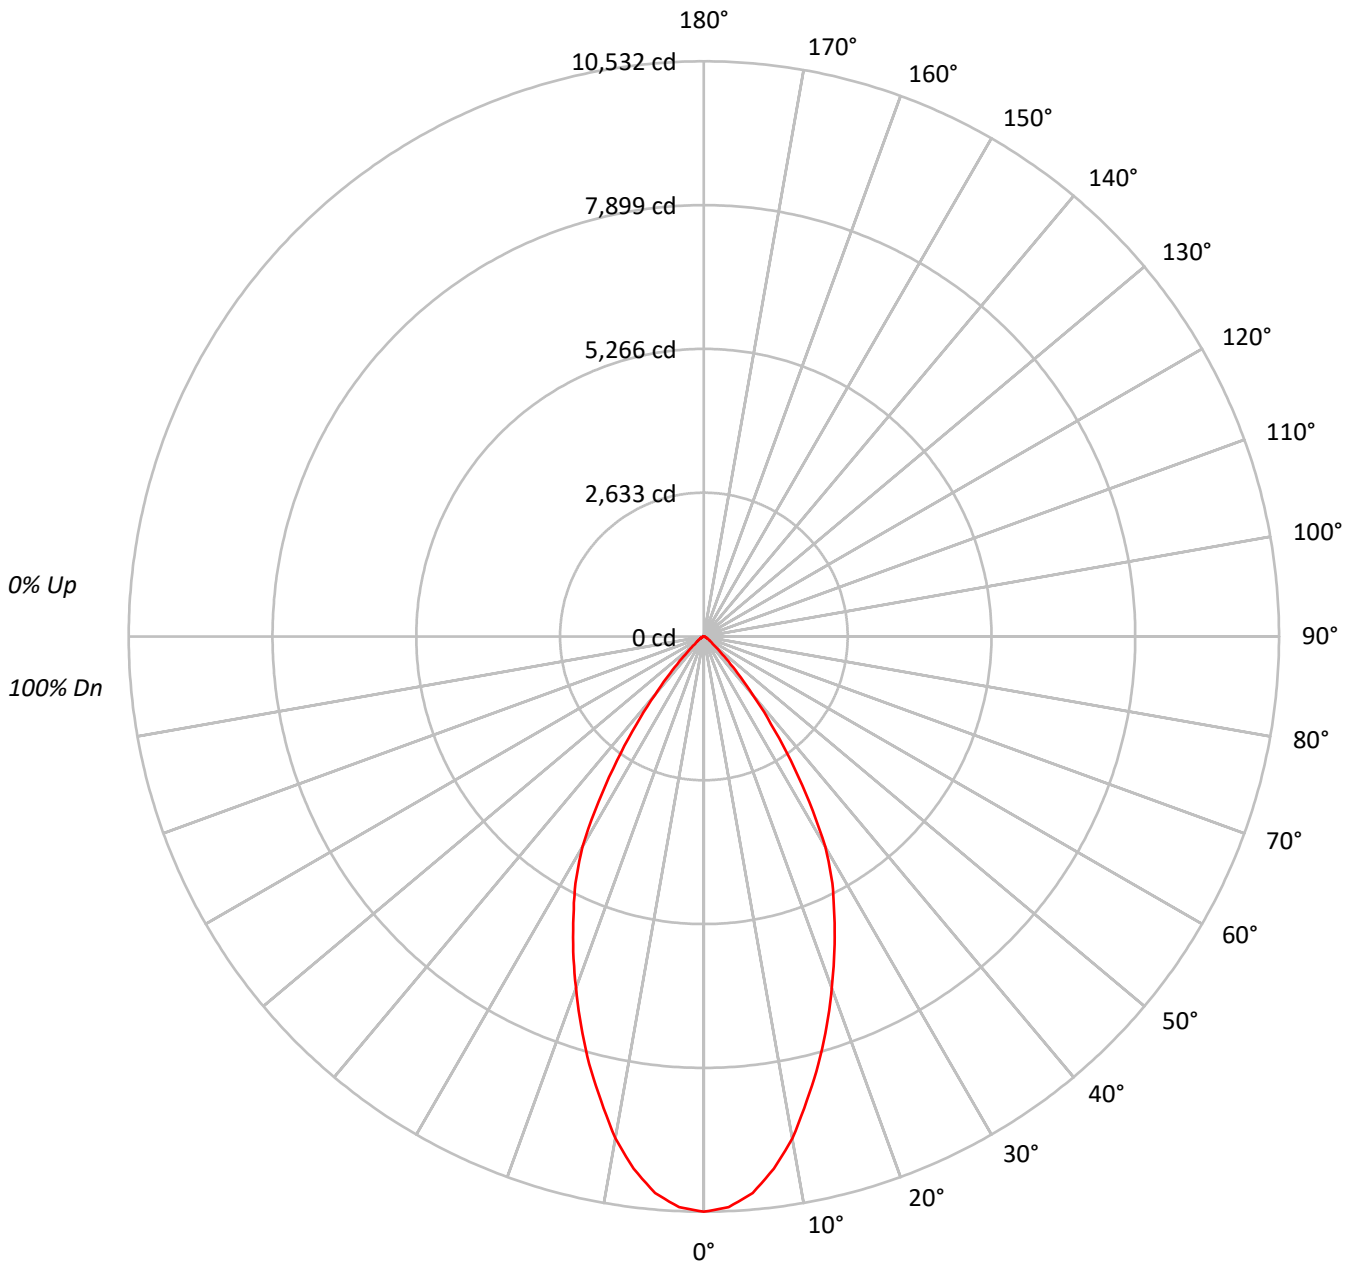



TEST NUMBER: P575448

CATALOG NUMBER: FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	577372
5°	563079
10°	519563
15°	459991
20°	399402
25°	341627
30°	281651
35°	185477
40°	99708
45°	44144
50°	17901
55°	12912
60°	8201
65°	5863
70°	4825
75°	3198
80°	4767
85°	0



TEST NUMBER: P575448

CATALOG NUMBER: FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	947.1	11.5
10°-20°	2258.6	27.5
20°-30°	2587.5	31.5
30°-40°	1738.5	21.2
40°-50°	496.7	6.0
50°-60°	121.6	1.5
60°-70°	46.2	0.6
70°-80°	17.9	0.2
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5793.1	70.5
0°-40°	7531.6	91.7
0°-60°	8149.9	99.2
0°-90°	8216.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8216.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10532	
5°	10232	947
15°	8105	2259
25°	5648	2587
35°	2772	1738
45°	569	497
55°	135	122
65°	45	46
75°	15	18
85°	0	2
90°	0	



TEST NUMBER: P575448

CATALOG NUMBER: FLD6C-120-D010 FEU6C-X-90-35 F6X-N-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	10532.1
2.5°	10457.3
5°	10232.3
7.5°	9827.6
10°	9333.6
12.5°	8704.0
15°	8105.0
17.5°	7475.9
20°	6846.3
22.5°	6247.4
25°	5647.9
27.5°	5093.6
30°	4449.4
32.5°	3595.4
35°	2771.5
37.5°	2022.4
40°	1393.3
42.5°	913.8
45°	569.4
47.5°	344.4
50°	209.9
52.5°	164.7
55°	135.1
57.5°	104.9
60°	74.8
62.5°	59.7
65°	45.2
67.5°	30.1
70°	30.1
72.5°	15.1
75°	15.1
77.5°	15.1
80°	15.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)