

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P573838

Luminaire Tested: **FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P573838
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 6LBNLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 257.0 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 3.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P573838

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI

Luminous Intensity Polar Plot

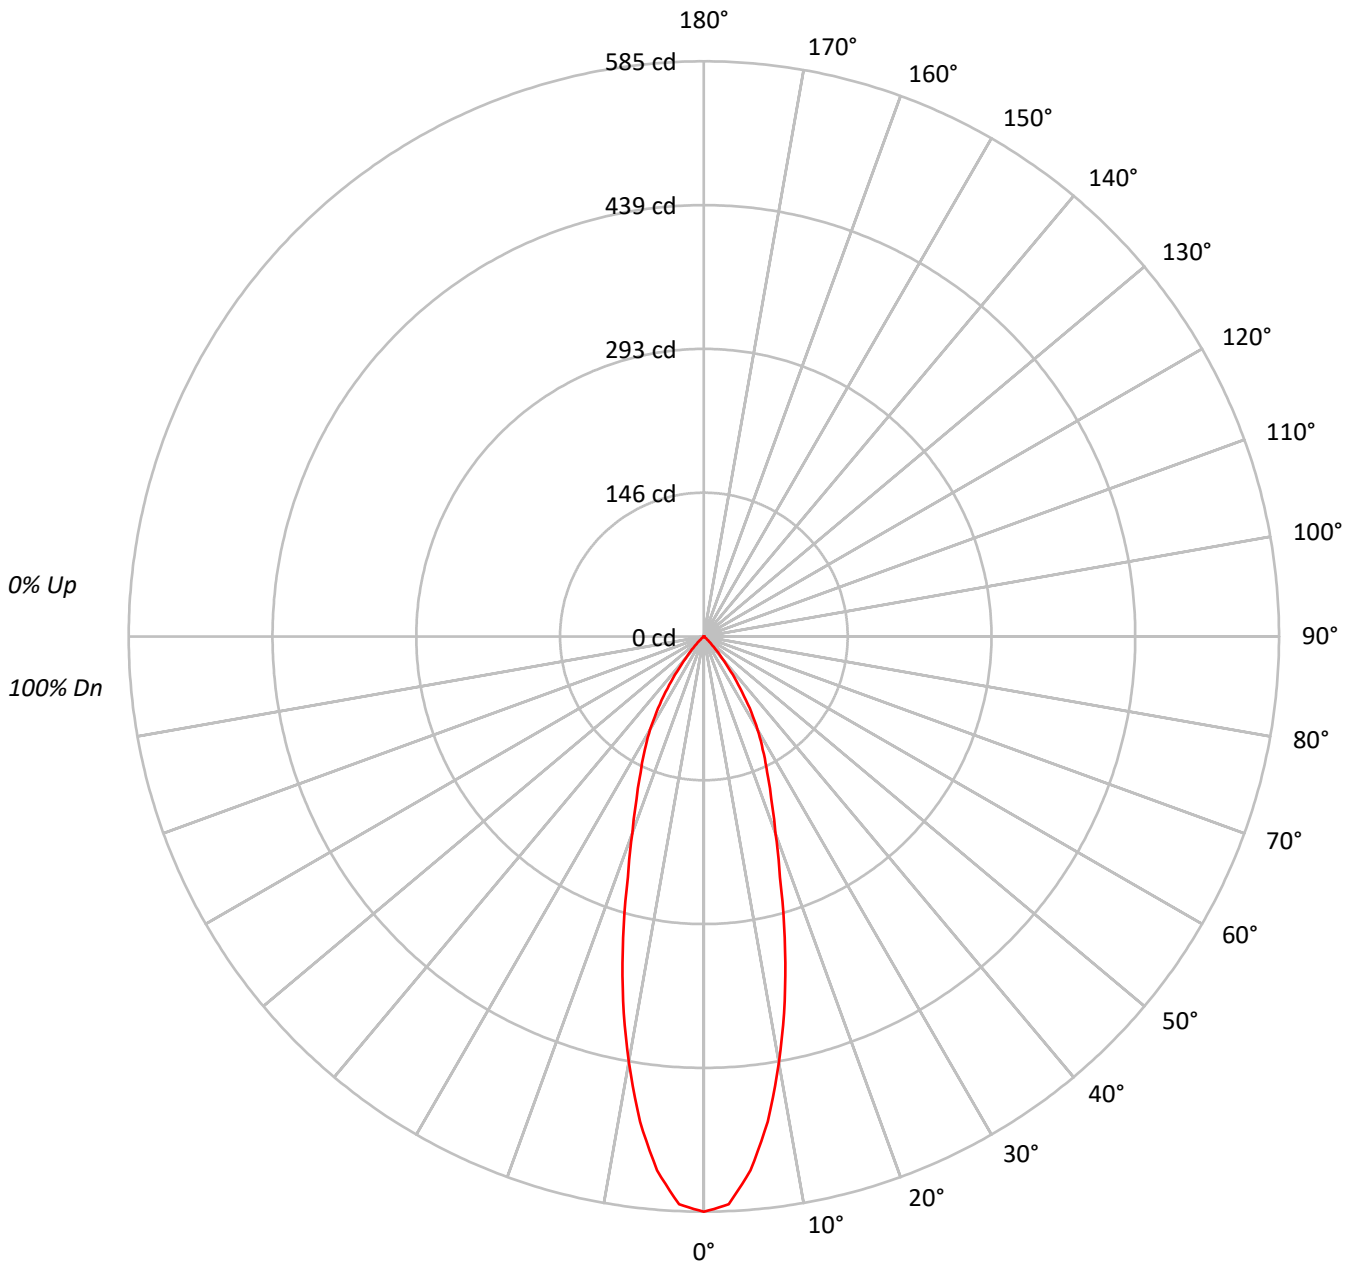



TEST NUMBER: P573838

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95			
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89			
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85			
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80			
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76			
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72			
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68			
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65			
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62			
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32075
5°	29997
10°	24465
15°	18002
20°	12409
25°	9212
30°	6919
35°	4317
40°	2097
45°	721
50°	94
55°	67
60°	44
65°	52
70°	64
75°	0
80°	0
85°	0



TEST NUMBER: P573838

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.6	18.9
10°-20°	87.3	34.0
20°-30°	70.6	27.5
30°-40°	40.7	15.8
40°-50°	8.6	3.3
50°-60°	0.7	0.3
60°-70°	0.4	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	206.6	80.4
0°-40°	247.2	96.2
0°-60°	256.6	99.8
0°-90°	257.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	257.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	585	
5°	545	49
15°	317	87
25°	152	71
35°	64	41
45°	9	9
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P573838

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-27 F6X-N-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	585.1
2.5°	578.1
5°	545.1
7.5°	497.7
10°	439.5
12.5°	379.8
15°	317.2
17.5°	256.8
20°	212.7
22.5°	179.0
25°	152.3
27.5°	129.7
30°	109.3
32.5°	86.7
35°	64.5
37.5°	44.8
40°	29.3
42.5°	17.8
45°	9.3
47.5°	3.7
50°	1.1
52.5°	1.1
55°	0.7
57.5°	0.7
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)