

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P574088

Luminaire Tested: **FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P574088
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 5000K, 90 CRI LEDS, 6LBWH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 308.0 lumens
Efficiency: N/A
Efficacy: 88.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 3.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P574088

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H

Luminous Intensity Polar Plot

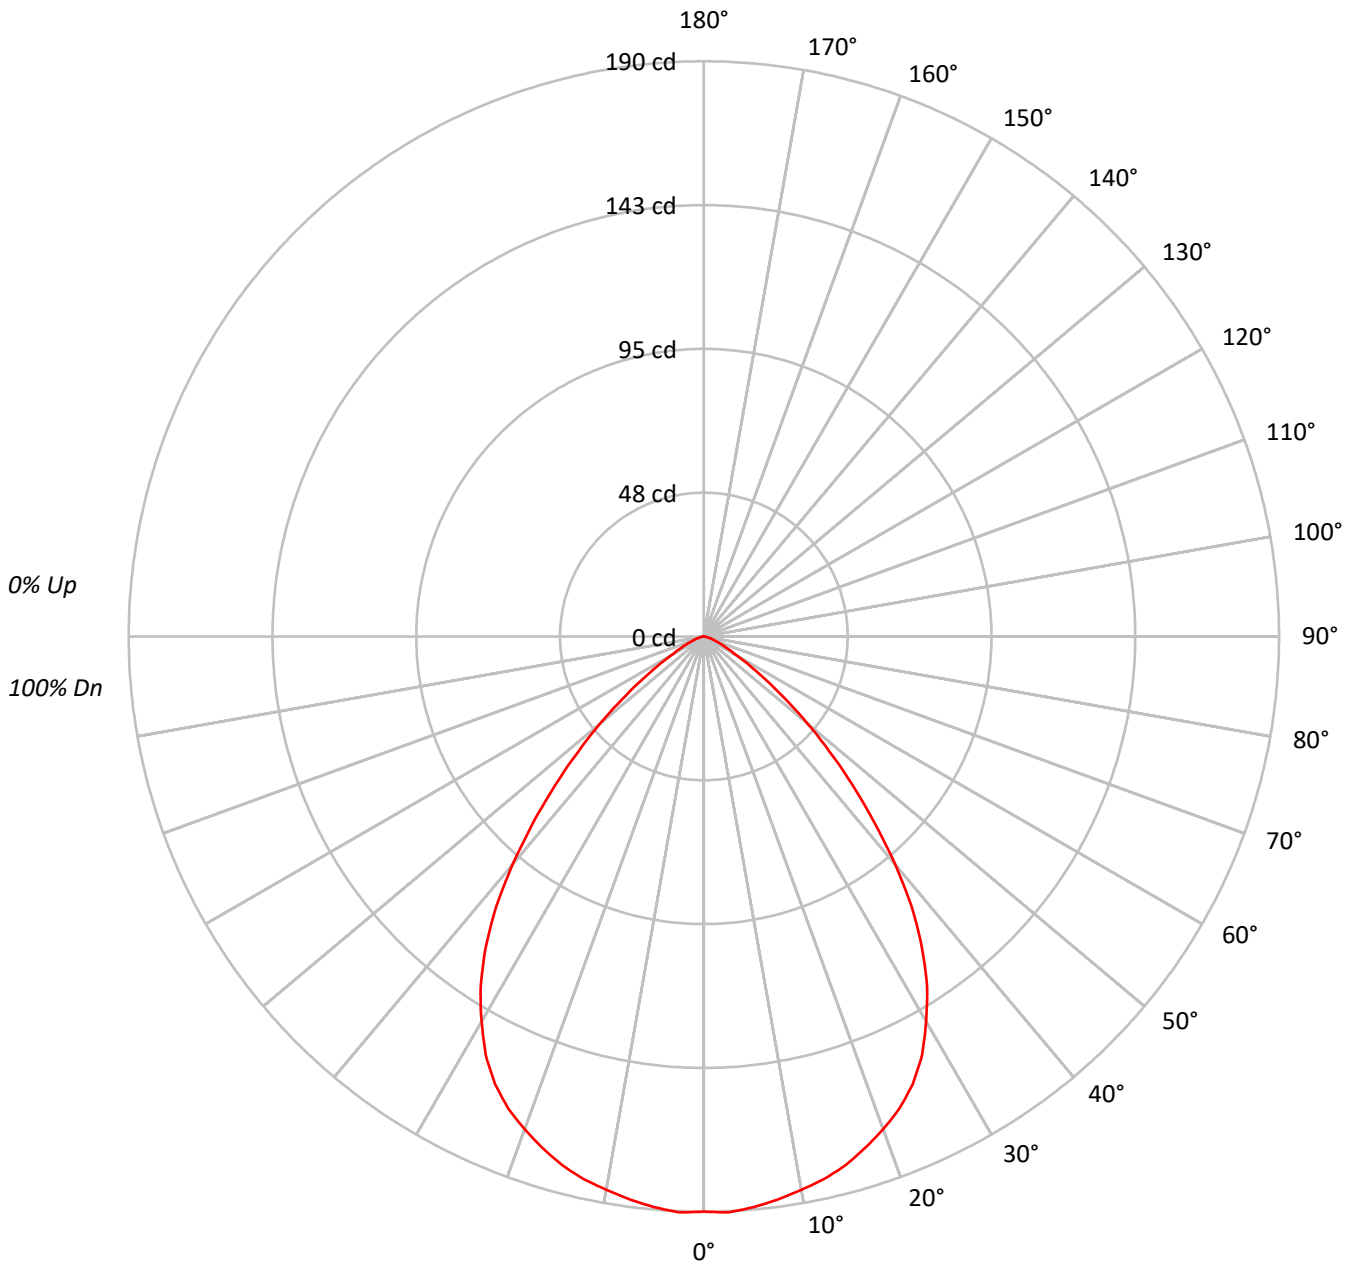



TEST NUMBER: P574088

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	10416
5°	10412
10°	10332
15°	10261
20°	10104
25°	9872
30°	9299
35°	8412
40°	7027
45°	5380
50°	3812
55°	2399
60°	1360
65°	882
70°	577
75°	424
80°	253
85°	252



TEST NUMBER: P574088

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.9	5.8
10°-20°	50.9	16.5
20°-30°	74.6	24.2
30°-40°	77.7	25.2
40°-50°	53.7	17.4
50°-60°	23.4	7.6
60°-70°	7.2	2.3
70°-80°	2.2	0.7
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	143.5	46.6
0°-40°	221.2	71.8
0°-60°	298.3	96.9
0°-90°	308.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	308.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	190	
5°	189	18
15°	181	51
25°	163	75
35°	126	78
45°	69	54
55°	25	23
65°	7	7
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P574088

CATALOG NUMBER: FLD6C-02-D010 FEU6C-X-90-50 F6X-W-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	190.0
2.5°	190.4
5°	189.2
7.5°	187.6
10°	185.6
12.5°	183.6
15°	180.8
17.5°	177.2
20°	173.2
22.5°	168.8
25°	163.2
27.5°	156.0
30°	146.9
32.5°	137.3
35°	125.7
37.5°	113.0
40°	98.2
42.5°	83.4
45°	69.4
47.5°	56.3
50°	44.7
52.5°	33.9
55°	25.1
57.5°	18.0
60°	12.4
62.5°	9.2
65°	6.8
67.5°	5.2
70°	3.6
72.5°	2.8
75°	2.0
77.5°	1.2
80°	0.8
82.5°	0.4
85°	0.4
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)