

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P576278

Luminaire Tested: **FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P576278  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI  
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 6LBMLI TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2287.9 lumens  
Efficiency: N/A  
Efficacy: 72.6 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 31.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P576278

CATALOG NUMBER: FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI

### Luminous Intensity Polar Plot

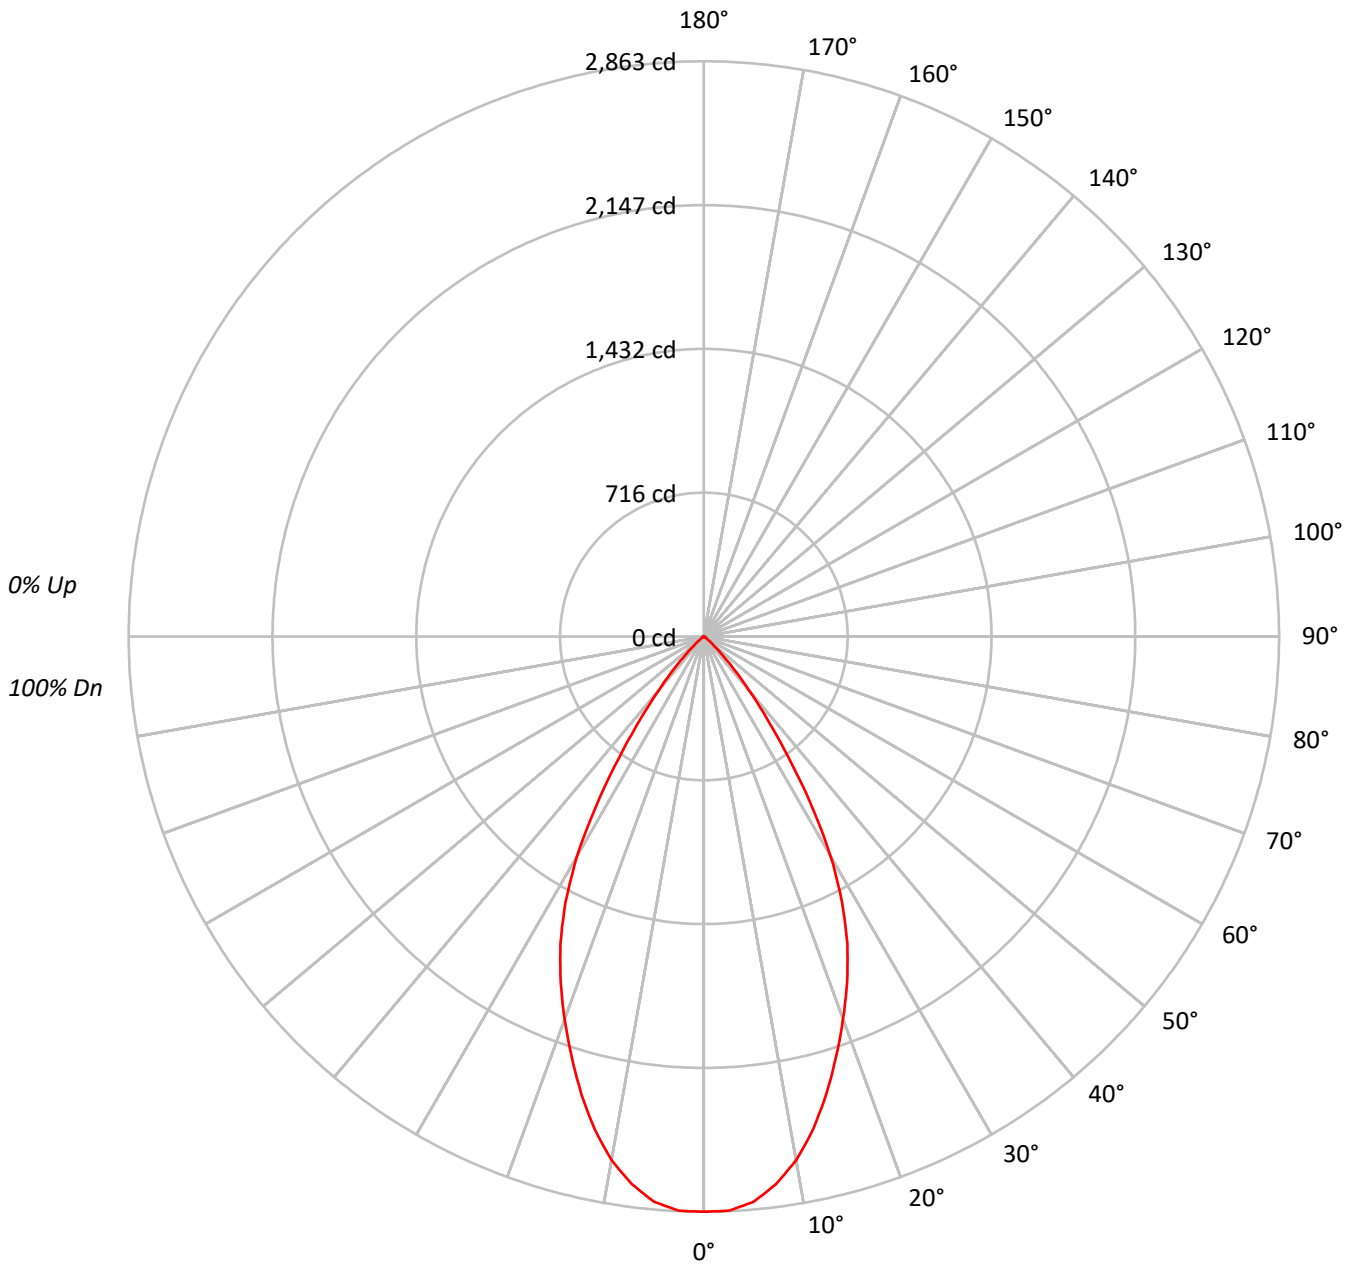



TEST NUMBER: P576278

CATALOG NUMBER: FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	156967
5°	155475
10°	147325
15°	133758
20°	118194
25°	102181
30°	79873
35°	48981
40°	25140
45°	9986
50°	3241
55°	1118
60°	954
65°	765
70°	465
75°	614
80°	0
85°	0



TEST NUMBER: P576278

CATALOG NUMBER: FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	263.8	11.5
10°-20°	656.7	28.7
20°-30°	763.4	33.4
30°-40°	467.5	20.4
40°-50°	116.1	5.1
50°-60°	13.5	0.6
60°-70°	5.1	0.2
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1683.8	73.6
0°-40°	2151.3	94.0
0°-60°	2280.9	99.7
0°-90°	2287.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2287.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2863	
5°	2825	264
15°	2357	657
25°	1689	763
35°	732	467
45°	129	116
55°	12	14
65°	6	5
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P576278

CATALOG NUMBER: FLD6C-25-D010 FEU6C-X-90-30 F6X-M-X-LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2863.3
2.5°	2860.4
5°	2825.3
7.5°	2749.1
10°	2646.6
12.5°	2512.0
15°	2356.8
17.5°	2189.9
20°	2026.0
22.5°	1862.0
25°	1689.3
27.5°	1490.2
30°	1261.8
32.5°	995.4
35°	731.9
37.5°	515.3
40°	351.3
42.5°	219.5
45°	128.8
47.5°	73.2
50°	38.0
52.5°	17.6
55°	11.7
57.5°	8.7
60°	8.7
62.5°	5.9
65°	5.9
67.5°	2.9
70°	2.9
72.5°	2.9
75°	2.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)