

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P576518

Luminaire Tested: **FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P576518  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI  
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 6LBMLI TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2584.0 lumens  
Efficiency: N/A  
Efficacy: 81.8 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 31.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P576518

CATALOG NUMBER: FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI

### Luminous Intensity Polar Plot

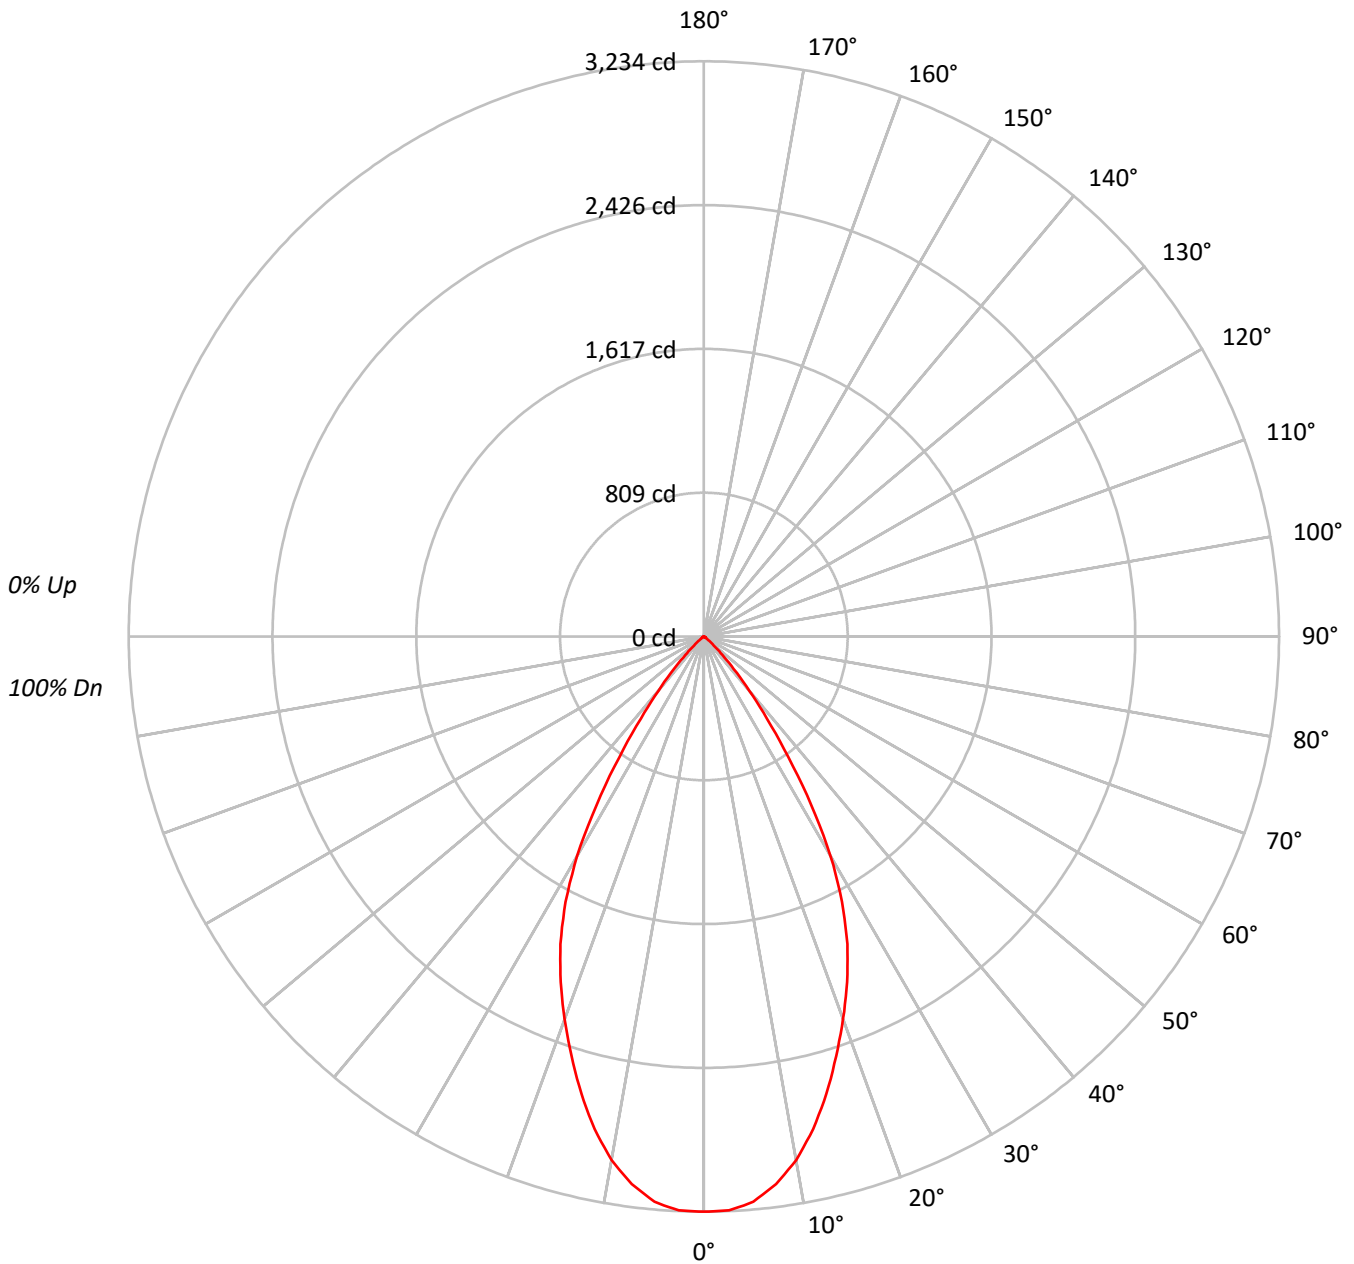



TEST NUMBER: P576518

CATALOG NUMBER: FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94				94
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88				88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82				82
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76				76
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71				71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67				67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63				63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59				59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55				55
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52				52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	177277
5°	175588
10°	166385
15°	151062
20°	133484
25°	115404
30°	90210
35°	55319
40°	28396
45°	11280
50°	3667
55°	1262
60°	1085
65°	869
70°	529
75°	699
80°	0
85°	0



TEST NUMBER: P576518

CATALOG NUMBER: FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	297.9	11.5
10°-20°	741.7	28.7
20°-30°	862.1	33.4
30°-40°	527.9	20.4
40°-50°	131.1	5.1
50°-60°	15.3	0.6
60°-70°	5.7	0.2
70°-80°	2.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1901.7	73.6
0°-40°	2429.7	94.0
0°-60°	2576.1	99.7
0°-90°	2584.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2584.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3234	
5°	3191	298
15°	2662	742
25°	1908	862
35°	827	528
45°	146	131
55°	13	15
65°	7	6
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P576518

CATALOG NUMBER: FLD6C-30-D010 FEU6C-X-90-27 F6X-M-X-LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3233.8
2.5°	3230.4
5°	3190.8
7.5°	3104.8
10°	2989.0
12.5°	2837.0
15°	2661.7
17.5°	2473.3
20°	2288.1
22.5°	2102.9
25°	1907.9
27.5°	1683.0
30°	1425.1
32.5°	1124.2
35°	826.6
37.5°	581.9
40°	396.8
42.5°	247.9
45°	145.5
47.5°	82.7
50°	43.0
52.5°	19.9
55°	13.2
57.5°	9.9
60°	9.9
62.5°	6.7
65°	6.7
67.5°	3.3
70°	3.3
72.5°	3.3
75°	3.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)