

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P577458

Luminaire Tested: **FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P577458
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 6LBWLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4629.1 lumens
Efficiency: N/A
Efficacy: 93.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 49.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P577458

CATALOG NUMBER: FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI

Luminous Intensity Polar Plot

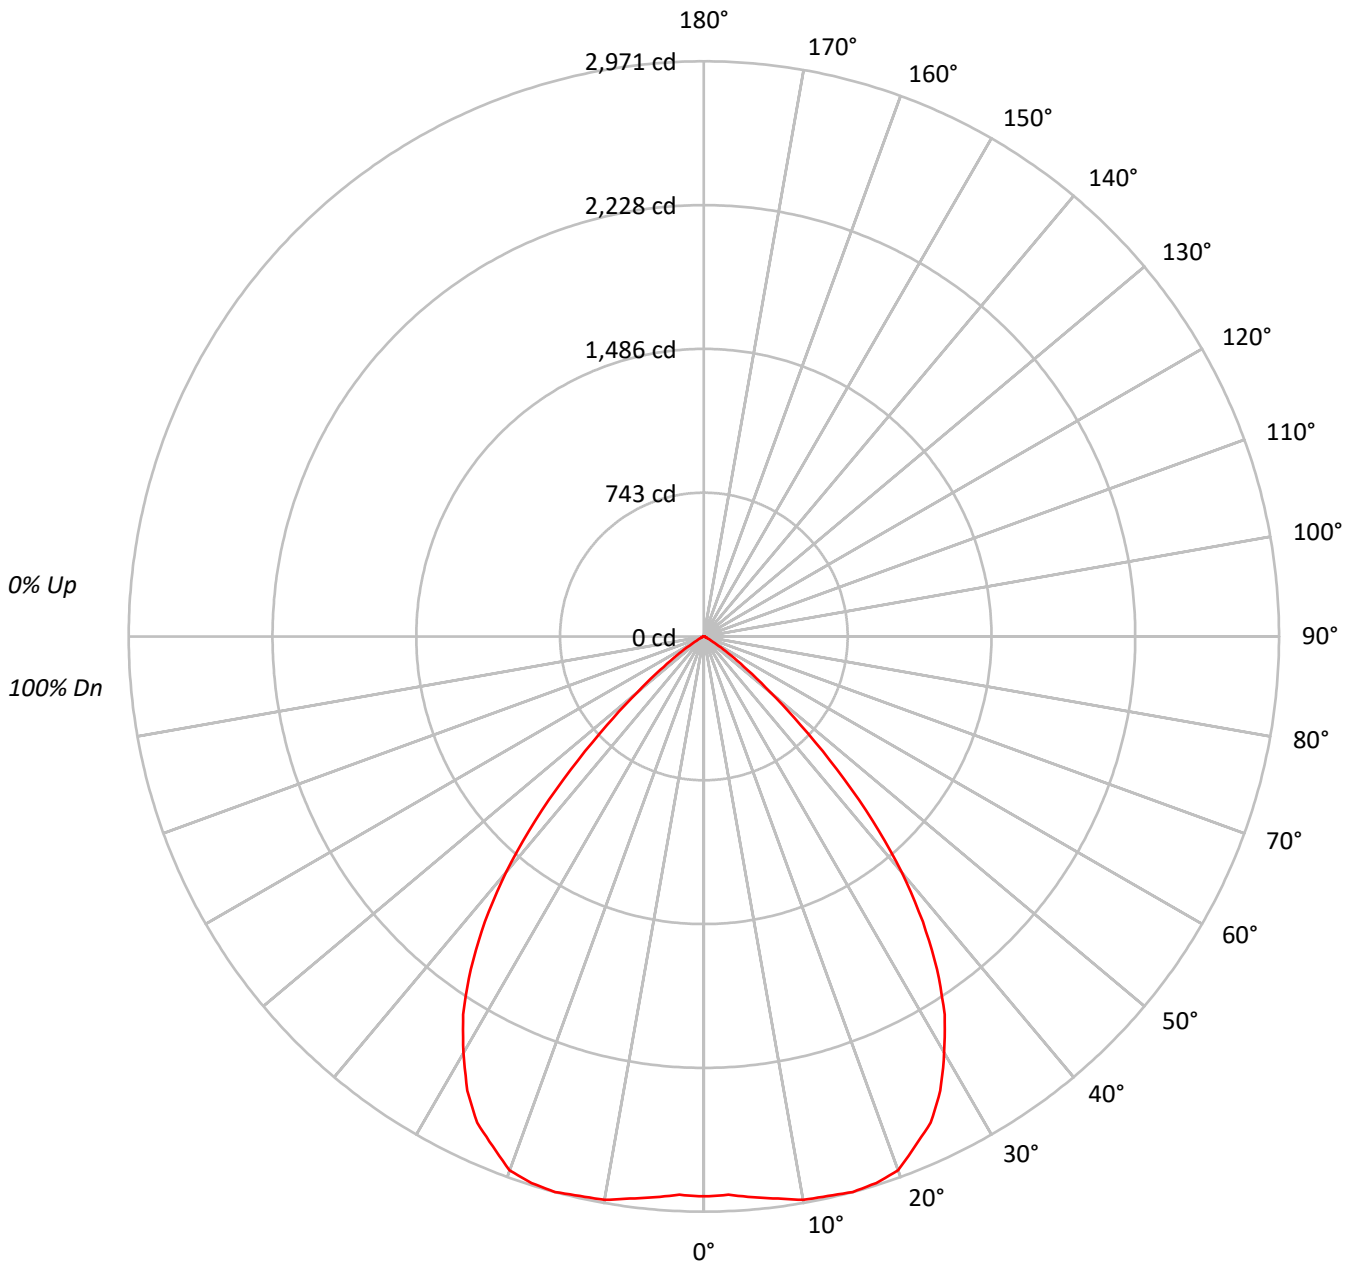



TEST NUMBER: P577458

CATALOG NUMBER: FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92				92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83				83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76				76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69				69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63				63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57				57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52				52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48				48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44				44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41				41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158534
5°	159998
10°	164476
15°	168593
20°	171153
25°	167617
30°	157144
35°	140498
40°	113799
45°	75279
50°	38046
55°	16057
60°	5175
65°	2037
70°	1699
75°	1123
80°	0
85°	0



TEST NUMBER: P577458

CATALOG NUMBER: FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	279.0	6.0
10°-20°	838.5	18.1
20°-30°	1264.0	27.3
30°-40°	1293.8	27.9
40°-50°	753.7	16.3
50°-60°	173.2	3.7
60°-70°	21.3	0.5
70°-80°	5.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2381.5	51.4
0°-40°	3675.3	79.4
0°-60°	4602.2	99.4
0°-90°	4629.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4629.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2892	
5°	2908	279
15°	2971	839
25°	2771	1264
35°	2099	1294
45°	971	754
55°	168	173
65°	16	21
75°	5	6
85°	0	0
90°	0	



TEST NUMBER: P577458

CATALOG NUMBER: FLD6C-45-D010 FEU6C-X-90-27 F6X-W-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2891.9
2.5°	2886.6
5°	2907.5
7.5°	2928.5
10°	2954.7
12.5°	2960.0
15°	2970.6
17.5°	2960.0
20°	2933.8
22.5°	2849.8
25°	2771.1
27.5°	2645.2
30°	2482.5
32.5°	2314.5
35°	2099.4
37.5°	1857.8
40°	1590.2
42.5°	1291.1
45°	971.0
47.5°	677.0
50°	446.1
52.5°	283.5
55°	168.0
57.5°	89.3
60°	47.2
62.5°	26.2
65°	15.7
67.5°	15.7
70°	10.6
72.5°	5.3
75°	5.3
77.5°	5.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)