

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P578048

Luminaire Tested: **FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P578048
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 6LBWH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5131.0 lumens
Efficiency: N/A
Efficacy: 80.3 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 63.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P578048

CATALOG NUMBER: FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H

Luminous Intensity Polar Plot

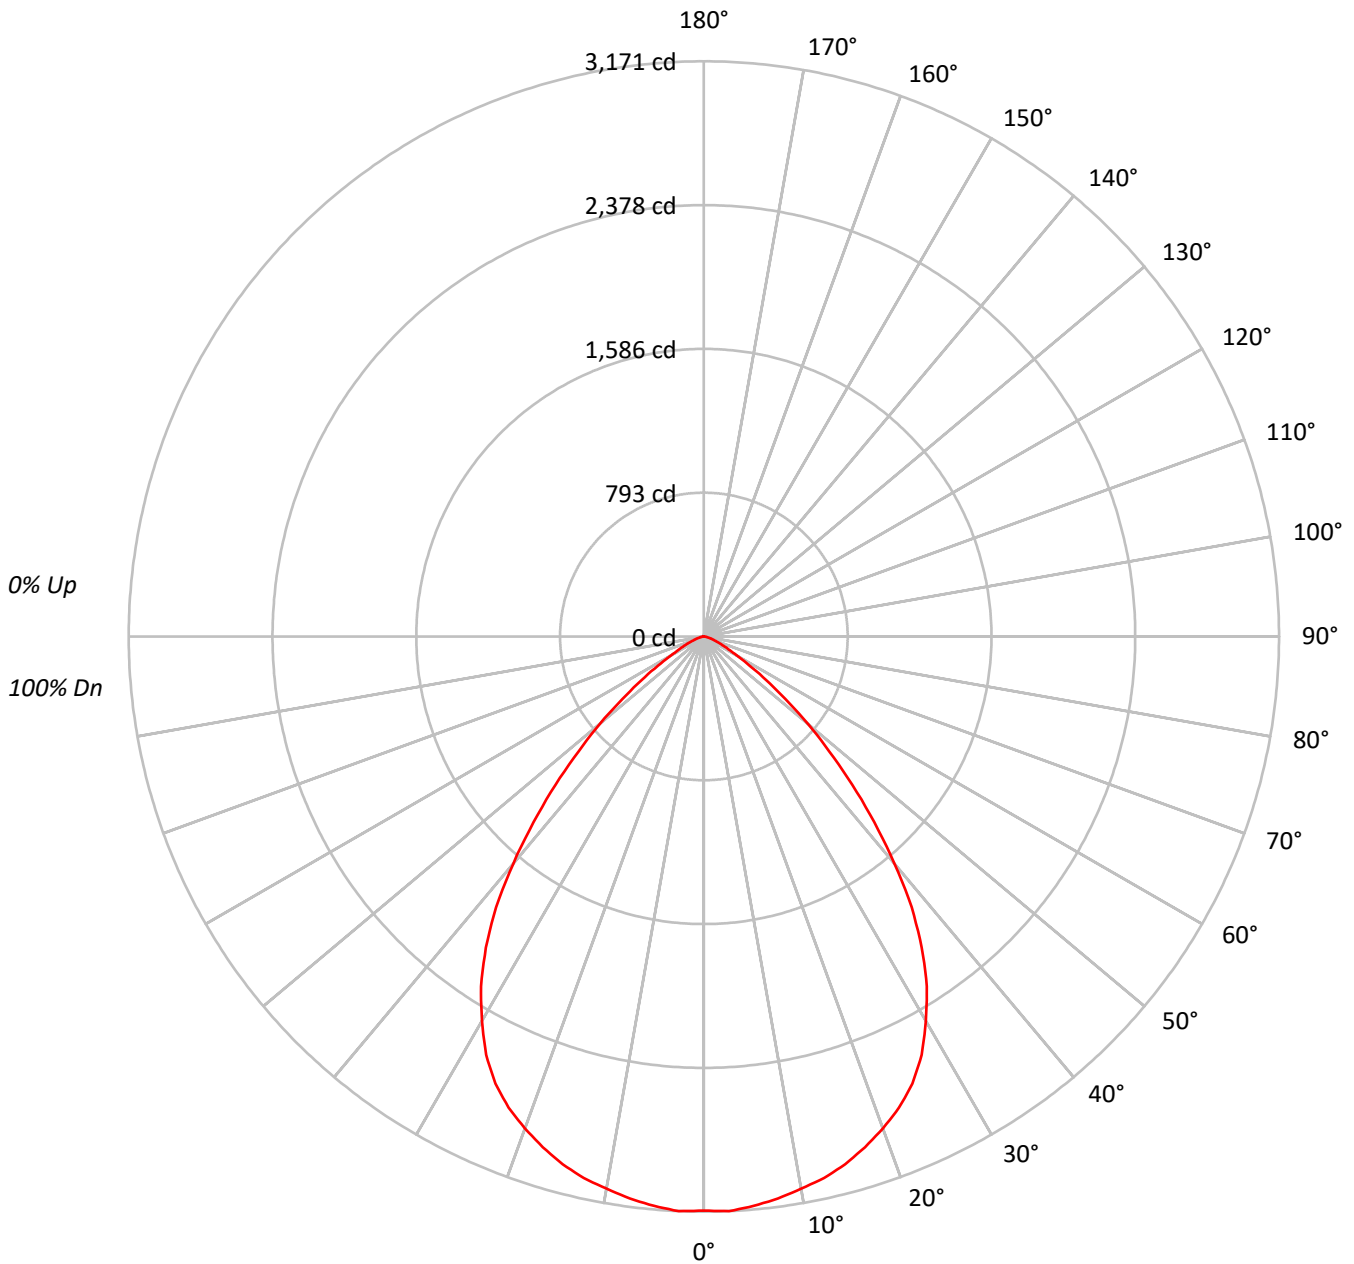



TEST NUMBER: P578048

CATALOG NUMBER: FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			65
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			59
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			53
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			49
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			41
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	173484
5°	173426
10°	172091
15°	170937
20°	168335
25°	164489
30°	154878
35°	140164
40°	117041
45°	89684
50°	63512
55°	40046
60°	22586
65°	14658
70°	9585
75°	7032
80°	4230
85°	4214



TEST NUMBER: P578048

CATALOG NUMBER: FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	298.9	5.8
10°-20°	848.1	16.5
20°-30°	1243.6	24.2
30°-40°	1294.3	25.2
40°-50°	895.4	17.5
50°-60°	389.9	7.6
60°-70°	119.6	2.3
70°-80°	35.8	0.7
80°-90°	5.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2390.6	46.6
0°-40°	3684.9	71.8
0°-60°	4970.2	96.9
0°-90°	5131.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5131.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3165	
5°	3152	299
15°	3012	848
25°	2719	1244
35°	2094	1294
45°	1157	895
55°	419	390
65°	113	120
75°	33	36
85°	7	5
90°	0	



TEST NUMBER: P578048

CATALOG NUMBER: FLD6C-55-D010 FEU6C-X-90-27 F6X-W-X-H

CANDELA DISTRIBUTION (FULL):

0°	
0°	3164.6
2.5°	3171.3
5°	3151.5
7.5°	3124.9
10°	3091.5
12.5°	3058.3
15°	3011.9
17.5°	2951.9
20°	2885.5
22.5°	2812.3
25°	2719.4
27.5°	2599.6
30°	2446.7
32.5°	2287.0
35°	2094.4
37.5°	1881.7
40°	1635.5
42.5°	1389.6
45°	1156.8
47.5°	937.4
50°	744.7
52.5°	565.2
55°	419.0
57.5°	299.2
60°	206.0
62.5°	153.0
65°	113.0
67.5°	86.5
70°	59.8
72.5°	46.6
75°	33.2
77.5°	19.8
80°	13.4
82.5°	6.7
85°	6.7
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)