

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P578418

Luminaire Tested: **FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P578418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 6LBWLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6587.0 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 72
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P578418

CATALOG NUMBER: FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI

Luminous Intensity Polar Plot

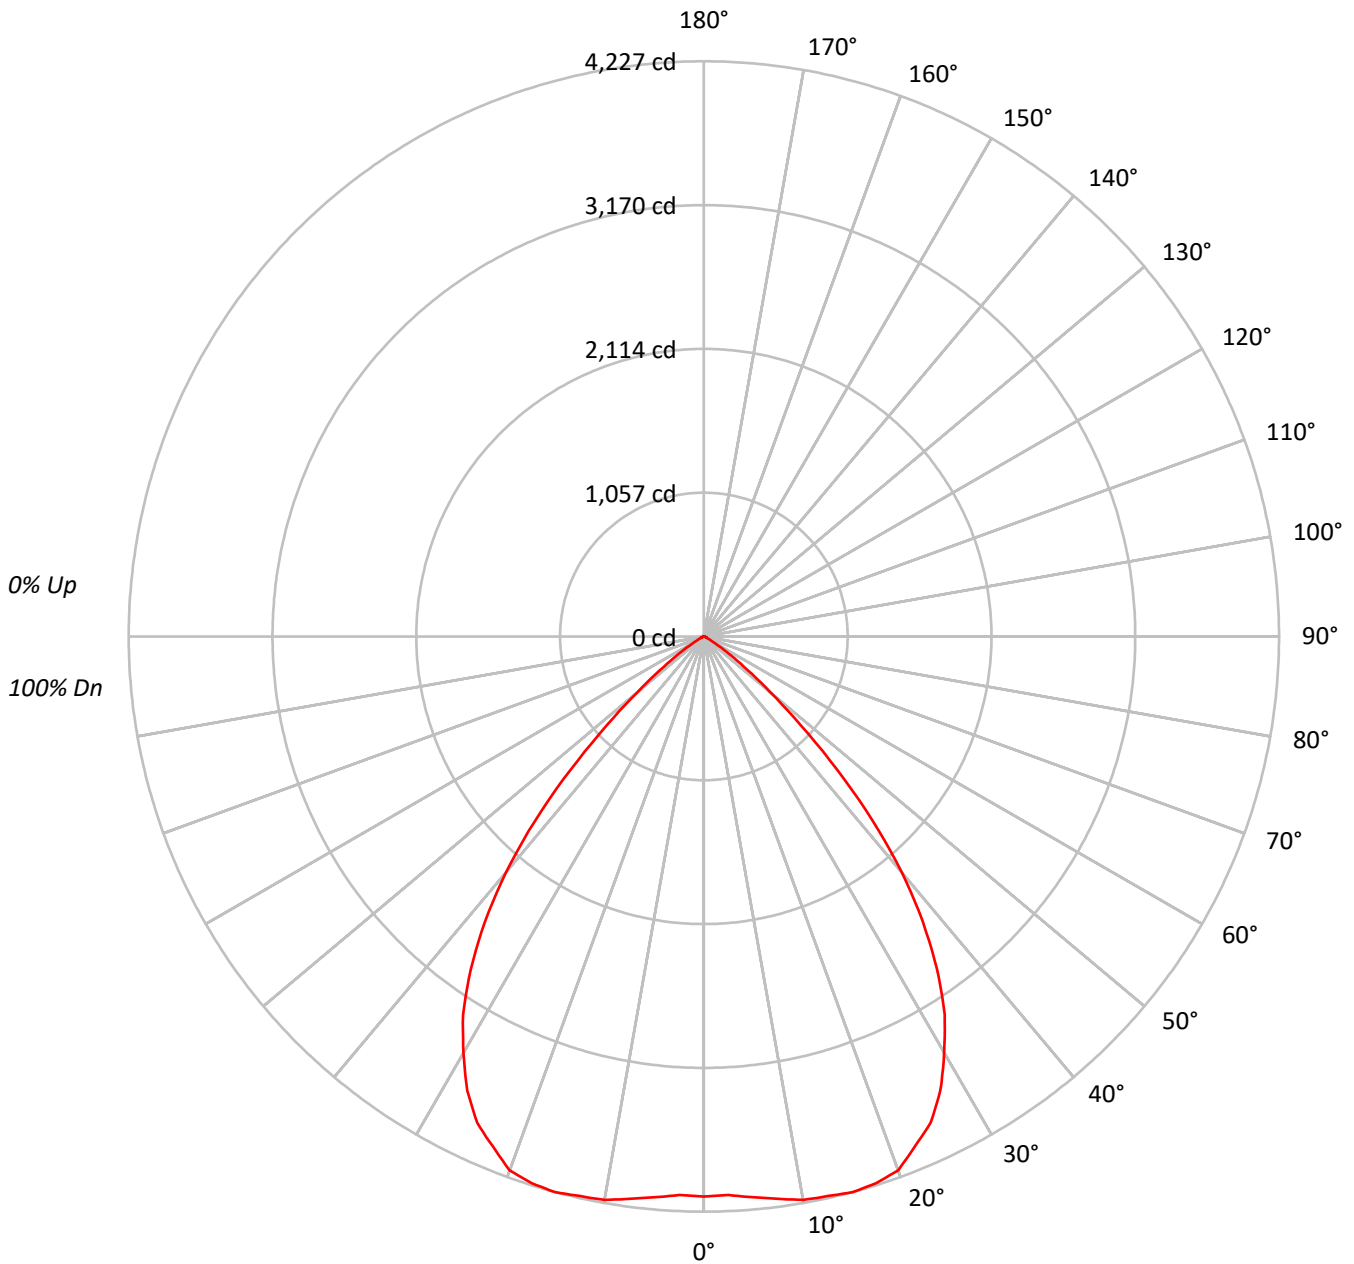



TEST NUMBER: P578418

CATALOG NUMBER: FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69			69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	225590
5°	227679
10°	234047
15°	239905
20°	243545
25°	238514
30°	223617
35°	199926
40°	161932
45°	107120
50°	54147
55°	22843
60°	7357
65°	2893
70°	2404
75°	1589
80°	0
85°	0



TEST NUMBER: P578418

CATALOG NUMBER: FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	397.0	6.0
10°-20°	1193.2	18.1
20°-30°	1798.7	27.3
30°-40°	1841.0	27.9
40°-50°	1072.5	16.3
50°-60°	246.5	3.7
60°-70°	30.2	0.5
70°-80°	7.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3388.9	51.4
0°-40°	5229.9	79.4
0°-60°	6548.9	99.4
0°-90°	6587.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6587.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4115	
5°	4137	397
15°	4227	1193
25°	3943	1799
35°	2987	1841
45°	1382	1073
55°	239	246
65°	22	30
75°	8	8
85°	0	0
90°	0	



TEST NUMBER: P578418

CATALOG NUMBER: FLD6C-60-D010 FEU6C-X-90-30 F6X-W-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4115.1
2.5°	4107.6
5°	4137.4
7.5°	4167.2
10°	4204.5
12.5°	4212.0
15°	4227.1
17.5°	4212.0
20°	4174.7
22.5°	4055.2
25°	3943.2
27.5°	3764.1
30°	3532.6
32.5°	3293.6
35°	2987.4
37.5°	2643.7
40°	2262.8
42.5°	1837.2
45°	1381.7
47.5°	963.3
50°	634.9
52.5°	403.4
55°	239.0
57.5°	127.0
60°	67.1
62.5°	37.3
65°	22.3
67.5°	22.3
70°	15.0
72.5°	7.5
75°	7.5
77.5°	7.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)