

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P578758

Luminaire Tested: **FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P578758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 6LBNLI TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5497.0 lumens
Efficiency: N/A
Efficacy: 75.9 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P578758

CATALOG NUMBER: FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI

Luminous Intensity Polar Plot

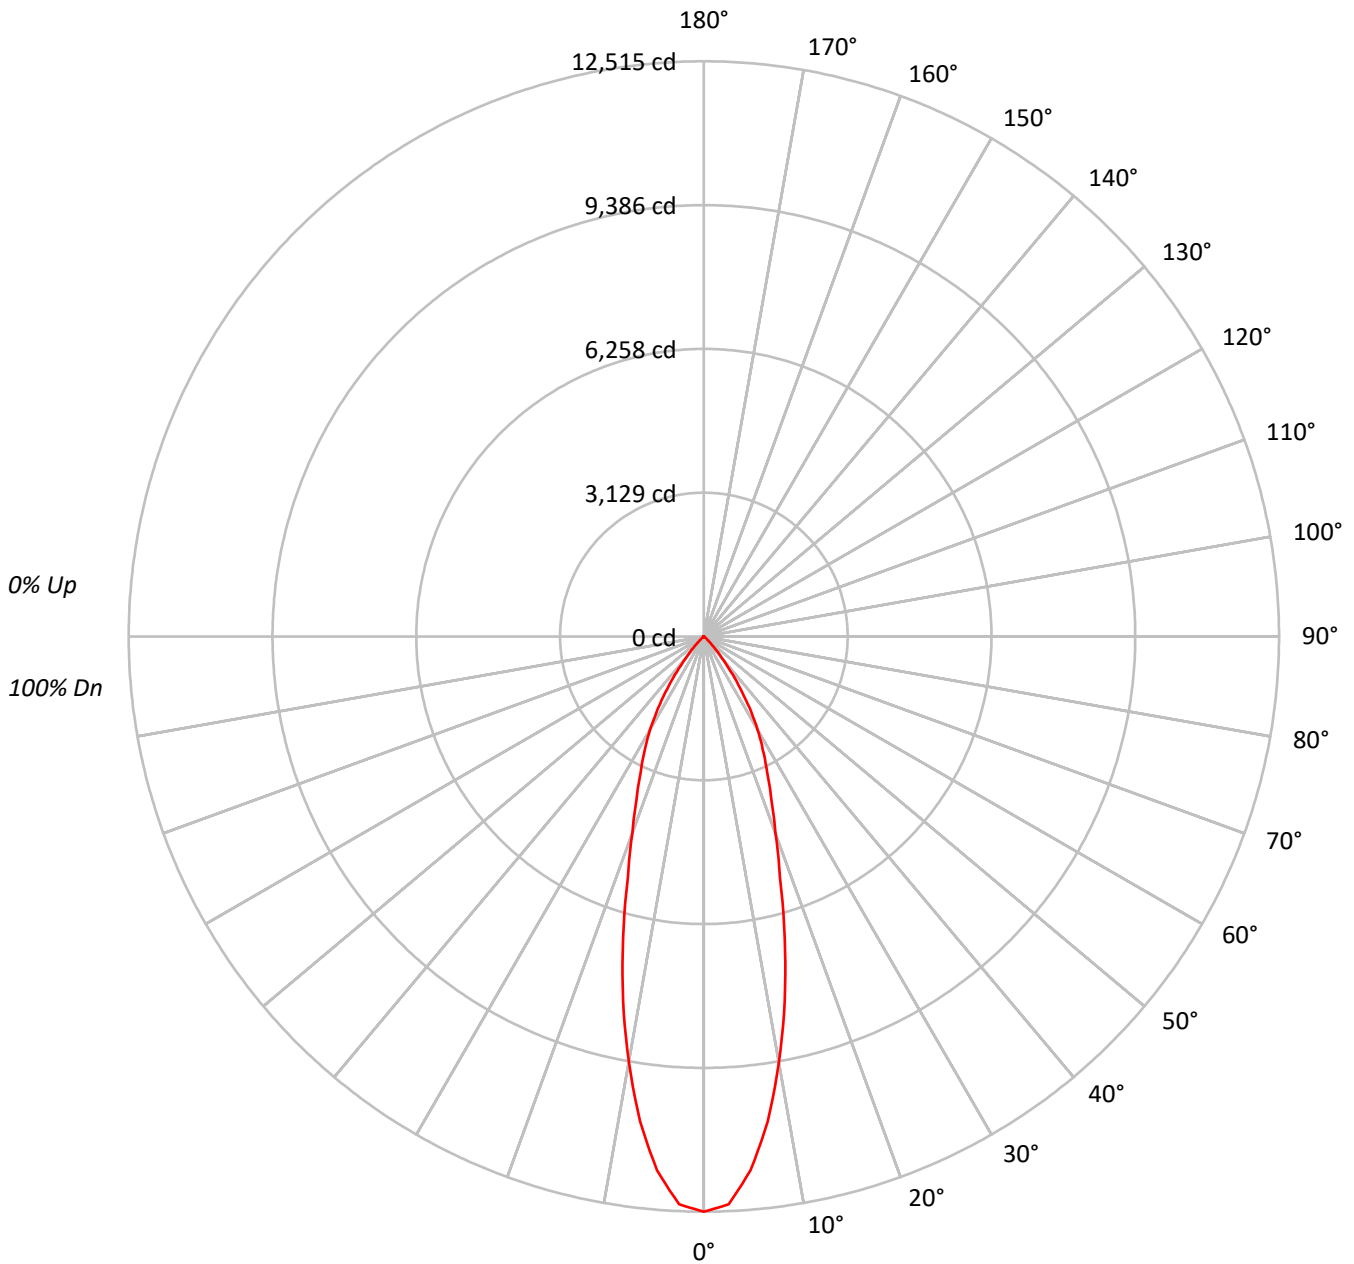



TEST NUMBER: P578758

CATALOG NUMBER: FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	686096
5°	641617
10°	523287
15°	385070
20°	265416
25°	197044
30°	148010
35°	92294
40°	44805
45°	15366
50°	2013
55°	1529
60°	877
65°	1038
70°	1282
75°	0
80°	0
85°	0



TEST NUMBER: P578758

CATALOG NUMBER: FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1040.6	18.9
10°-20°	1867.7	34.0
20°-30°	1510.1	27.5
30°-40°	869.9	15.8
40°-50°	183.9	3.3
50°-60°	15.9	0.3
60°-70°	7.9	0.1
70°-80°	1.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4418.4	80.4
0°-40°	5288.3	96.2
0°-60°	5488.1	99.8
0°-90°	5497.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5497.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12515	
5°	11660	###
15°	6785	1868
25°	3258	1510
35°	1379	870
45°	198	184
55°	16	16
65°	8	8
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P578758

CATALOG NUMBER: FLD6C-65-D010 FEU6C-X-90-35 F6X-N-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	12515.4
2.5°	12365.0
5°	11659.5
7.5°	10644.9
10°	9400.5
12.5°	8124.5
15°	6784.9
17.5°	5492.9
20°	4549.6
22.5°	3828.4
25°	3257.6
27.5°	2774.2
30°	2338.2
32.5°	1854.8
35°	1379.1
37.5°	959.0
40°	626.1
42.5°	380.5
45°	198.2
47.5°	79.2
50°	23.6
52.5°	23.6
55°	16.0
57.5°	16.0
60°	8.0
62.5°	8.0
65°	8.0
67.5°	8.0
70°	8.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)