

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P579218

Luminaire Tested: **FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P579218  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI  
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 6LBMLI TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7246.0 lumens  
Efficiency: N/A  
Efficacy: 88.9 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 81.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P579218

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI

### Luminous Intensity Polar Plot

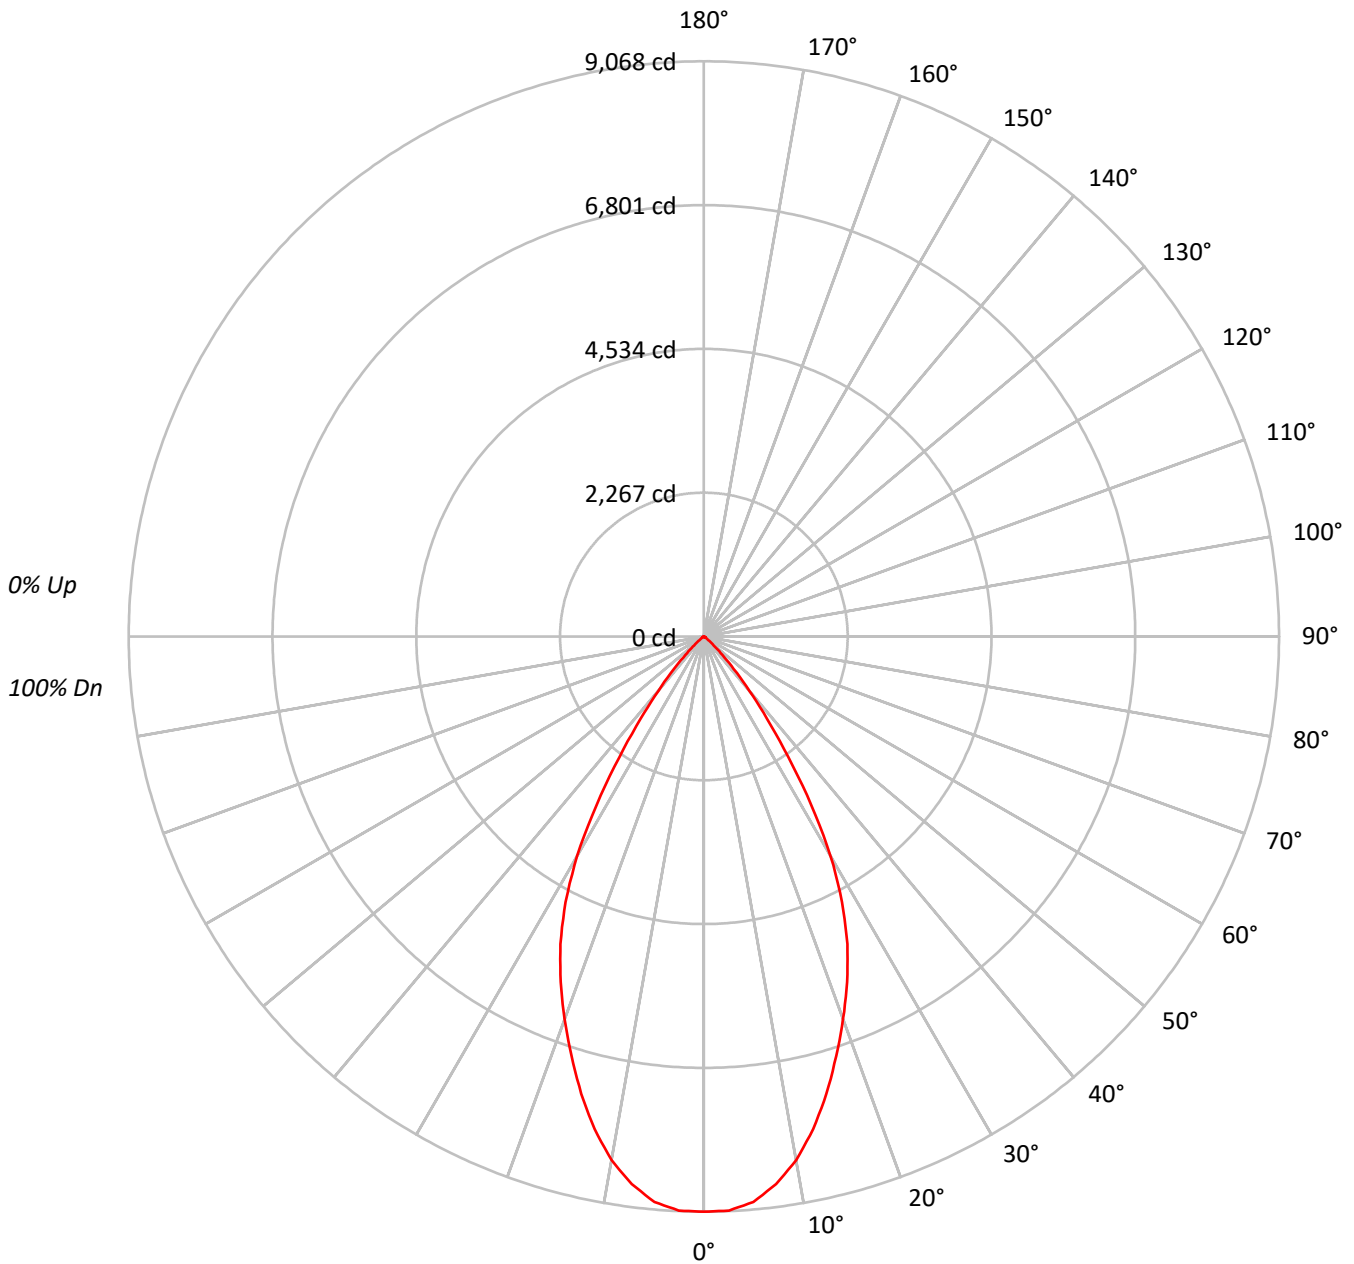



TEST NUMBER: P579218

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	497109
5°	492383
10°	466575
15°	423606
20°	374317
25°	323613
30°	252963
35°	155128
40°	79628
45°	31631
50°	10268
55°	3536
60°	3037
65°	2426
70°	1491
75°	1970
80°	0
85°	0



TEST NUMBER: P579218

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	835.4	11.5
10°-20°	2079.8	28.7
20°-30°	2417.6	33.4
30°-40°	1480.5	20.4
40°-50°	367.6	5.1
50°-60°	42.9	0.6
60°-70°	16.1	0.2
70°-80°	6.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5332.7	73.6
0°-40°	6813.2	94.0
0°-60°	7223.8	99.7
0°-90°	7246.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7246.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9068	
5°	8948	835
15°	7464	2080
25°	5350	2418
35°	2318	1480
45°	408	368
55°	37	43
65°	19	16
75°	9	6
85°	0	0
90°	0	



TEST NUMBER: P579218

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-27 F6X-M-X-LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9068.0
2.5°	9058.7
5°	8947.6
7.5°	8706.4
10°	8381.7
12.5°	7955.4
15°	7463.9
17.5°	6935.5
20°	6416.3
22.5°	5896.9
25°	5350.1
27.5°	4719.5
30°	3996.2
32.5°	3152.5
35°	2318.0
37.5°	1631.8
40°	1112.7
42.5°	695.3
45°	408.0
47.5°	231.9
50°	120.4
52.5°	55.7
55°	37.0
57.5°	27.7
60°	27.7
62.5°	18.7
65°	18.7
67.5°	9.3
70°	9.3
72.5°	9.3
75°	9.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)