

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P579388

Luminaire Tested: **FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P579388
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 4000K, 90 CRI LEDS, 6LBMH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6251.1 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 81.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P579388

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H

Luminous Intensity Polar Plot

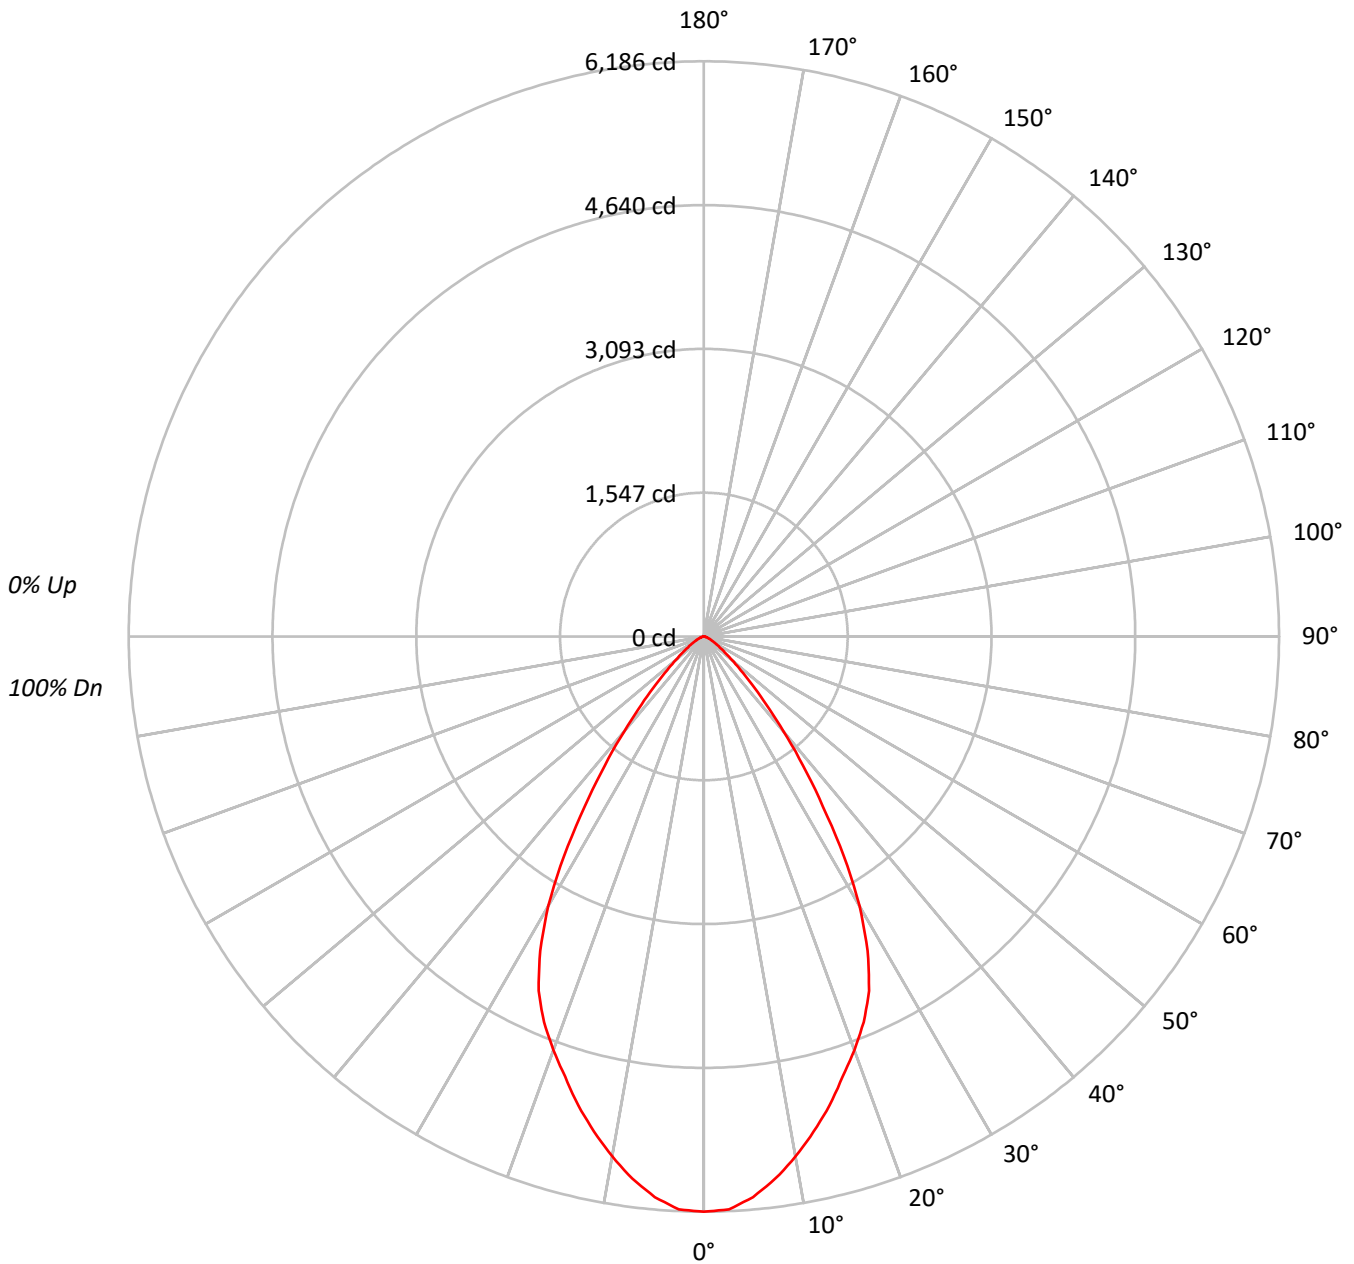



TEST NUMBER: P579388

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	339134
5°	333061
10°	316048
15°	296369
20°	276011
25°	254313
30°	211906
35°	149352
40°	95185
45°	56766
50°	33508
55°	21313
60°	14681
65°	10416
70°	7165
75°	5676
80°	2778
85°	0



TEST NUMBER: P579388

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	565.6	9.0
10°-20°	1463.3	23.4
20°-30°	1896.0	30.3
30°-40°	1407.6	22.5
40°-50°	594.3	9.5
50°-60°	211.0	3.4
60°-70°	81.4	1.3
70°-80°	28.2	0.5
80°-90°	3.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3924.9	62.8
0°-40°	5332.6	85.3
0°-60°	6137.8	98.2
0°-90°	6251.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6251.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6186	
5°	6052	566
15°	5222	1463
25°	4204	1896
35°	2232	1408
45°	732	594
55°	223	211
65°	80	81
75°	27	28
85°	0	4
90°	0	



TEST NUMBER: P579388

CATALOG NUMBER: FLD6C-75-D010 FEU6C-X-90-40 F6X-M-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	6186.3
2.5°	6168.4
5°	6052.4
7.5°	5882.6
10°	5677.6
12.5°	5454.2
15°	5222.0
17.5°	4963.4
20°	4731.2
22.5°	4490.2
25°	4204.4
27.5°	3811.6
30°	3347.6
32.5°	2802.8
35°	2231.7
37.5°	1749.7
40°	1330.1
42.5°	990.8
45°	732.2
47.5°	535.6
50°	392.9
52.5°	294.6
55°	223.0
57.5°	169.5
60°	133.9
62.5°	98.3
65°	80.3
67.5°	62.4
70°	44.7
72.5°	35.6
75°	26.8
77.5°	18.0
80°	8.8
82.5°	8.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)