

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P574468

Luminaire Tested: **FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H**

Issue Date: 3/1/2023



Test Information

Test Method: LM-79-08
Report Number: P574468
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/1/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 6LBMH TRIM

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 657.0 lumens
Efficiency: N/A
Efficacy: 66.6 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.87
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P574468

CATALOG NUMBER: FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H

Luminous Intensity Polar Plot

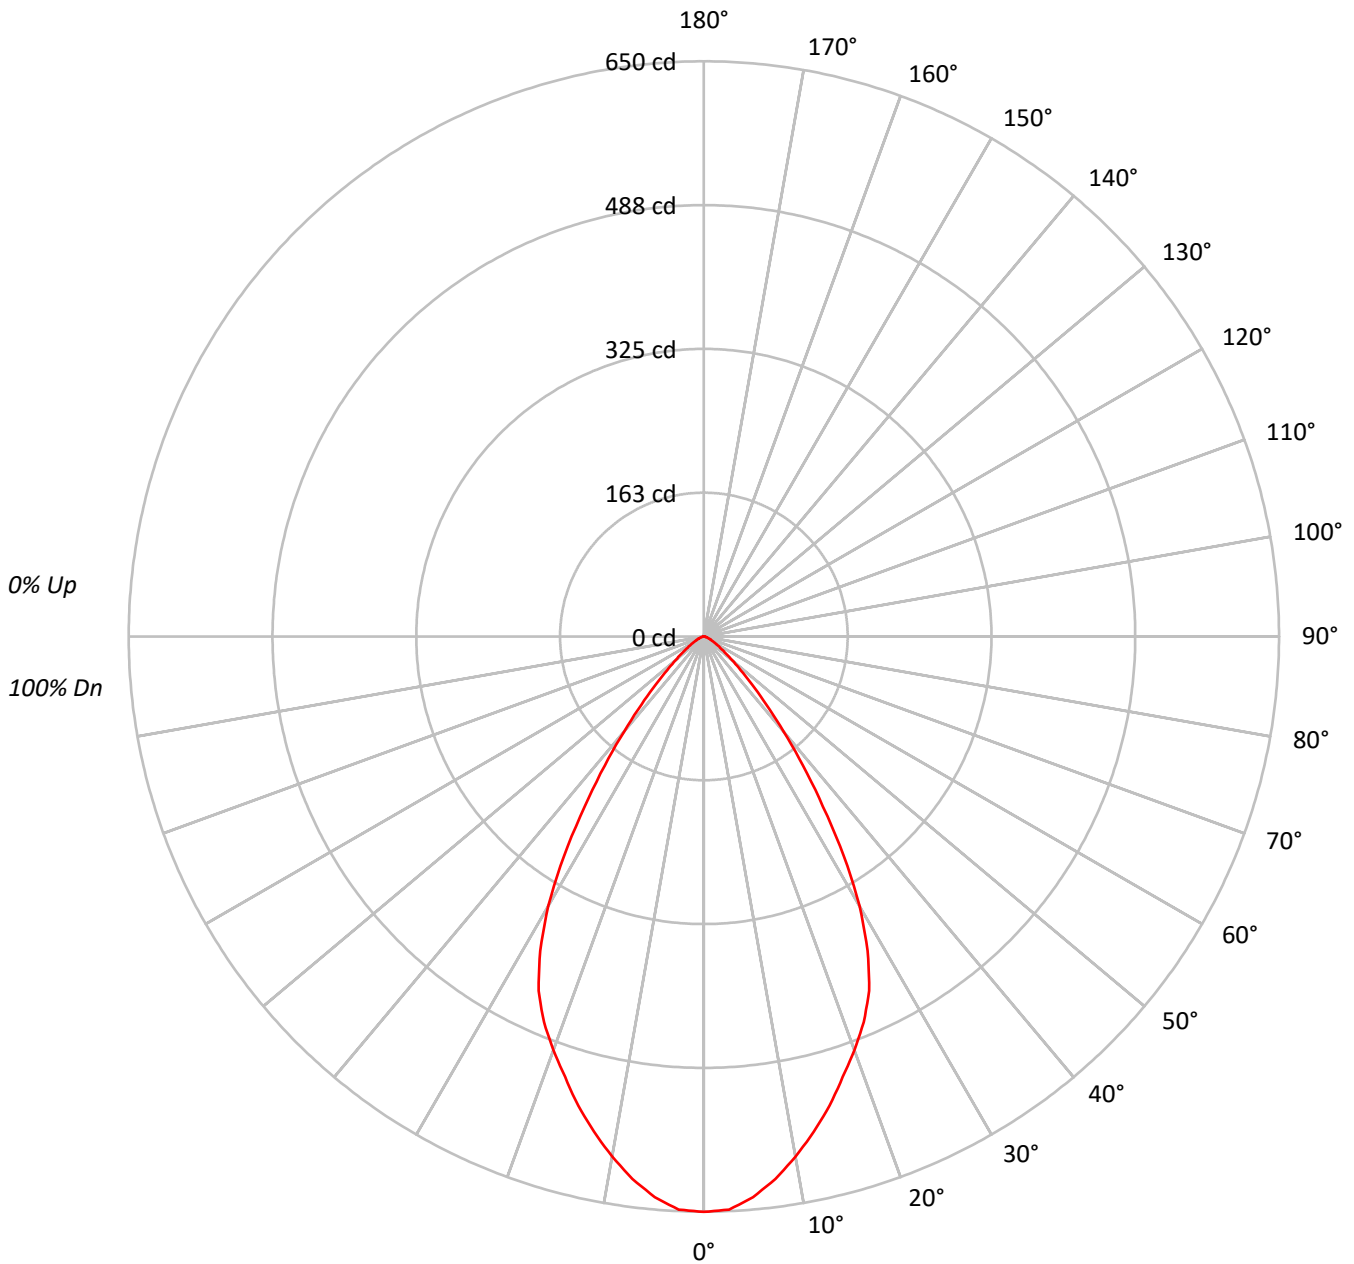



TEST NUMBER: P574468

CATALOG NUMBER: FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92	92	92	92
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	88	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61	61	61	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57	57	57	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53	53	53	53
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49	49	49	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	35644
5°	35004
10°	33216
15°	31147
20°	29012
25°	26729
30°	22269
35°	15700
40°	10004
45°	5970
50°	3522
55°	2236
60°	1546
65°	1090
70°	753
75°	593
80°	284
85°	0



TEST NUMBER: P574468

CATALOG NUMBER: FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.4	9.0
10°-20°	153.8	23.4
20°-30°	199.3	30.3
30°-40°	148.0	22.5
40°-50°	62.5	9.5
50°-60°	22.2	3.4
60°-70°	8.6	1.3
70°-80°	2.9	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	412.5	62.8
0°-40°	560.5	85.3
0°-60°	645.1	98.2
0°-90°	657.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	657.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	650	
5°	636	59
15°	549	154
25°	442	199
35°	235	148
45°	77	62
55°	23	22
65°	8	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P574468

CATALOG NUMBER: FLD6C-08-D010 FEU6C-X-90-30 F6X-M-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	650.2
2.5°	648.3
5°	636.1
7.5°	618.3
10°	596.7
12.5°	573.3
15°	548.8
17.5°	521.7
20°	497.3
22.5°	471.9
25°	441.9
27.5°	400.6
30°	351.8
32.5°	294.6
35°	234.6
37.5°	183.9
40°	139.8
42.5°	104.1
45°	77.0
47.5°	56.3
50°	41.3
52.5°	31.0
55°	23.4
57.5°	17.8
60°	14.1
62.5°	10.3
65°	8.4
67.5°	6.6
70°	4.7
72.5°	3.7
75°	2.8
77.5°	1.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC





— 0°-180°







(END OF REPORT)