

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P579978

Luminaire Tested: **FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI**

Issue Date: 3/1/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P579978  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/1/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI  
Description: 6 INCH FAIL-SAFE LED DOWNLIGHT WITH 3500K, 90 CRI LEDS, 6LBWLI TRIM

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9926.0 lumens  
Efficiency: N/A  
Efficacy: 102.2 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 97.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P579978

CATALOG NUMBER: FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI

### Luminous Intensity Polar Plot

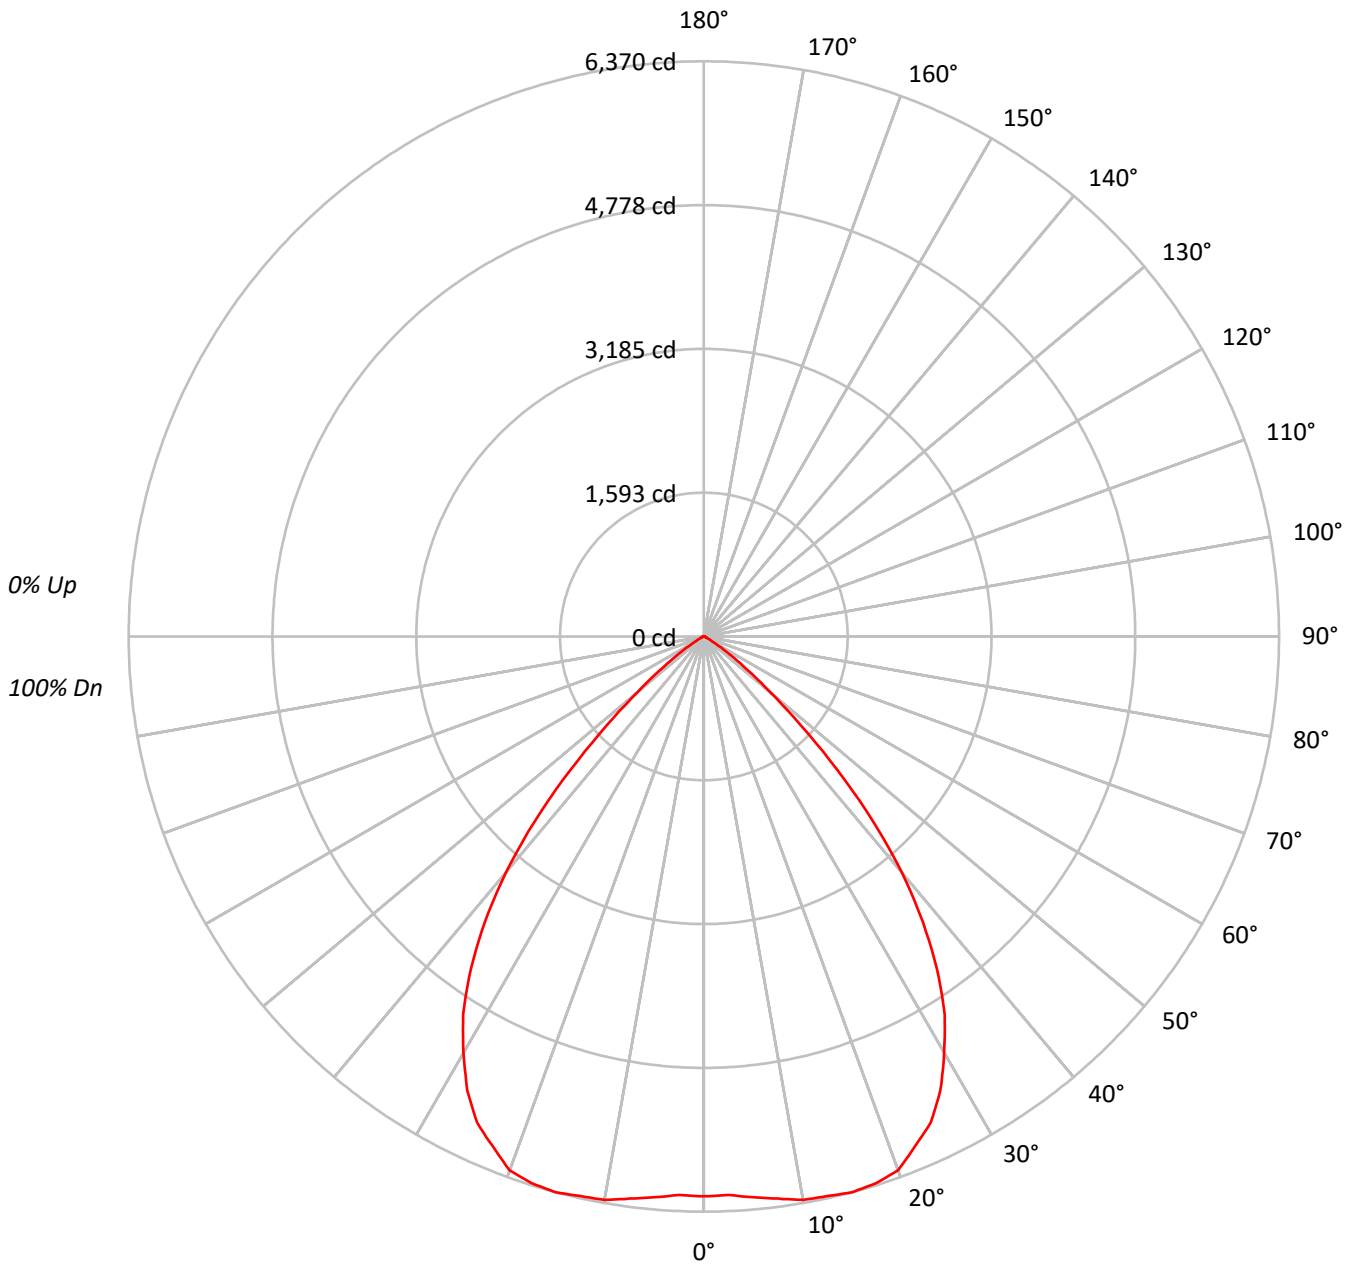



TEST NUMBER: P579978

CATALOG NUMBER: FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92			92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76			76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69			69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63			63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57			57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48			48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44			44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41			41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	339940
5°	343087
10°	352688
15°	361512
20°	367001
25°	359416
30°	336970
35°	301268
40°	244021
45°	161420
50°	81592
55°	34426
60°	11096
65°	4358
70°	3638
75°	2393
80°	0
85°	0



TEST NUMBER: P579978

CATALOG NUMBER: FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	598.2	6.0
10°-20°	1798.0	18.1
20°-30°	2710.4	27.3
30°-40°	2774.2	27.9
40°-50°	1616.2	16.3
50°-60°	371.4	3.7
60°-70°	45.6	0.5
70°-80°	11.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5106.7	51.4
0°-40°	7880.9	79.4
0°-60°	9868.5	99.4
0°-90°	9926.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9926.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6201	
5°	6235	598
15°	6370	1798
25°	5942	2710
35°	4502	2774
45°	2082	1616
55°	360	371
65°	34	46
75°	11	12
85°	0	0
90°	0	



TEST NUMBER: P579978

CATALOG NUMBER: FLD6C-90-D010 FEU6C-X-90-35 F6X-W-X-LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6201.0
2.5°	6189.7
5°	6234.6
7.5°	6279.5
10°	6335.8
12.5°	6347.1
15°	6369.8
17.5°	6347.1
20°	6290.9
22.5°	6110.8
25°	5942.0
27.5°	5672.1
30°	5323.3
32.5°	4963.1
35°	4501.7
37.5°	3983.7
40°	3409.9
42.5°	2768.5
45°	2082.1
47.5°	1451.6
50°	956.7
52.5°	607.8
55°	360.2
57.5°	191.4
60°	101.2
62.5°	56.3
65°	33.6
67.5°	33.6
70°	22.7
72.5°	11.3
75°	11.3
77.5°	11.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-MV3F9LC







— 0°-180°







(END OF REPORT)