

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P#

Luminaire Tested: **FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW**

Issue Date: 12/13/2022

Tested By:

Approved By:



Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

Test Information

Test Method: LM-79-08
 Report Number: P#
 Test Lab: INNOVATION CENTER
 Issue Date: 12/13/2022
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
 Product Line: FAIL-SAFE
 Catalog Number: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW
 Description: 4 INCH 2000 LUMEN FAIL-SAFE LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND F4LC-CSSQ TRIM WITH MW FINISH
 Light Source: -
 Ballast/Driver: -

Summary


Lumens per Lamp: N/A
 Luminaire Lumens: 1955.0 lumens
 Efficiency: N/A
 Efficacy: 89.7 lumens/watt
 Spacing Criteria (0/90/45): 1.19 / 1.2 / 1.29
 Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
 CIE Type: Direct

Input Watts (W): 21.8
 Input Voltage (V):
 Input Current (Ain): NR
 Voltage Rise (V): NR
 Power Factor: NR
 Total Harmonic Distortion (THDi): NR
 Frequency (hertz): 60
 Stabilization Time: NR
 Operation Time: NR
 Ambient Temperature (°C): NR
 Test Distance: 25 FT

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	GONIO 1 IN0055	4/22/2021	10/22/2021
Power Meter	XITRON 2801 IN0197	12/1/2020	12/1/2021
AC Power Source	CHROMA 61505 IN0196	12/1/2020	12/1/2021
DC Power Supply	AGILENT E3634A IN0198	11/30/2020	11/30/2021
Room Thermometer	ONSET IN0143	12/1/2020	12/1/2021

TEST NUMBER: P#
CATALOG NUMBER: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW

Luminous Intensity Polar Plot

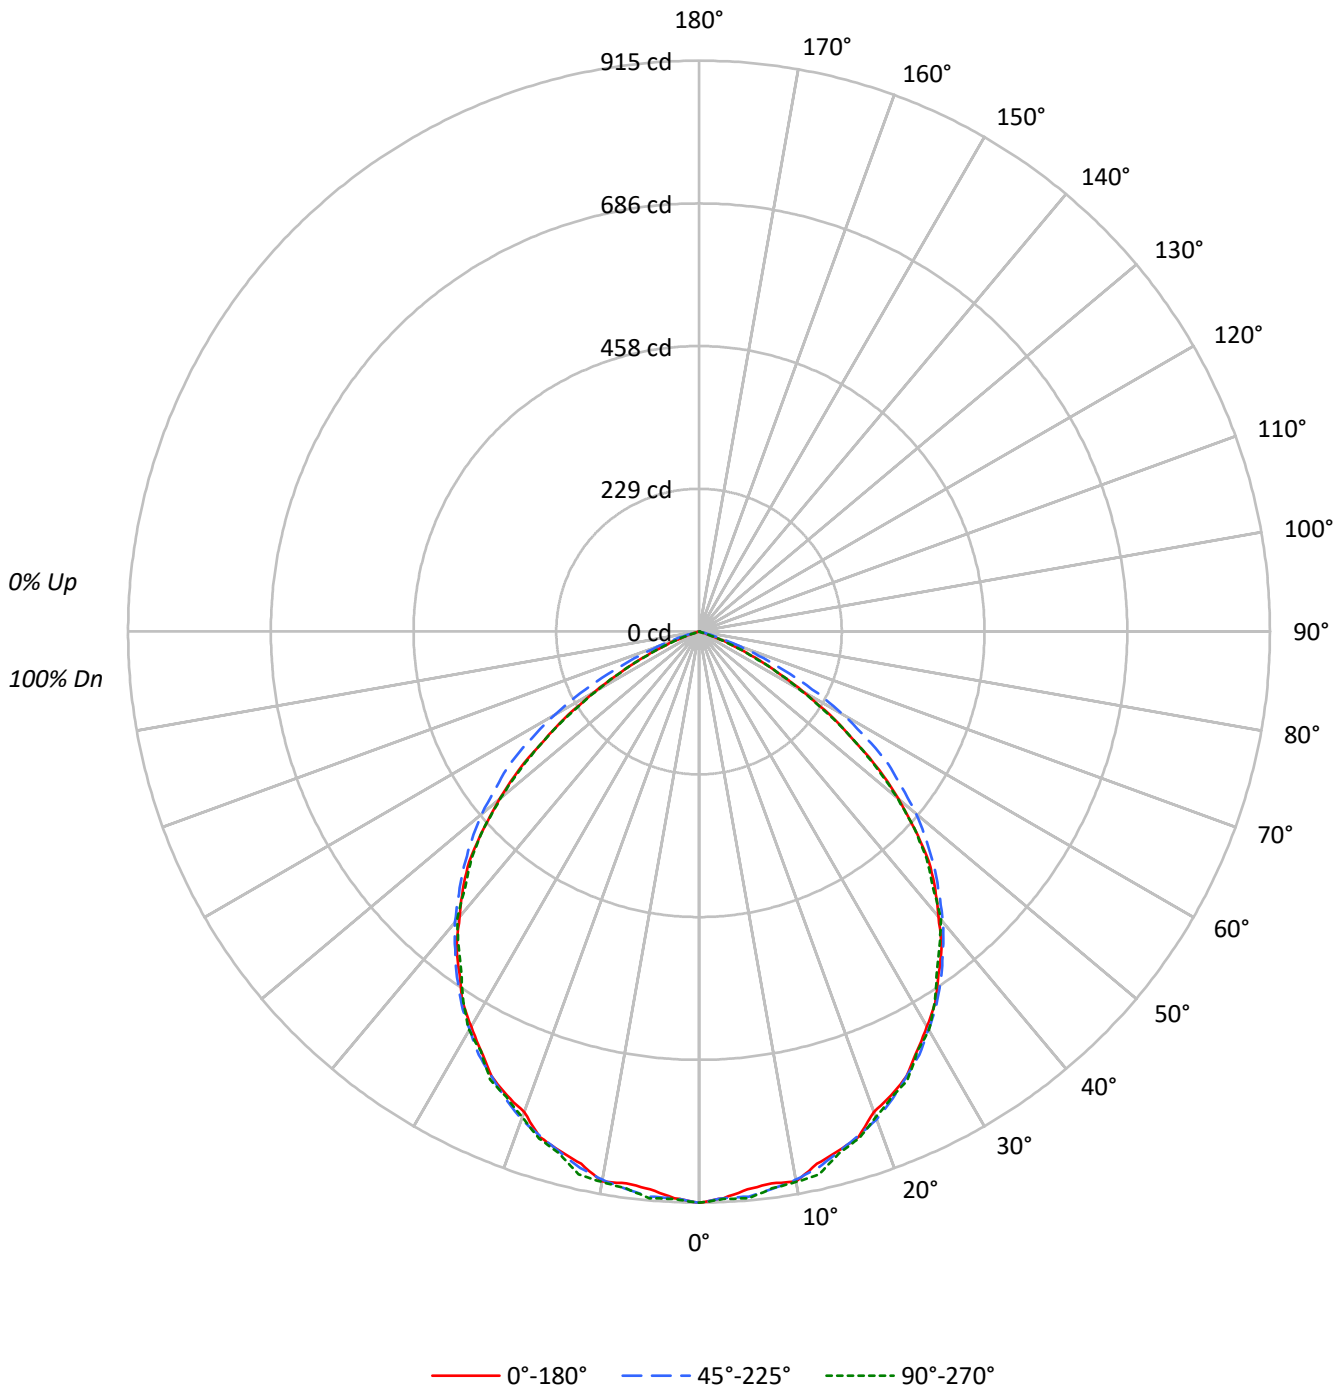

TEST NUMBER: P#

CATALOG NUMBER: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89				89
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77				77
3	95	86	79	74	93	85	78	73	82	76	72	79	74	71	77	73	69	67				67
4	88	77	70	64	86	76	69	63	74	67	63	71	66	62	69	65	61	59				59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	54	63	58	54	52				52
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46				46
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41				41
8	65	53	45	40	64	52	45	39	51	44	39	50	44	39	49	43	39	37				37
9	61	49	41	36	60	48	41	36	47	40	36	46	40	35	45	39	35	33				33
10	57	45	38	33	56	44	37	33	44	37	32	43	37	32	42	36	32	31				31

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	88307	88307	88307
5°	86881	88014	88266
10°	87631	87376	87758
15°	86097	86227	86487
20°	84096	85431	85030
25°	83734	83734	84287
30°	81400	81980	82125
35°	78861	79627	78249
40°	75159	76632	75977
45°	71134	72731	70425
50°	62641	68105	62251
55°	50736	62327	50955
60°	37129	51679	36376
65°	22557	36804	21964
70°	8802	19804	8435
75°	969	5331	969
80°	722	722	722
85°	0	0	0

TEST NUMBER: P#
 CATALOG NUMBER: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.4	4.4
10°-20°	244.5	12.5
20°-30°	362.7	18.6
30°-40°	420.3	21.5
40°-50°	403.0	20.6
50°-60°	296.3	15.2
60°-70°	128.0	6.5
70°-80°	13.8	0.7
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	693.6	35.5
0°-40°	1113.8	57.0
0°-60°	1813.1	92.7
0°-90°	1955.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1955.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	915	915	915	915	915	
5°	897	906	909	910	911	86
15°	862	867	863	864	866	243
25°	786	785	786	788	792	360
35°	670	673	676	675	664	419
45°	521	523	533	525	516	396
55°	302	333	370	332	303	271
65°	99	124	161	122	96	102
75°	3	4	14	3	3	8
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P#
 CATALOG NUMBER: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2
2.5°	908.7	919.1	920.4	913.9	911.3	907.4	916.5	910.0	912.6	910.0	908.7
5°	897.0	908.7	910.0	910.0	907.4	906.1	910.0	908.7	907.4	904.8	908.7
7.5°	891.8	898.3	904.8	897.0	900.9	899.6	908.7	904.8	903.5	903.5	900.9
10°	894.4	893.1	898.3	890.5	893.1	890.5	898.3	898.3	895.7	893.1	891.8
12.5°	873.6	884.0	884.0	882.7	880.1	876.2	884.0	889.2	881.4	881.4	880.1
15°	861.9	864.5	865.8	865.8	864.5	867.1	871.0	865.8	867.1	860.6	863.2
17.5°	848.9	843.7	847.6	845.0	846.3	848.9	854.1	854.1	846.3	845.0	847.6
20°	819.0	834.6	835.9	828.1	829.4	829.4	838.5	830.7	835.9	829.4	832.0
22.5°	804.7	815.1	816.4	806.0	812.5	804.7	813.8	802.1	815.1	806.0	809.9
25°	786.5	785.2	789.1	783.9	785.2	785.2	791.7	786.5	790.4	785.2	786.5
27.5°	756.6	767.0	765.7	760.5	763.1	761.8	774.8	760.5	768.3	761.8	764.4
30°	730.6	739.7	737.1	731.9	731.9	728.0	742.3	738.4	737.1	737.1	735.8
32.5°	704.6	705.9	703.3	704.6	705.9	700.7	712.4	707.2	705.9	707.2	708.5
35°	669.5	669.5	672.1	668.2	673.4	673.4	683.8	677.3	676.0	672.1	676.0
37.5°	638.3	634.4	635.7	635.7	638.3	640.9	646.1	643.5	643.5	639.6	642.2
40°	596.7	594.1	598.0	598.0	601.9	601.9	607.1	604.5	608.4	608.4	608.4
42.5°	560.3	560.3	557.7	561.6	562.9	561.6	570.7	569.4	570.7	568.1	569.4
45°	521.3	521.3	518.7	517.4	523.9	522.6	533.0	529.1	534.3	531.7	533.0
47.5°	468.0	474.5	470.6	474.5	482.3	483.6	490.1	487.5	492.7	488.8	494.0
50°	417.3	417.3	421.2	426.4	434.2	435.5	443.3	448.5	451.1	452.4	453.7
52.5°	364.0	362.7	366.6	373.1	379.6	384.8	392.6	400.4	405.6	413.4	409.5
55°	301.6	304.2	308.1	315.9	326.3	332.8	339.3	349.7	358.8	362.7	370.5
57.5°	248.3	245.7	248.3	258.7	270.4	275.6	284.7	295.1	308.1	315.9	318.5
60°	192.4	193.7	196.3	205.4	214.5	222.3	226.2	243.1	254.8	262.6	267.8
62.5°	141.7	144.3	146.9	154.7	163.8	170.3	176.8	191.1	201.5	209.3	214.5
65°	98.8	100.1	104.0	107.9	117.0	123.5	128.7	140.4	150.8	157.3	161.2
67.5°	61.1	62.4	65.0	70.2	76.7	81.9	87.1	94.9	104.0	110.5	111.8
70°	31.2	32.5	33.8	37.7	42.9	45.5	49.4	55.9	62.4	67.6	70.2
72.5°	10.4	10.4	11.7	14.3	16.9	19.5	20.8	27.3	32.5	35.1	36.4
75°	2.6	2.6	2.6	2.6	2.6	3.9	3.9	7.8	10.4	13.0	14.3
77.5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	2.6	2.6
80°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P#
 CATALOG NUMBER: FLDSQ4C20D010 FEU4C209030 F4LC-CSSQ-MW

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°
0°	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2	915.2
2.5°	915.2	912.6	911.3	912.6	912.6	911.3	915.2	920.4	926.9	910.0
5°	913.9	911.3	913.9	906.1	910.0	907.4	912.6	911.3	916.5	911.3
7.5°	910.0	904.8	906.1	902.2	907.4	900.9	904.8	912.6	907.4	899.6
10°	897.0	894.4	903.5	890.5	887.9	893.1	903.5	895.7	893.1	895.7
12.5°	884.0	884.0	887.9	877.5	878.8	881.4	886.6	881.4	884.0	890.5
15°	869.7	867.1	873.6	865.8	864.5	861.9	867.1	867.1	869.7	865.8
17.5°	852.8	848.9	848.9	846.3	845.0	851.5	854.1	855.4	856.7	851.5
20°	832.0	830.7	834.6	830.7	832.0	833.3	833.3	830.7	842.4	828.1
22.5°	809.9	813.8	808.6	806.0	808.6	811.2	811.2	812.5	809.9	807.3
25°	787.8	790.4	791.7	783.9	787.8	783.9	793.0	794.3	789.1	791.7
27.5°	768.3	764.4	763.1	757.9	760.5	759.2	760.5	760.5	768.3	757.9
30°	738.4	734.5	735.8	731.9	733.2	731.9	733.2	733.2	738.4	737.1
32.5°	709.8	705.9	707.2	703.3	703.3	704.6	702.0	702.0	705.9	703.3
35°	682.5	673.4	674.7	673.4	674.7	669.5	669.5	668.2	670.8	664.3
37.5°	643.5	639.6	638.3	637.0	638.3	635.7	638.3	634.4	638.3	633.1
40°	608.4	605.8	607.1	599.3	599.3	600.6	598.0	596.7	598.0	603.2
42.5°	573.3	568.1	565.5	562.9	564.2	560.3	559.0	556.4	559.0	553.8
45°	531.7	531.7	530.4	523.9	525.2	525.2	520.0	514.8	516.1	516.1
47.5°	494.0	491.4	490.1	483.6	482.3	481.0	475.8	471.9	471.9	468.0
50°	452.4	449.8	445.9	439.4	436.8	429.0	425.1	419.9	414.7	414.7
52.5°	413.4	404.3	399.1	388.7	384.8	380.9	370.5	366.6	362.7	358.8
55°	366.6	358.8	348.4	336.7	331.5	325.0	314.6	306.8	301.6	302.9
57.5°	321.1	308.1	297.7	282.1	275.6	271.7	261.3	250.9	245.7	245.7
60°	265.2	254.8	241.8	227.5	222.3	215.8	202.8	196.3	192.4	188.5
62.5°	211.9	204.1	192.4	174.2	170.3	163.8	154.7	146.9	143.0	143.0
65°	158.6	150.8	140.4	127.4	122.2	117.0	109.2	101.4	97.5	96.2
67.5°	111.8	102.7	93.6	83.2	79.3	76.7	68.9	63.7	61.1	59.8
70°	67.6	62.4	55.9	48.1	44.2	41.6	36.4	32.5	31.2	29.9
72.5°	35.1	31.2	26.0	20.8	18.2	15.6	13.0	10.4	9.1	9.1
75°	13.0	10.4	6.5	3.9	2.6	2.6	2.6	2.6	2.6	2.6
77.5°	2.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
80°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)