

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P#

Luminaire Tested: **FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW**

Issue Date: 12/13/2022

Tested By:

Approved By:



Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

**Test Information**

Test Method: LM-79-08  
 Report Number: P#  
 Test Lab: INNOVATION CENTER  
 Issue Date: 12/13/2022  
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
 Product Line: FAIL-SAFE  
 Catalog Number: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW  
 Description: 4 INCH 7500 LUMEN FAIL-SAFE LED DOWNLIGHT WITH, 2700K, 90CRI LEDS AND F4LC-CSSQ TRIM WITH MW FINISH  
 Light Source: -  
 Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
 Luminaire Lumens: 7775.0 lumens  
 Efficiency: N/A  
 Efficacy: 95.4 lumens/watt  
 Spacing Criteria (0/90/45): 1.19 / 1.2 / 1.29  
 Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')  
 CIE Type: Direct

Input Watts (W): 81.5  
 Input Voltage (V):  
 Input Current (Ain): NR  
 Voltage Rise (V): NR  
 Power Factor: NR  
 Total Harmonic Distortion (THDi): NR  
 Frequency (hertz): 60  
 Stabilization Time: NR  
 Operation Time: NR  
 Ambient Temperature (°C): NR  
 Test Distance: 25 FT

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	GONIO 1 IN0055	4/22/2021	10/22/2021
Power Meter	XITRON 2801 IN0197	12/1/2020	12/1/2021
AC Power Source	CHROMA 61505 IN0196	12/1/2020	12/1/2021
DC Power Supply	AGILENT E3634A IN0198	11/30/2020	11/30/2021
Room Thermometer	ONSET IN0143	12/1/2020	12/1/2021

TEST NUMBER: P#  
CATALOG NUMBER: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW

### Luminous Intensity Polar Plot

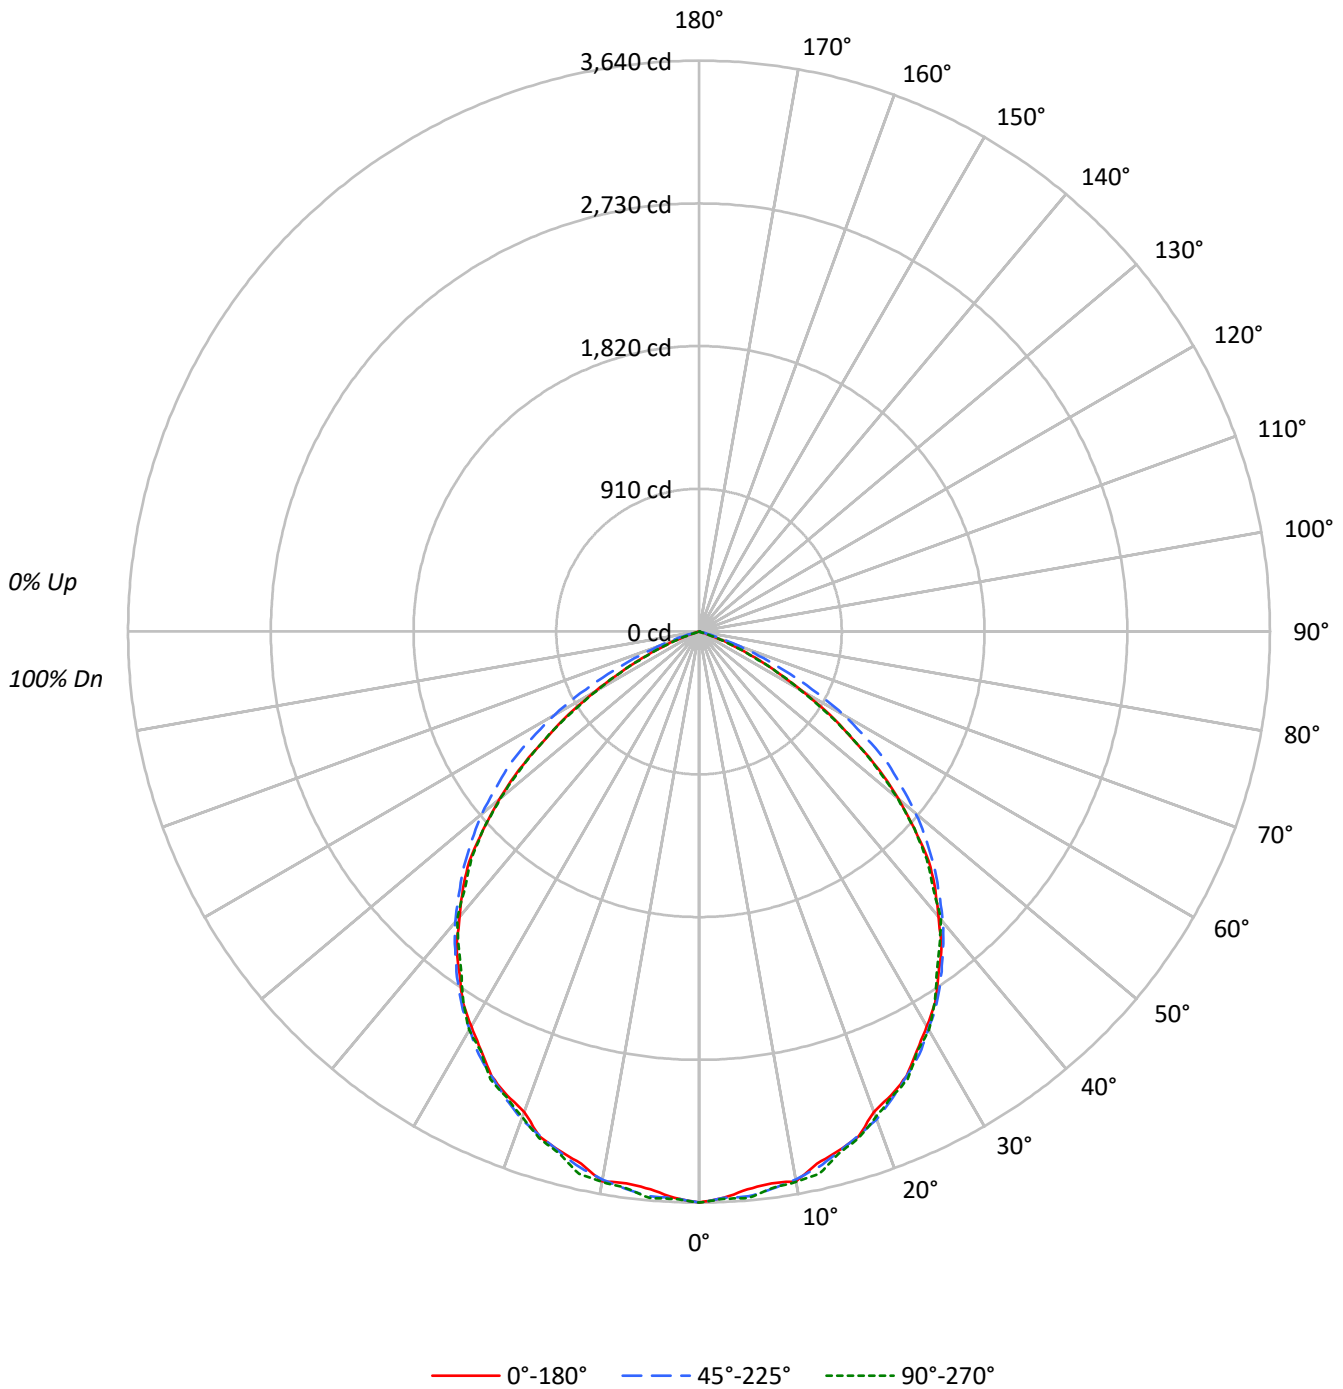

TEST NUMBER: P#

CATALOG NUMBER: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	89				89
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77				77
3	95	86	79	74	93	85	78	73	82	76	72	79	74	71	77	73	69	67				67
4	88	77	70	64	86	76	69	63	74	67	63	71	66	62	69	65	61	59				59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	54	63	58	54	52				52
6	75	63	55	49	73	62	55	49	61	54	49	59	53	48	57	52	48	46				46
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41				41
8	65	53	45	40	64	52	45	39	51	44	39	50	44	39	49	43	39	37				37
9	61	49	41	36	60	48	41	36	47	40	36	46	40	35	45	39	35	33				33
10	57	45	38	33	56	44	37	33	44	37	32	43	37	32	42	36	32	31				31

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	351191	351191	351191
5°	345529	350024	351021
10°	348506	347496	349005
15°	342402	342912	343940
20°	334443	339752	338171
25°	332997	332997	335201
30°	323719	326014	326604
35°	313619	316670	311181
40°	298897	304754	302146
45°	282887	289246	280062
50°	249123	270859	247577
55°	201767	247860	202659
60°	147647	205521	144675
65°	89727	146348	87352
70°	34982	78795	33572
75°	3840	21213	3840
80°	2945	2945	2945
85°	0	0	0

TEST NUMBER: P#  
 CATALOG NUMBER: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	343.6	4.4
10°-20°	972.2	12.5
20°-30°	1442.5	18.6
30°-40°	1671.4	21.5
40°-50°	1602.5	20.6
50°-60°	1178.3	15.2
60°-70°	508.9	6.5
70°-80°	54.9	0.7
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2758.2	35.5
0°-40°	4429.6	57.0
0°-60°	7210.4	92.7
0°-90°	7775.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7775.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3640	3640	3640	3640	3640	
5°	3567	3603	3614	3619	3624	340
15°	3428	3448	3433	3438	3443	966
25°	3128	3123	3128	3133	3148	1432
35°	2662	2678	2688	2683	2642	1665
45°	2073	2078	2120	2089	2052	1576
55°	1199	1323	1473	1318	1205	1079
65°	393	491	641	486	383	404
75°	10	16	57	10	10	32
85°	0	0	0	0	0	1
90°	0	0	0	0	0	

TEST NUMBER: P#  
 CATALOG NUMBER: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7
2.5°	3613.8	3655.1	3660.4	3634.4	3624.1	3608.7	3644.8	3619.0	3629.4	3619.0	3613.8
5°	3567.4	3613.8	3619.0	3619.0	3608.7	3603.4	3619.0	3613.8	3608.7	3598.4	3613.8
7.5°	3546.7	3572.4	3598.4	3567.4	3582.8	3577.7	3613.8	3598.4	3593.1	3593.1	3582.8
10°	3557.0	3551.8	3572.4	3541.4	3551.8	3541.4	3572.4	3572.4	3562.1	3551.8	3546.7
12.5°	3474.1	3515.5	3515.5	3510.4	3500.1	3484.5	3515.5	3536.4	3505.1	3505.1	3500.1
15°	3427.7	3438.1	3443.1	3443.1	3438.1	3448.4	3463.8	3443.1	3448.4	3422.5	3432.8
17.5°	3376.0	3355.4	3370.8	3360.4	3365.7	3376.0	3396.7	3396.7	3365.7	3360.4	3370.8
20°	3257.1	3319.1	3324.4	3293.4	3298.4	3298.4	3334.7	3303.7	3324.4	3298.4	3308.8
22.5°	3200.1	3241.5	3246.7	3205.4	3231.1	3200.1	3236.4	3189.8	3241.5	3205.4	3220.8
25°	3127.8	3122.7	3138.1	3117.4	3122.7	3122.7	3148.5	3127.8	3143.4	3122.7	3127.8
27.5°	3009.0	3050.4	3045.1	3024.4	3034.8	3029.7	3081.4	3024.4	3055.4	3029.7	3040.0
30°	2905.5	2941.7	2931.4	2910.7	2910.7	2895.1	2952.1	2936.5	2931.4	2931.4	2926.1
32.5°	2802.1	2807.4	2797.0	2802.1	2807.4	2786.7	2833.1	2812.4	2807.4	2812.4	2817.7
35°	2662.5	2662.5	2672.8	2657.4	2678.1	2678.1	2719.4	2693.5	2688.4	2672.8	2688.4
37.5°	2538.4	2523.0	2528.1	2528.1	2538.4	2548.8	2569.4	2559.1	2559.1	2543.7	2554.0
40°	2373.0	2362.7	2378.1	2378.1	2393.7	2393.7	2414.4	2404.0	2419.5	2419.5	2419.5
42.5°	2228.3	2228.3	2218.0	2233.4	2238.7	2233.4	2269.7	2264.4	2269.7	2259.3	2264.4
45°	2073.1	2073.1	2062.8	2057.7	2083.4	2078.4	2119.7	2104.1	2124.8	2114.4	2119.7
47.5°	1861.1	1887.0	1871.4	1887.0	1918.1	1923.3	1949.1	1938.7	1959.4	1944.0	1964.7
50°	1659.6	1659.6	1675.1	1695.7	1726.7	1732.0	1763.0	1783.7	1794.0	1799.1	1804.4
52.5°	1447.7	1442.4	1458.0	1483.7	1509.7	1530.3	1561.4	1592.4	1613.0	1644.0	1628.4
55°	1199.4	1209.7	1225.3	1256.3	1297.7	1323.4	1349.4	1390.7	1427.0	1442.4	1473.4
57.5°	987.4	977.1	987.4	1028.7	1075.4	1096.0	1132.3	1173.7	1225.3	1256.3	1266.7
60°	765.1	770.3	780.7	817.0	853.0	884.0	899.6	966.7	1013.3	1044.3	1065.0
62.5°	563.6	574.0	584.3	615.3	651.4	677.3	703.1	760.0	801.3	832.4	853.0
65°	393.0	398.0	413.6	429.0	465.3	491.1	511.7	558.4	599.7	625.6	641.0
67.5°	243.0	248.1	258.4	279.3	305.0	325.7	346.4	377.4	413.6	439.4	444.7
70°	124.0	129.3	134.4	150.0	170.6	181.0	196.4	222.3	248.1	268.7	279.3
72.5°	41.3	41.3	46.6	56.9	67.3	77.6	82.7	108.6	129.3	139.6	144.7
75°	10.3	10.3	10.3	10.3	10.3	15.6	15.6	31.0	41.3	51.7	56.9
77.5°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	10.3	10.3
80°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P#  
 CATALOG NUMBER: FLDSQ4C75D010 FEU4C759027 F4LC-CSSQ-MW

**CANDELA DISTRIBUTION (continued):**

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°
0°	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7	3639.7
2.5°	3639.7	3629.4	3624.1	3629.4	3629.4	3624.1	3639.7	3660.4	3686.1	3619.0
5°	3634.4	3624.1	3634.4	3603.4	3619.0	3608.7	3629.4	3624.1	3644.8	3624.1
7.5°	3619.0	3598.4	3603.4	3588.0	3608.7	3582.8	3598.4	3629.4	3608.7	3577.7
10°	3567.4	3557.0	3593.1	3541.4	3531.1	3551.8	3593.1	3562.1	3551.8	3562.1
12.5°	3515.5	3515.5	3531.1	3489.7	3494.8	3505.1	3525.8	3505.1	3515.5	3541.4
15°	3458.7	3448.4	3474.1	3443.1	3438.1	3427.7	3448.4	3448.4	3458.7	3443.1
17.5°	3391.4	3376.0	3376.0	3365.7	3360.4	3386.4	3396.7	3401.8	3407.1	3386.4
20°	3308.8	3303.7	3319.1	3303.7	3308.8	3314.0	3314.0	3303.7	3350.1	3293.4
22.5°	3220.8	3236.4	3215.7	3205.4	3215.7	3226.1	3226.1	3231.1	3220.8	3210.5
25°	3133.0	3143.4	3148.5	3117.4	3133.0	3117.4	3153.7	3158.8	3138.1	3148.5
27.5°	3055.4	3040.0	3034.8	3014.1	3024.4	3019.4	3024.4	3024.4	3055.4	3014.1
30°	2936.5	2921.1	2926.1	2910.7	2915.8	2910.7	2915.8	2915.8	2936.5	2931.4
32.5°	2822.8	2807.4	2812.4	2797.0	2797.0	2802.1	2791.8	2791.8	2807.4	2797.0
35°	2714.1	2678.1	2683.1	2678.1	2683.1	2662.5	2662.5	2657.4	2667.7	2641.8
37.5°	2559.1	2543.7	2538.4	2533.4	2538.4	2528.1	2538.4	2523.0	2538.4	2517.7
40°	2419.5	2409.1	2414.4	2383.4	2383.4	2388.4	2378.1	2373.0	2378.1	2398.8
42.5°	2280.0	2259.3	2249.0	2238.7	2243.7	2228.3	2223.1	2212.7	2223.1	2202.4
45°	2114.4	2114.4	2109.4	2083.4	2088.7	2088.7	2068.0	2047.4	2052.4	2052.4
47.5°	1964.7	1954.3	1949.1	1923.3	1918.1	1913.0	1892.1	1876.7	1876.7	1861.1
50°	1799.1	1788.7	1773.3	1747.4	1737.1	1706.1	1690.7	1670.0	1649.3	1649.3
52.5°	1644.0	1607.8	1587.1	1545.8	1530.3	1514.7	1473.4	1458.0	1442.4	1427.0
55°	1458.0	1427.0	1385.6	1339.0	1318.4	1292.4	1251.1	1220.1	1199.4	1204.7
57.5°	1277.0	1225.3	1184.0	1122.0	1096.0	1080.4	1039.1	997.7	977.1	977.1
60°	1054.7	1013.3	961.7	904.7	884.0	858.3	806.4	780.7	765.1	749.7
62.5°	842.7	811.7	765.1	692.7	677.3	651.4	615.3	584.3	568.7	568.7
65°	630.7	599.7	558.4	506.7	486.0	465.3	434.3	403.3	387.7	382.6
67.5°	444.7	408.4	372.3	331.0	315.4	305.0	274.0	253.3	243.0	237.7
70°	268.7	248.1	222.3	191.3	175.7	165.4	144.7	129.3	124.0	119.0
72.5°	139.6	124.0	103.4	82.7	72.4	62.0	51.7	41.3	36.3	36.3
75°	51.7	41.3	25.9	15.6	10.3	10.3	10.3	10.3	10.3	10.3
77.5°	10.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3
80°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)