

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P203413

Luminaire Tested: **MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI**

Issue Date: 08/03/2023



Test Information

Test Method: LM-79-08
Report Number: P203413
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)
Test Lab: INNOVATION CENTER-P3
Issue Date: 08/03/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI
Description: 6 INCH FAIL-SAFE MRI REMOTE DRIVER LED DOWNLIGHT WITH 3500K, 90 CRI
LEDS, 6LBNLI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 831.0 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.57
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.75
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P203413
CATALOG NUMBER: MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI

Luminous Intensity Polar Plot

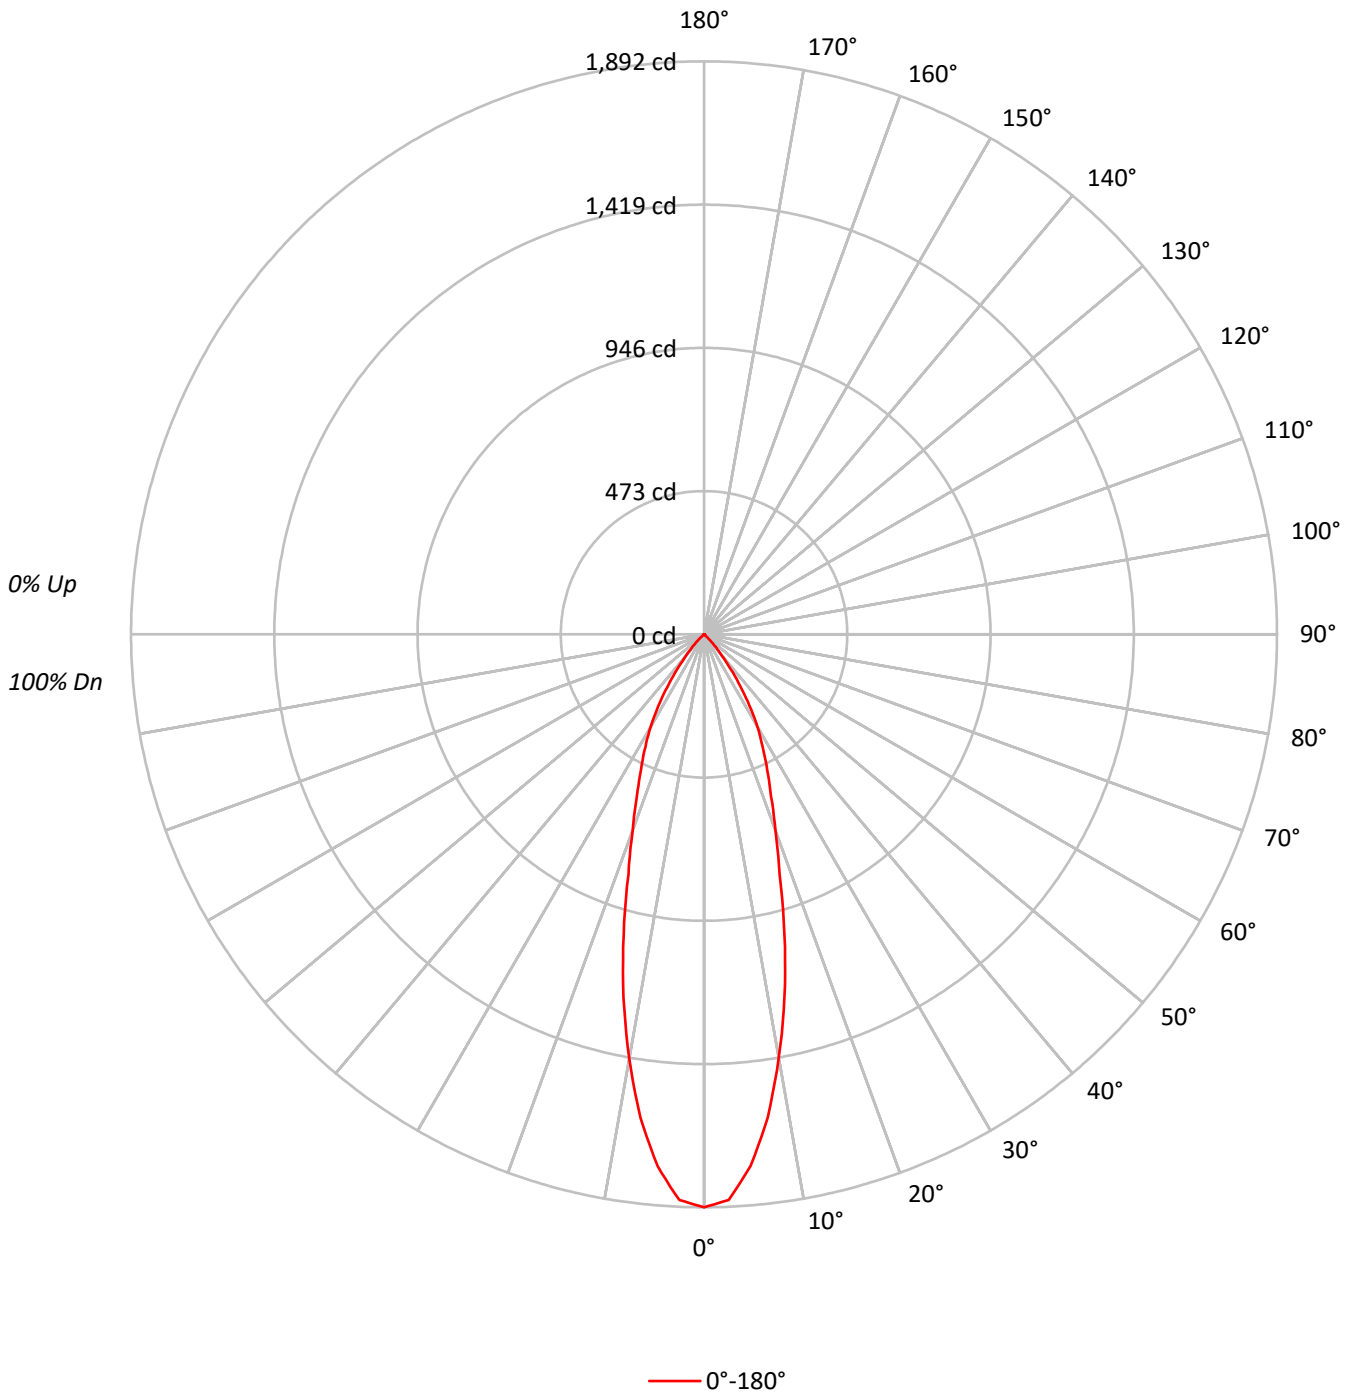



TEST NUMBER: P203413

CATALOG NUMBER: MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	96	96	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	91	91	91	89
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	86	86	86	85
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	81	81	81	80
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	77	77	77	76
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	73	73	73	72
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	69	69	69	68
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	66	66	66	65
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	63	63	63	62
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	60	60	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	103720
5°	96995
10°	79107
15°	58213
20°	40125
25°	29790
30°	22377
35°	13953
40°	6770
45°	2326
50°	307
55°	229
60°	132
65°	156
70°	192
75°	0
80°	0
85°	0



TEST NUMBER: P203413
 CATALOG NUMBER: MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.3	18.9
10°-20°	282.4	34.0
20°-30°	228.3	27.5
30°-40°	131.5	15.8
40°-50°	27.8	3.3
50°-60°	2.4	0.3
60°-70°	1.2	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	667.9	80.4
0°-40°	799.5	96.2
0°-60°	829.7	99.8
0°-90°	831.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	831.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1892	
5°	1763	157
15°	1026	282
25°	492	228
35°	208	132
45°	30	28
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203413
CATALOG NUMBER: MRI-DRV-FLD6C-10-L935 F6LC-N-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1892.0
2.5°	1869.3
5°	1762.6
7.5°	1609.2
10°	1421.1
12.5°	1228.2
15°	1025.7
17.5°	830.4
20°	687.8
22.5°	578.7
25°	492.5
27.5°	419.4
30°	353.5
32.5°	280.4
35°	208.5
37.5°	145.0
40°	94.6
42.5°	57.5
45°	30.0
47.5°	12.0
50°	3.6
52.5°	3.6
55°	2.4
57.5°	2.4
60°	1.2
62.5°	1.2
65°	1.2
67.5°	1.2
70°	1.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)