

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P204013

Luminaire Tested: **MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI**

Issue Date: 08/03/2023



Test Information

Test Method: LM-79-08
Report Number: P204013
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)
Test Lab: INNOVATION CENTER-P3
Issue Date: 08/03/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI
Description: 6 INCH FAIL-SAFE MRI REMOTE DRIVER LED DOWNLIGHT WITH 3500K, 90 CRI
LEDS, 6LBNLI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1642.1 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P204013
CATALOG NUMBER: MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI

Luminous Intensity Polar Plot

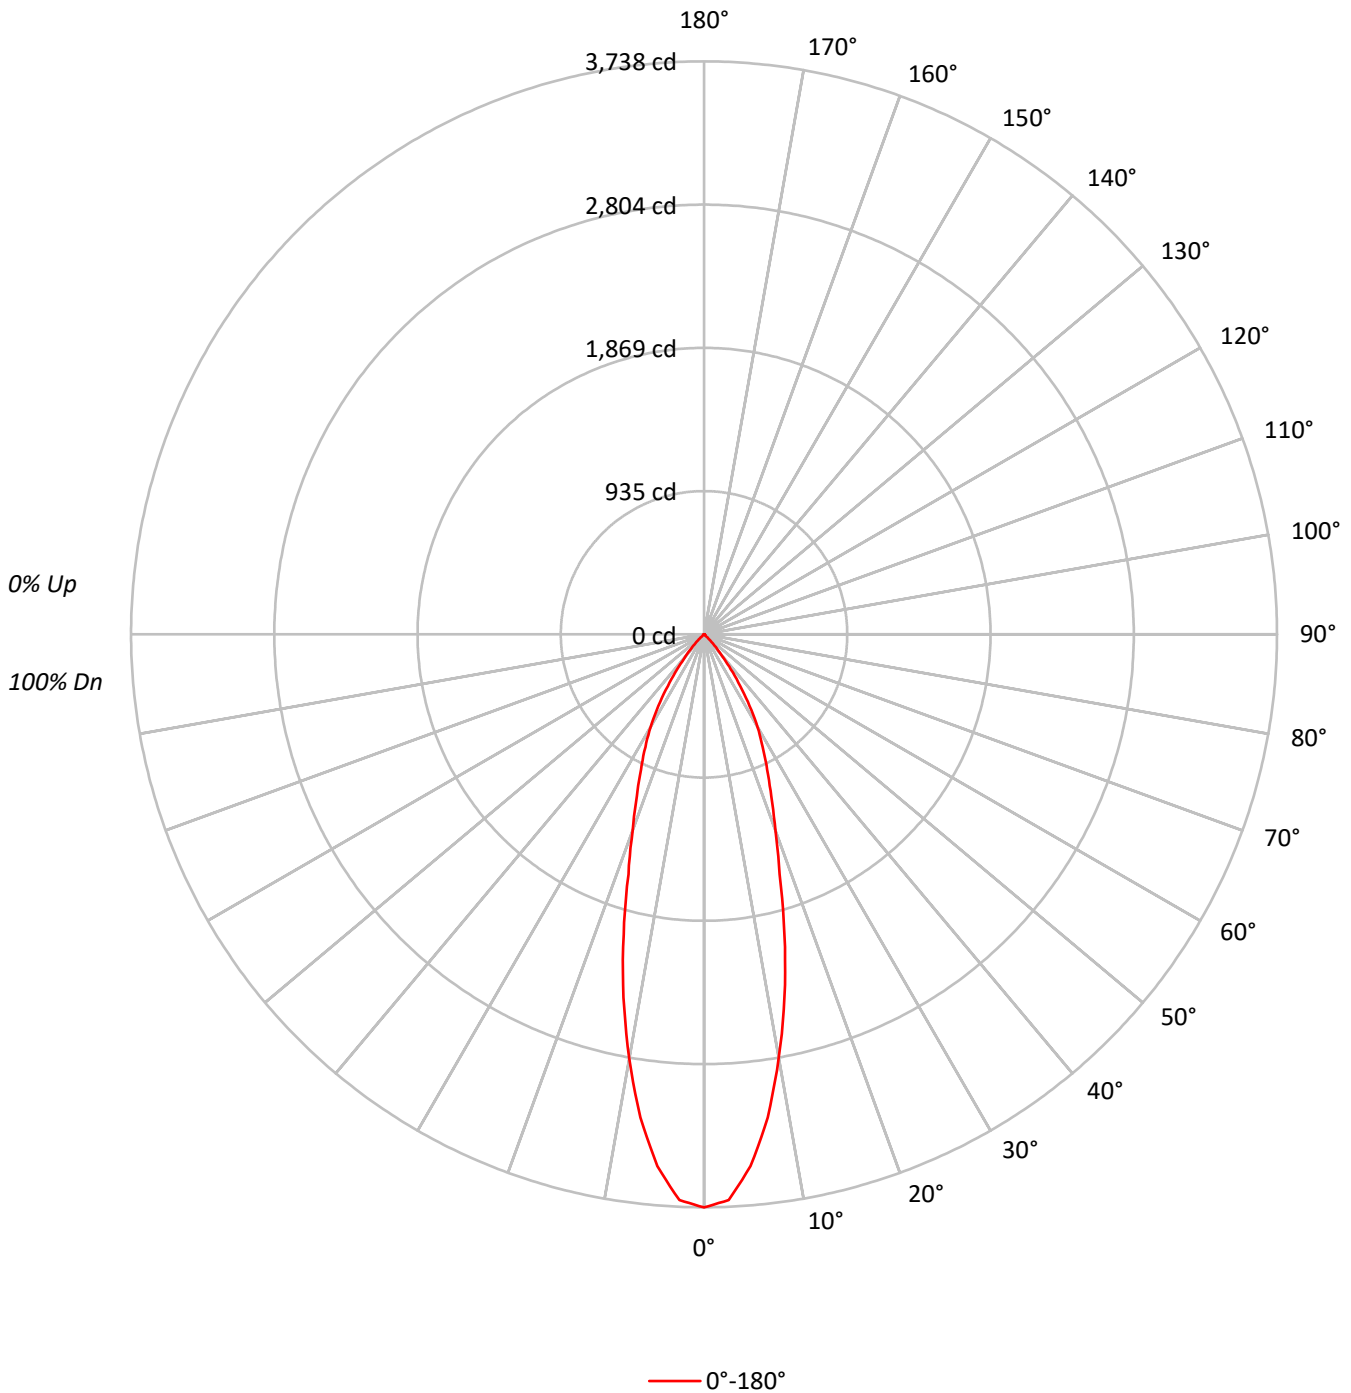



TEST NUMBER: P204013
 CATALOG NUMBER: MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95		
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89		
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85		
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80		
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76		
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72		
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68		
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65		
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62		
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	204940
5°	191657
10°	156310
15°	115023
20°	79282
25°	58860
30°	44209
35°	27572
40°	13382
45°	4590
50°	606
55°	459
60°	263
65°	311
70°	385
75°	0
80°	0
85°	0



TEST NUMBER: P204013
 CATALOG NUMBER: MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	310.8	18.9
10°-20°	557.9	34.0
20°-30°	451.1	27.5
30°-40°	259.9	15.8
40°-50°	54.9	3.3
50°-60°	4.8	0.3
60°-70°	2.4	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1319.8	80.4
0°-40°	1579.7	96.2
0°-60°	1639.4	99.8
0°-90°	1642.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1642.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3738	
5°	3483	311
15°	2027	558
25°	973	451
35°	412	260
45°	59	55
55°	5	5
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P204013
CATALOG NUMBER: MRI-DRV-FLD6C-20-L935 F6LC-N-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3738.4
2.5°	3693.5
5°	3482.8
7.5°	3179.7
10°	2808.0
12.5°	2426.8
15°	2026.7
17.5°	1640.8
20°	1359.0
22.5°	1143.6
25°	973.1
27.5°	828.7
30°	698.4
32.5°	554.0
35°	412.0
37.5°	286.5
40°	187.0
42.5°	113.7
45°	59.2
47.5°	23.7
50°	7.1
52.5°	7.1
55°	4.8
57.5°	4.8
60°	2.4
62.5°	2.4
65°	2.4
67.5°	2.4
70°	2.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)