

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P204193

Luminaire Tested: **MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI**

Issue Date: 08/03/2023



Test Information

Test Method: LM-79-08
Report Number: P204193
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205310)
Test Lab: INNOVATION CENTER-P3
Issue Date: 08/03/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI
Description: 6 INCH FAIL-SAFE MRI REMOTE DRIVER LED DOWNLIGHT WITH 2700K, 90 CRI
LEDS, 6LBNLI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1956.0 lumens
Efficiency: N/A
Efficacy: 62.1 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.58
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P204193
CATALOG NUMBER: MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI

Luminous Intensity Polar Plot

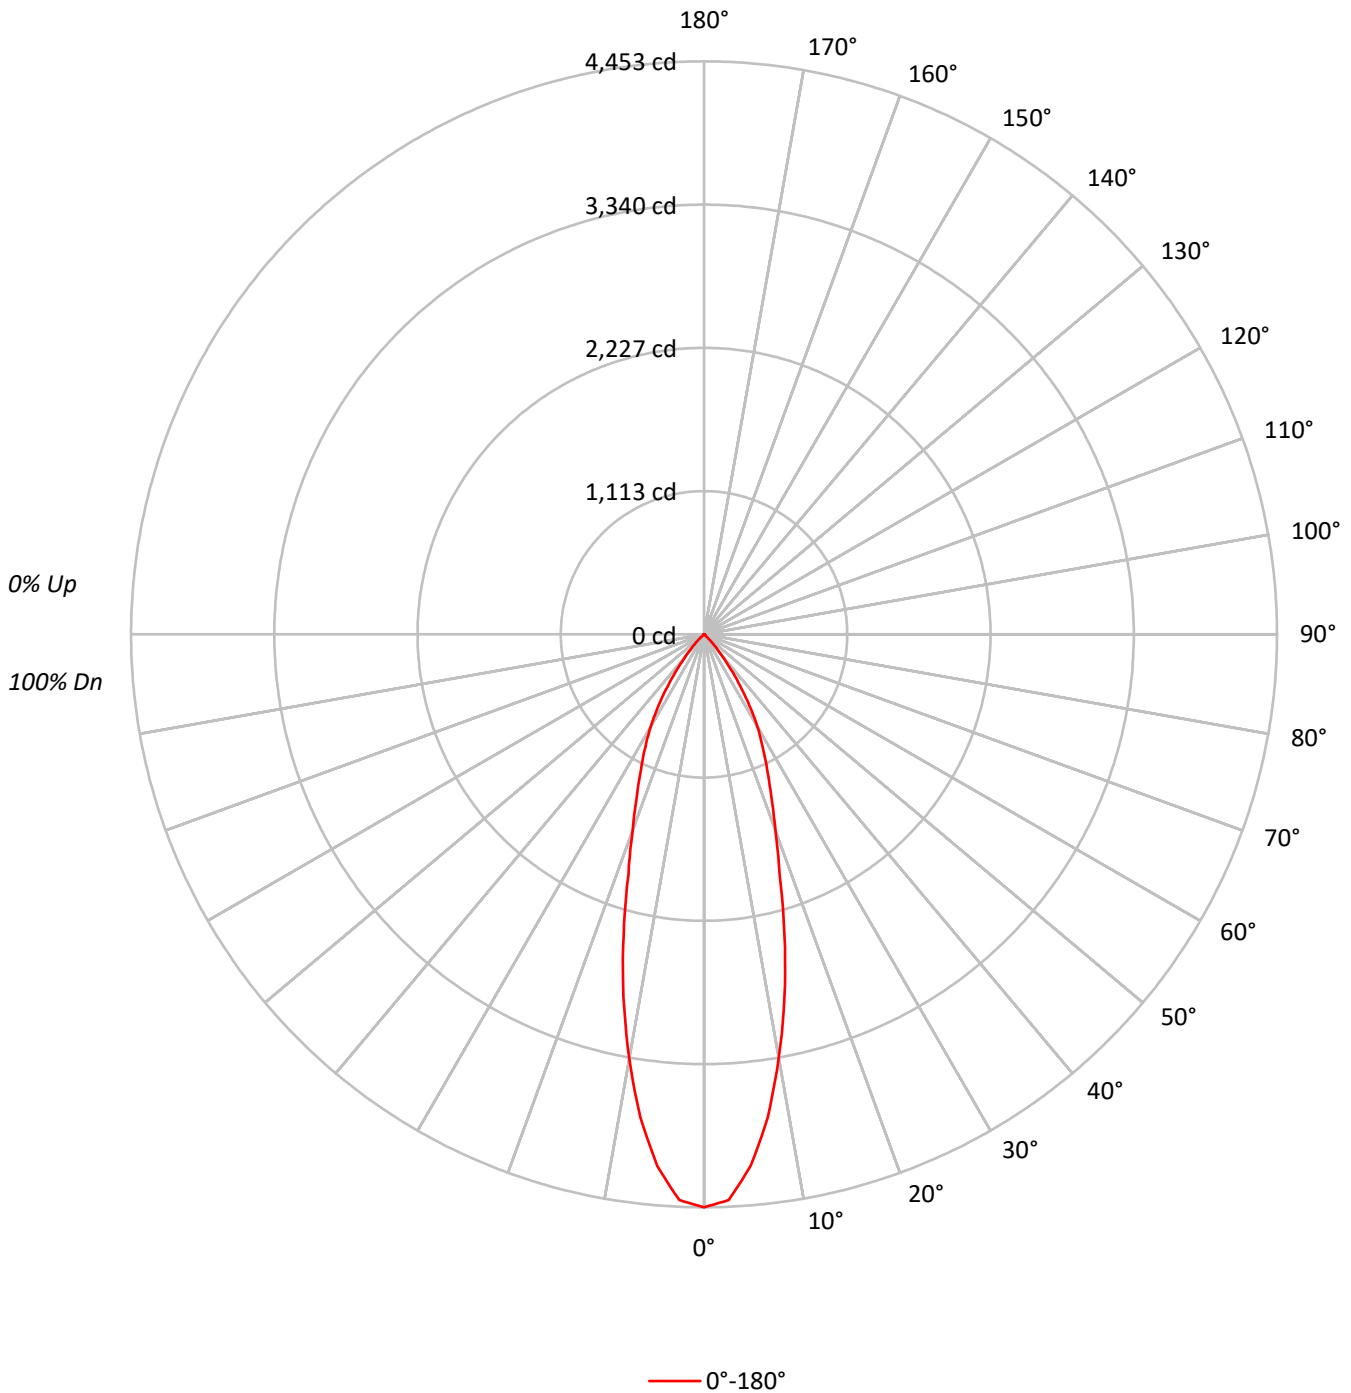



TEST NUMBER: P204193

CATALOG NUMBER: MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89	89	89	89
3	105	99	94	91	103	97	93	90	95	91	89	93	90	87	90	88	86	85	85	85	85
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80	80	80	80
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76	76	76	76
6	92	84	79	75	90	83	78	75	82	77	74	80	76	74	79	76	73	72	72	72	72
7	88	80	74	71	87	79	74	71	78	73	70	77	73	70	76	72	69	68	68	68	68
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	73	69	66	65	65	65	65
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62	62	62	62
10	78	69	64	61	77	69	64	61	68	64	61	67	63	60	67	63	60	59	59	59	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	244131
5°	228307
10°	186202
15°	137021
20°	94444
25°	70111
30°	52666
35°	32839
40°	15944
45°	5466
50°	716
55°	545
60°	307
65°	363
70°	449
75°	0
80°	0
85°	0



TEST NUMBER: P204193
 CATALOG NUMBER: MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	370.3	18.9
10°-20°	664.6	34.0
20°-30°	537.3	27.5
30°-40°	309.5	15.8
40°-50°	65.4	3.3
50°-60°	5.6	0.3
60°-70°	2.8	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1572.2	80.4
0°-40°	1881.7	96.2
0°-60°	1952.8	99.8
0°-90°	1956.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1956.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4453	
5°	4149	370
15°	2414	665
25°	1159	537
35°	491	310
45°	70	65
55°	6	6
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P204193
CATALOG NUMBER: MRI-DRV-FLD6C-25-L927 F6LC-N-X-LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4453.3
2.5°	4399.8
5°	4148.8
7.5°	3787.8
10°	3345.0
12.5°	2890.9
15°	2414.3
17.5°	1954.5
20°	1618.9
22.5°	1362.3
25°	1159.1
27.5°	987.2
30°	832.0
32.5°	660.0
35°	490.7
37.5°	341.2
40°	222.8
42.5°	135.4
45°	70.5
47.5°	28.2
50°	8.4
52.5°	8.4
55°	5.7
57.5°	5.7
60°	2.8
62.5°	2.8
65°	2.8
67.5°	2.8
70°	2.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)