

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P308427

Luminaire Tested: **22FCZ2-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P308427  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-24)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 22FCZ2-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K  
Description: 2'X2' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.08" ACRYLIC SHEET  
Light Source: (168) 3000K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment: 

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1791.0 lumens  
Efficiency: N/A  
Efficacy: 77.9 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P308427

CATALOG NUMBER: 22FCZ2-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K

### Luminous Intensity Polar Plot

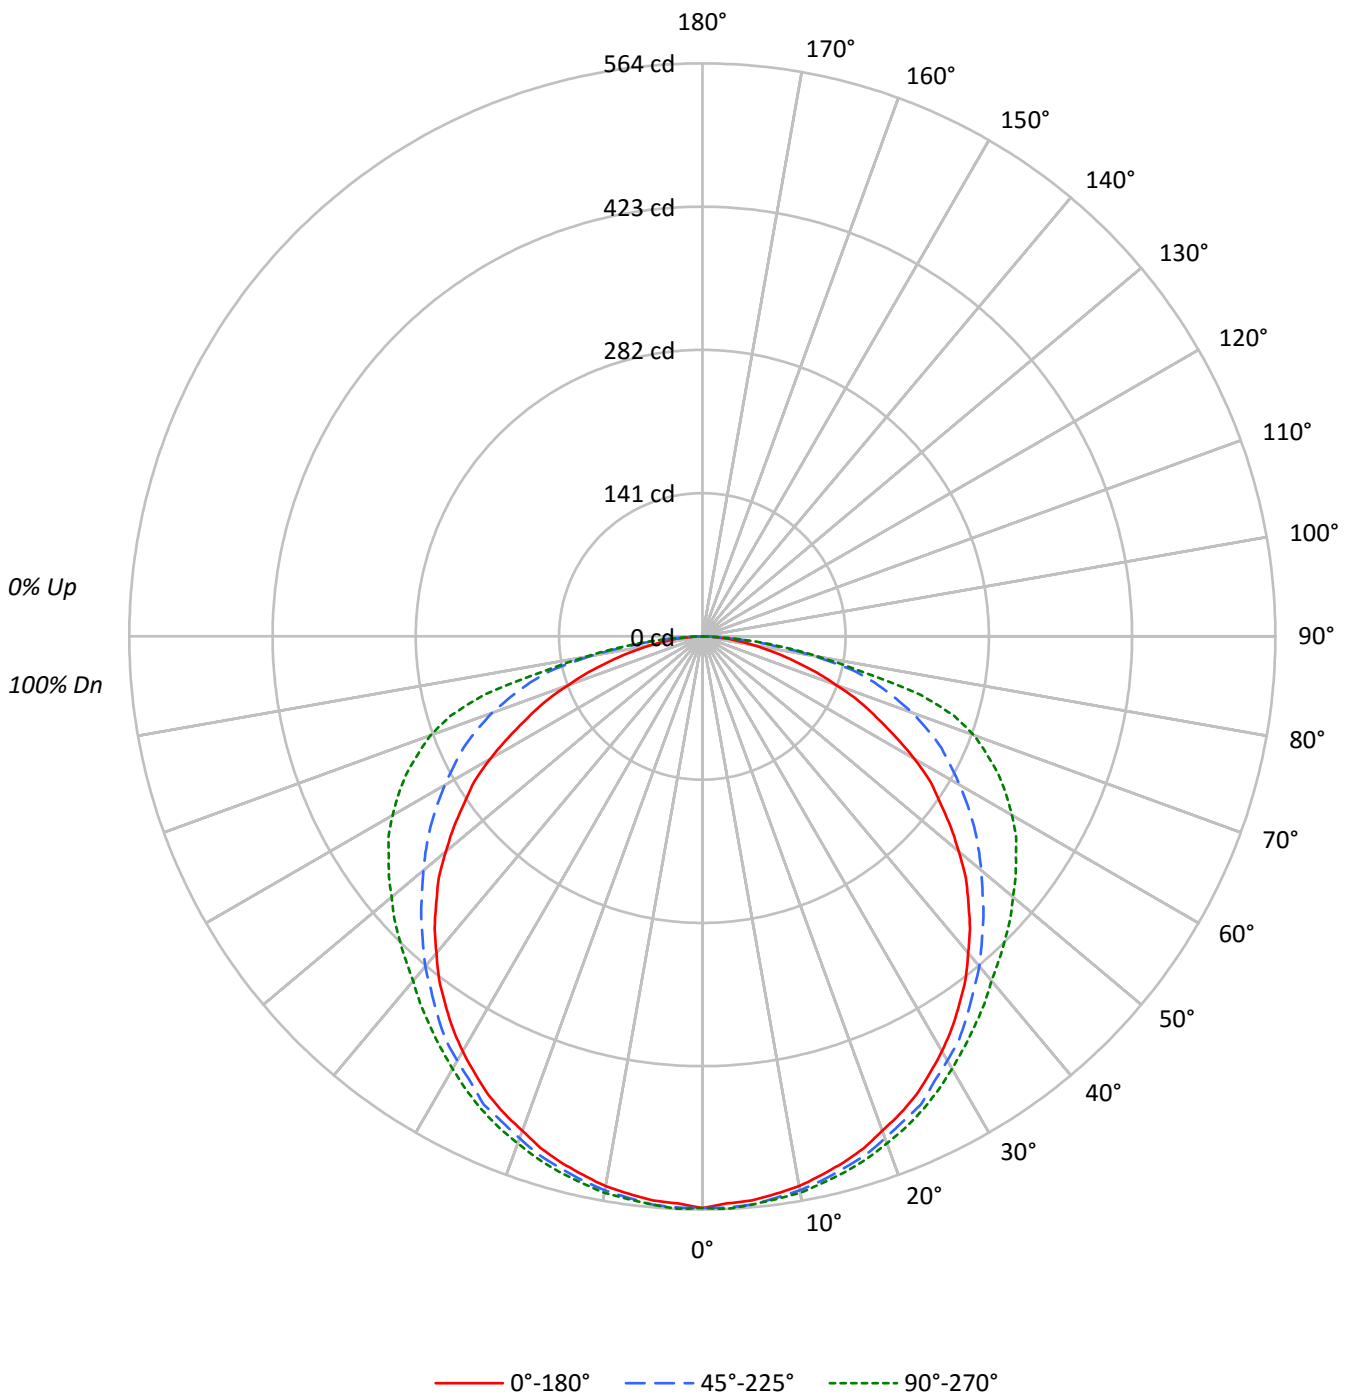



TEST NUMBER: P308427

CATALOG NUMBER: 22FCZ2-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	92	89	92	89	86	88	86	84	82
2	97	88	81	75	95	86	80	74	83	77	72	80	75	71	76	72	69	67
3	88	77	68	61	86	75	67	61	72	65	60	70	64	59	67	62	58	55
4	80	68	59	51	78	66	58	51	64	56	50	61	55	50	59	54	49	47
5	74	60	51	44	72	59	50	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	44	38	51	43	38	50	43	37	48	42	37	35
7	63	49	40	33	61	48	39	33	47	39	33	45	38	33	44	37	33	31
8	59	45	36	30	57	44	35	30	43	35	29	41	34	29	40	34	29	27
9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1514	1514	1514
5°	1505	1516	1516
10°	1501	1512	1519
15°	1494	1509	1520
20°	1483	1505	1521
25°	1479	1510	1526
30°	1466	1498	1527
35°	1450	1493	1536
40°	1430	1490	1555
45°	1409	1489	1604
50°	1379	1500	1671
55°	1341	1533	1768
60°	1298	1574	1893
65°	1208	1653	2047
70°	1109	1731	2239
75°	972	1822	2315
80°	837	1736	1818
85°	732	1260	1383



TEST NUMBER: P308427

CATALOG NUMBER: 22FCZ2-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	53.2	3.0
10°-20°	152.8	8.5
20°-30°	233.1	13.0
30°-40°	284.6	15.9
40°-50°	304.4	17.0
50°-60°	293.8	16.4
60°-70°	252.9	14.1
70°-80°	171.1	9.6
80°-90°	45.2	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	439.1	24.5
0°-40°	723.8	40.4
0°-60°	1321.9	73.8
0°-90°	1791.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1791.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	563	563	563	563	563	
5°	557	559	561	561	561	53
15°	536	538	542	544	546	151
25°	498	501	509	511	514	229
35°	441	445	454	464	468	276
45°	370	377	391	411	422	286
55°	286	295	327	360	377	256
65°	190	208	260	300	322	189
75°	94	124	175	211	223	100
85°	24	33	41	42	45	27
90°	0	0	0	0	0	



TEST NUMBER: P308427

CATALOG NUMBER: 22FC22-29HE-UNV-L82765-RDP-CA08-W2A-U-5700K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	562.6	562.6	562.6	562.6	562.6
2.5°	558.6	559.9	562.6	562.6	563.9
5°	557.3	558.6	561.3	561.3	561.3
7.5°	553.4	554.7	557.3	558.6	558.6
10°	549.4	550.7	553.4	554.7	556.0
12.5°	542.8	544.1	548.1	550.7	550.7
15°	536.2	537.6	541.5	544.1	545.5
17.5°	528.3	531.0	534.9	537.6	538.9
20°	517.8	520.4	525.7	529.6	531.0
22.5°	508.6	511.2	516.5	520.4	523.1
25°	498.0	500.7	508.6	511.2	513.8
27.5°	484.9	487.5	494.1	499.3	503.3
30°	471.7	474.3	482.2	488.8	491.4
32.5°	457.2	461.1	470.4	475.6	479.6
35°	441.4	445.3	454.5	463.8	467.7
37.5°	425.6	429.5	438.7	450.6	455.9
40°	407.1	412.4	424.2	440.1	442.7
42.5°	390.0	396.6	407.1	425.6	432.1
45°	370.2	376.8	391.3	411.1	421.6
47.5°	351.8	358.4	374.2	397.9	411.1
50°	329.4	338.6	358.4	386.0	399.2
52.5°	308.3	316.2	342.6	372.9	388.7
55°	285.9	295.1	326.7	359.7	376.8
57.5°	266.1	274.0	309.6	346.5	366.3
60°	241.1	251.6	292.5	332.0	351.8
62.5°	214.8	230.6	275.4	316.2	337.3
65°	189.7	208.2	259.6	300.4	321.5
67.5°	167.3	187.1	239.8	283.3	303.0
70°	141.0	166.0	220.0	262.2	284.6
72.5°	117.3	144.9	197.6	239.8	259.6
75°	93.5	123.8	175.2	210.8	222.7
77.5°	72.5	101.4	150.2	160.7	162.1
80°	54.0	80.4	112.0	113.3	117.3
82.5°	36.9	56.7	72.5	79.1	80.4
85°	23.7	32.9	40.8	42.2	44.8
87.5°	10.5	11.9	14.5	13.2	13.2
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)