

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309294

Luminaire Tested: **24FCZ2-35-UNV-L82765-HRP-CP125-W2A-U-3000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309294
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-35-UNV-L82765-HRP-CP125-W2A-U-3000K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.125" POLYCARB SHEET
Light Source: (168) 3000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2276.0 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 27.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309294

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-HRP-CP125-W2A-U-3000K

Luminous Intensity Polar Plot

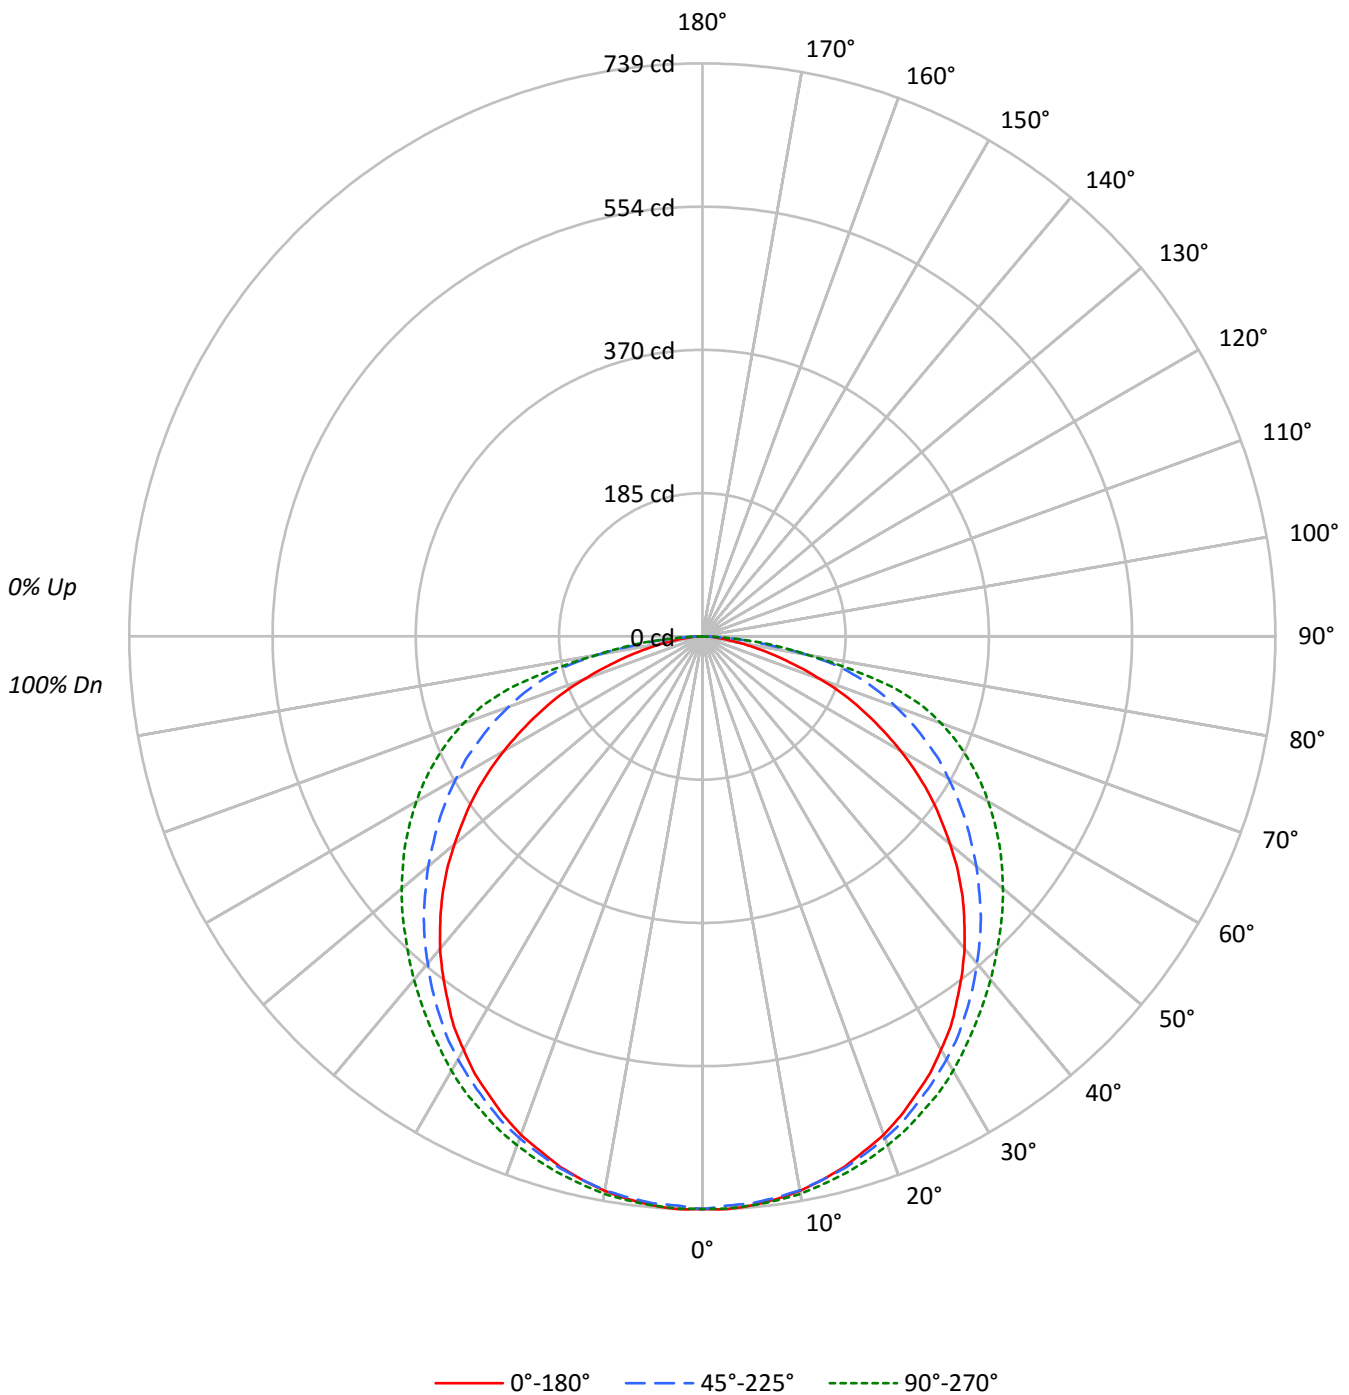



TEST NUMBER: P309294

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-HRP-CP125-W2A-U-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	994	994	994
5°	995	991	995
10°	992	991	997
15°	986	989	998
20°	980	986	1000
25°	968	982	1001
30°	956	978	1005
35°	941	974	1006
40°	924	967	1016
45°	903	966	1032
50°	873	965	1059
55°	843	972	1097
60°	795	987	1146
65°	734	1010	1210
70°	641	1046	1290
75°	520	1099	1332
80°	384	1078	1078
85°	295	795	897



TEST NUMBER: P309294

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-HRP-CP125-W2A-U-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.0	3.1
10°-20°	200.9	8.8
20°-30°	305.8	13.4
30°-40°	371.3	16.3
40°-50°	392.3	17.2
50°-60°	370.2	16.3
60°-70°	307.8	13.5
70°-80°	202.5	8.9
80°-90°	55.2	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	576.7	25.3
0°-40°	948.0	41.7
0°-60°	1710.5	75.2
0°-90°	2276.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2276.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	738	738	738	738	738	
5°	736	736	734	736	736	70
15°	708	709	710	716	716	200
25°	652	656	661	673	675	301
35°	573	579	593	608	613	358
45°	474	484	508	533	542	365
55°	359	374	414	454	468	320
65°	231	257	317	364	380	228
75°	100	146	212	251	256	108
85°	19	42	52	57	58	23
90°	0	0	0	0	0	



TEST NUMBER: P309294

CATALOG NUMBER: 24FC22-35-UNV-L82765-HRP-CP125-W2A-U-3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	738.4	738.4	738.4	738.4	738.4
2.5°	739.4	738.4	734.6	738.4	738.4
5°	736.5	736.5	733.7	736.5	736.5
7.5°	731.8	731.8	729.9	733.7	733.7
10°	726.1	726.1	725.1	729.9	729.9
12.5°	717.5	718.4	717.5	723.2	723.2
15°	708.0	708.9	709.9	716.5	716.5
17.5°	695.6	697.5	699.4	707.0	708.0
20°	684.1	685.1	688.9	697.5	698.4
22.5°	668.9	671.8	676.5	685.1	687.9
25°	651.7	655.6	661.3	672.7	674.6
27.5°	635.5	638.4	646.0	658.4	662.2
30°	615.5	620.3	629.8	642.2	647.0
32.5°	596.5	601.2	612.7	626.0	629.8
35°	572.7	579.3	592.7	607.9	612.7
37.5°	549.8	556.5	572.7	589.8	595.5
40°	526.0	533.6	550.7	570.8	578.4
42.5°	500.2	510.7	529.8	551.7	560.3
45°	474.5	484.0	507.9	532.6	542.2
47.5°	446.9	458.3	484.0	513.6	525.0
50°	417.3	431.6	461.2	493.6	506.0
52.5°	387.8	404.0	437.4	473.6	486.9
55°	359.2	374.5	414.5	453.6	467.8
57.5°	327.8	346.8	390.7	432.6	446.9
60°	295.4	316.3	366.8	410.7	425.9
62.5°	263.0	286.8	344.0	387.8	404.0
65°	230.6	257.3	317.3	364.0	380.2
67.5°	199.1	228.7	292.5	339.2	355.4
70°	162.9	200.1	265.8	311.6	327.8
72.5°	129.6	172.5	240.1	283.0	297.3
75°	100.0	145.8	211.5	250.6	256.3
77.5°	73.4	119.1	182.0	195.3	196.3
80°	49.5	95.3	139.1	137.2	139.1
82.5°	32.4	71.5	87.7	98.1	99.1
85°	19.1	41.9	51.5	57.2	58.1
87.5°	9.5	14.3	18.1	19.1	21.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)