

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309548

Luminaire Tested: **24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.08" ACRYLIC SHEET
Light Source: (168) 4000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3463.0 lumens
Efficiency: N/A
Efficacy: 80.2 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 43.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309548

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K

Luminous Intensity Polar Plot

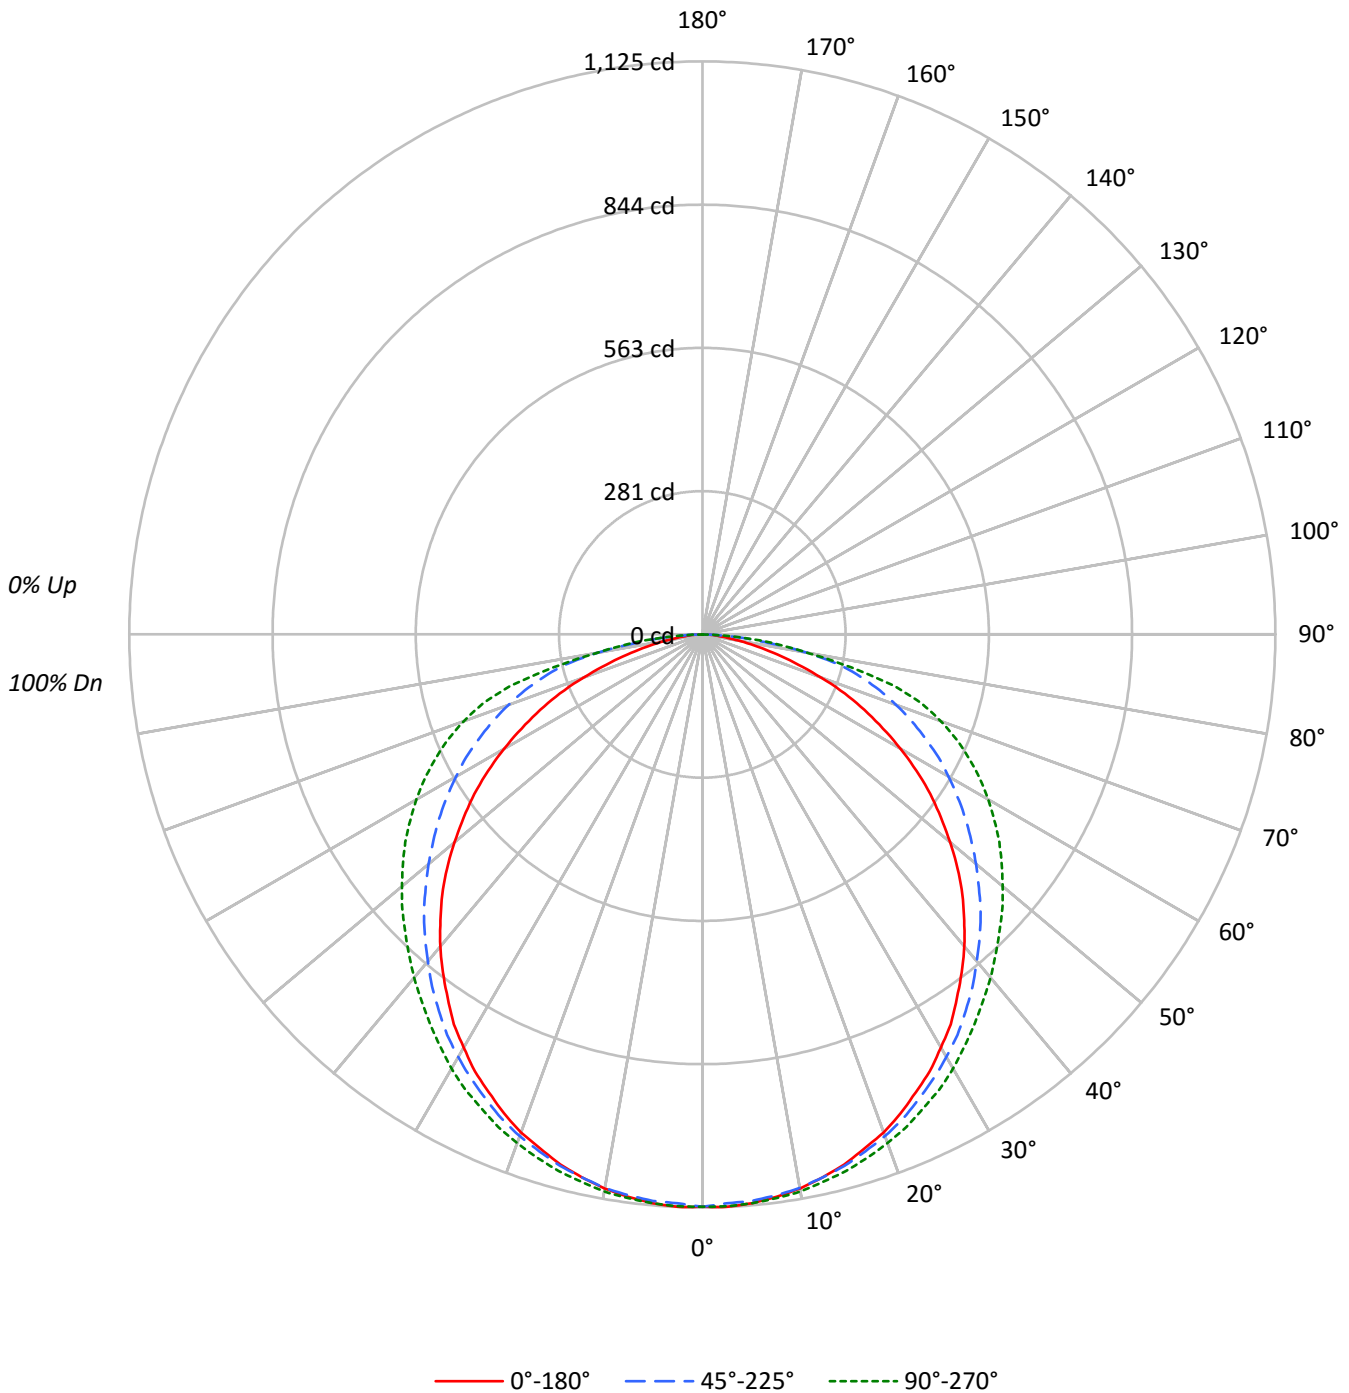



TEST NUMBER: P309548

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1512	1512	1512
5°	1514	1508	1514
10°	1509	1507	1517
15°	1500	1505	1519
20°	1490	1501	1522
25°	1472	1494	1524
30°	1455	1489	1529
35°	1431	1481	1531
40°	1406	1472	1546
45°	1374	1470	1570
50°	1329	1469	1611
55°	1282	1479	1670
60°	1209	1502	1744
65°	1117	1537	1842
70°	975	1591	1962
75°	791	1673	2027
80°	584	1640	1640
85°	448	1209	1365



TEST NUMBER: P309548

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.4	3.1
10°-20°	305.6	8.8
20°-30°	465.3	13.4
30°-40°	565.0	16.3
40°-50°	596.9	17.2
50°-60°	563.3	16.3
60°-70°	468.3	13.5
70°-80°	308.1	8.9
80°-90°	84.0	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	877.4	25.3
0°-40°	1442.4	41.7
0°-60°	2602.6	75.2
0°-90°	3463.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3463.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1124	1124	1124	1124	1124	
5°	1121	1121	1116	1121	1121	106
15°	1077	1079	1080	1090	1090	304
25°	992	997	1006	1024	1026	457
35°	871	882	902	925	932	545
45°	722	736	773	810	825	556
55°	547	570	631	690	712	487
65°	351	391	483	554	578	347
75°	152	222	322	381	390	164
85°	29	64	78	87	88	35
90°	0	0	0	0	0	



TEST NUMBER: P309548

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-HRP-CA08-W2A-U-4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1123.6	1123.6	1123.6	1123.6	1123.6
2.5°	1125.0	1123.6	1117.8	1123.6	1123.6
5°	1120.7	1120.7	1116.3	1120.7	1120.7
7.5°	1113.4	1113.4	1110.5	1116.3	1116.3
10°	1104.7	1104.7	1103.3	1110.5	1110.5
12.5°	1091.7	1093.1	1091.7	1100.4	1100.4
15°	1077.2	1078.6	1080.1	1090.2	1090.2
17.5°	1058.3	1061.2	1064.1	1075.7	1077.2
20°	1040.9	1042.4	1048.2	1061.2	1062.7
22.5°	1017.7	1022.1	1029.3	1042.4	1046.7
25°	991.6	997.4	1006.1	1023.5	1026.4
27.5°	967.0	971.3	982.9	1001.8	1007.6
30°	936.6	943.8	958.3	977.1	984.4
32.5°	907.6	914.8	932.2	952.5	958.3
35°	871.3	881.5	901.8	925.0	932.2
37.5°	836.5	846.7	871.3	897.4	906.1
40°	800.3	811.9	838.0	868.4	880.0
42.5°	761.1	777.1	806.1	839.4	852.5
45°	722.0	736.5	772.7	810.4	824.9
47.5°	679.9	697.3	736.5	781.4	798.8
50°	635.0	656.7	701.7	751.0	769.8
52.5°	590.1	614.7	665.4	720.5	740.8
55°	546.6	569.8	630.7	690.1	711.8
57.5°	498.7	527.7	594.4	658.2	679.9
60°	449.4	481.3	558.2	624.9	648.0
62.5°	400.1	436.4	523.4	590.1	614.7
65°	350.8	391.4	482.8	553.8	578.5
67.5°	303.0	347.9	445.1	516.1	540.8
70°	247.9	304.5	404.5	474.1	498.7
72.5°	197.2	262.4	365.3	430.6	452.3
75°	152.2	221.8	321.8	381.3	390.0
77.5°	111.6	181.2	276.9	297.2	298.7
80°	75.4	145.0	211.7	208.8	211.7
82.5°	49.3	108.7	133.4	149.3	150.8
85°	29.0	63.8	78.3	87.0	88.4
87.5°	14.5	21.7	27.5	29.0	31.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)