

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309634

Luminaire Tested: **24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309634
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.250"
POLYCARB SHEET
Light Source: (336) 6500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3734.0 lumens
Efficiency: N/A
Efficacy: 83.0 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 45
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309634

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K

Luminous Intensity Polar Plot

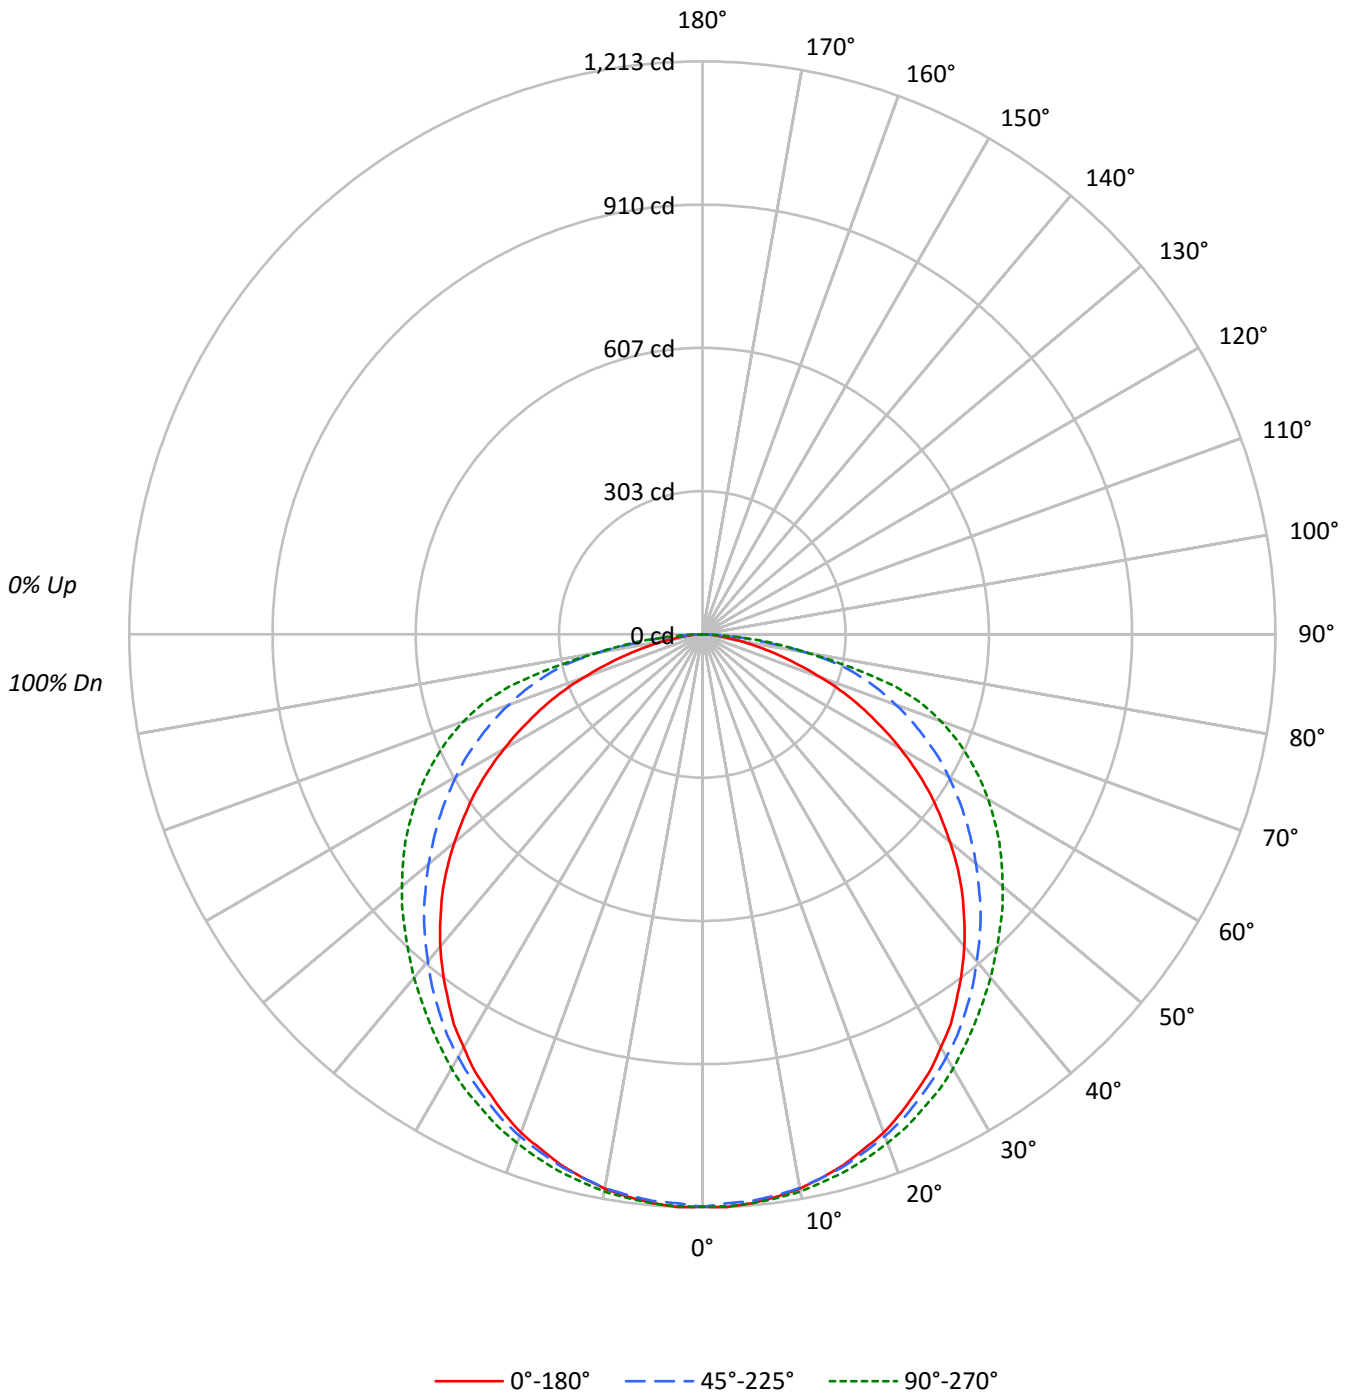



TEST NUMBER: P309634

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1630	1630	1630
5°	1632	1626	1632
10°	1627	1625	1636
15°	1618	1622	1637
20°	1607	1618	1641
25°	1587	1611	1643
30°	1569	1605	1649
35°	1543	1597	1651
40°	1516	1587	1667
45°	1481	1585	1693
50°	1433	1584	1738
55°	1382	1595	1800
60°	1304	1619	1880
65°	1204	1657	1986
70°	1052	1716	2115
75°	853	1804	2186
80°	630	1768	1768
85°	483	1303	1473



TEST NUMBER: P309634

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.8	3.1
10°-20°	329.6	8.8
20°-30°	501.7	13.4
30°-40°	609.2	16.3
40°-50°	643.6	17.2
50°-60°	607.3	16.3
60°-70°	505.0	13.5
70°-80°	332.2	8.9
80°-90°	90.6	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	946.1	25.3
0°-40°	1555.3	41.7
0°-60°	2806.2	75.2
0°-90°	3734.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3734.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1212	1212	1212	1212	1212	
5°	1208	1208	1204	1208	1208	115
15°	1162	1163	1165	1176	1176	328
25°	1069	1076	1085	1104	1107	493
35°	940	950	972	997	1005	588
45°	778	794	833	874	890	600
55°	589	614	680	744	768	525
65°	378	422	521	597	624	374
75°	164	239	347	411	420	177
85°	31	69	84	94	95	38
90°	0	0	0	0	0	



TEST NUMBER: P309634

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP250-W2A-U-6500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1211.5	1211.5	1211.5	1211.5	1211.5
2.5°	1213.1	1211.5	1205.2	1211.5	1211.5
5°	1208.4	1208.4	1203.7	1208.4	1208.4
7.5°	1200.6	1200.6	1197.4	1203.7	1203.7
10°	1191.2	1191.2	1189.6	1197.4	1197.4
12.5°	1177.1	1178.7	1177.1	1186.5	1186.5
15°	1161.5	1163.0	1164.6	1175.5	1175.5
17.5°	1141.2	1144.3	1147.4	1159.9	1161.5
20°	1122.4	1124.0	1130.2	1144.3	1145.8
22.5°	1097.4	1102.1	1109.9	1124.0	1128.6
25°	1069.2	1075.5	1084.9	1103.6	1106.8
27.5°	1042.7	1047.4	1059.9	1080.2	1086.4
30°	1009.8	1017.7	1033.3	1053.6	1061.4
32.5°	978.6	986.4	1005.2	1027.0	1033.3
35°	939.5	950.4	972.3	997.3	1005.2
37.5°	902.0	912.9	939.5	967.6	977.0
40°	862.9	875.4	903.5	936.4	948.9
42.5°	820.7	837.9	869.2	905.1	919.2
45°	778.5	794.1	833.2	873.8	889.5
47.5°	733.2	751.9	794.1	842.6	861.3
50°	684.7	708.1	756.6	809.8	830.1
52.5°	636.2	662.8	717.5	776.9	798.8
55°	589.3	614.3	680.0	744.1	767.5
57.5°	537.7	569.0	640.9	709.7	733.2
60°	484.6	519.0	601.8	673.7	698.8
62.5°	431.5	470.5	564.3	636.2	662.8
65°	378.3	422.1	520.6	597.2	623.7
67.5°	326.7	375.2	479.9	556.5	583.1
70°	267.3	328.3	436.1	511.2	537.7
72.5°	212.6	282.9	393.9	464.3	487.7
75°	164.1	239.2	347.0	411.1	420.5
77.5°	120.4	195.4	298.6	320.5	322.0
80°	81.3	156.3	228.2	225.1	228.2
82.5°	53.1	117.2	143.8	161.0	162.6
85°	31.3	68.8	84.4	93.8	95.4
87.5°	15.6	23.4	29.7	31.3	34.4
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)