

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309659

Luminaire Tested: **24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P309659  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K  
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.125" POLYCARB SHEET  
Light Source: (336) 5500K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4250.0 lumens  
Efficiency: N/A  
Efficacy: 86.9 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct


Input Watts (W): 48.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P309659

CATALOG NUMBER: 24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K

### Luminous Intensity Polar Plot

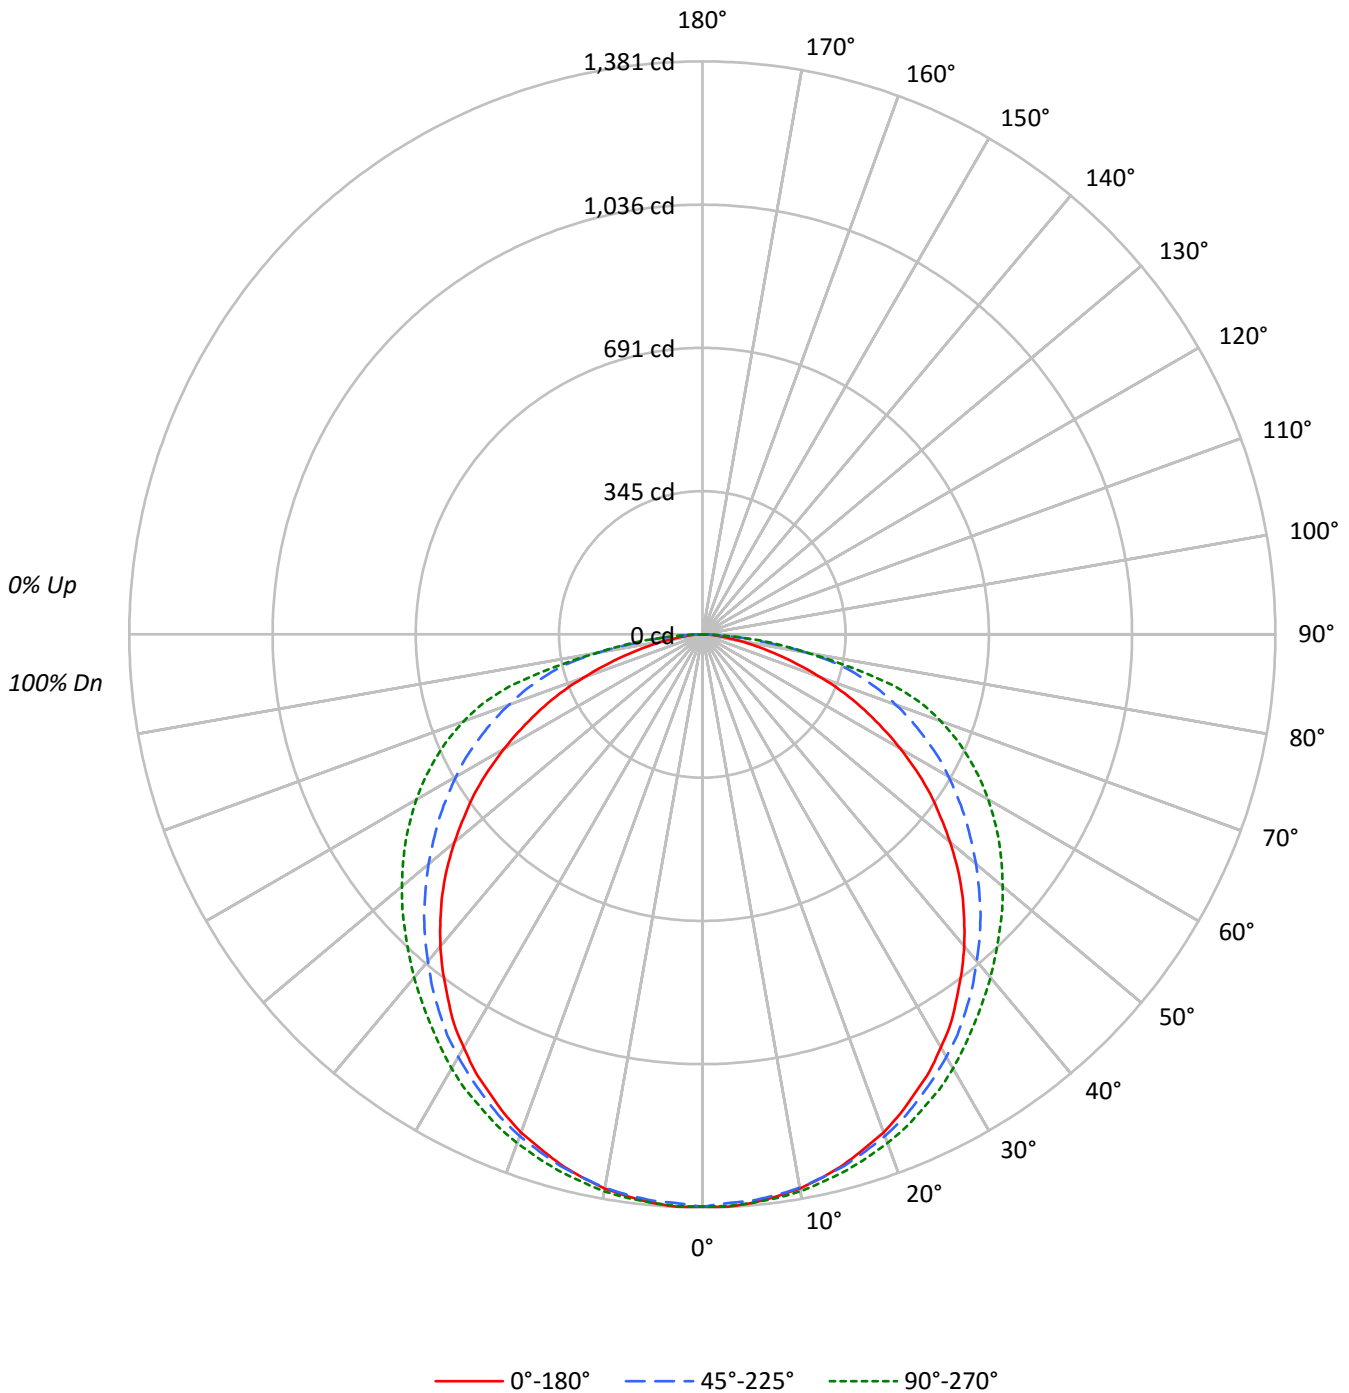



TEST NUMBER: P309659

CATALOG NUMBER: 24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1855	1855	1855
5°	1858	1850	1858
10°	1852	1850	1862
15°	1841	1846	1864
20°	1829	1842	1867
25°	1807	1833	1870
30°	1786	1827	1877
35°	1756	1818	1879
40°	1725	1806	1897
45°	1686	1804	1926
50°	1631	1803	1978
55°	1574	1816	2049
60°	1484	1843	2140
65°	1371	1886	2260
70°	1197	1953	2408
75°	971	2053	2488
80°	717	2013	2013
85°	550	1484	1675



TEST NUMBER: P309659

CATALOG NUMBER: 24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.6	3.1
10°-20°	375.1	8.8
20°-30°	571.1	13.4
30°-40°	693.4	16.3
40°-50°	732.6	17.2
50°-60°	691.3	16.3
60°-70°	574.8	13.5
70°-80°	378.1	8.9
80°-90°	103.1	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1076.8	25.3
0°-40°	1770.2	41.7
0°-60°	3194.1	75.2
0°-90°	4250.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4250.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1379	1379	1379	1379	1379	
5°	1375	1375	1370	1375	1375	131
15°	1322	1324	1326	1338	1338	373
25°	1217	1224	1235	1256	1260	561
35°	1069	1082	1107	1135	1144	669
45°	886	904	948	995	1012	682
55°	671	699	774	847	874	597
65°	431	480	592	680	710	426
75°	187	272	395	468	479	201
85°	36	78	96	107	108	44
90°	0	0	0	0	0	



TEST NUMBER: P309659

CATALOG NUMBER: 24FCZ2-60HE-UNV-L82765-HRP-CP125-W2A-U-5500K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1378.9	1378.9	1378.9	1378.9	1378.9
2.5°	1380.7	1378.9	1371.8	1378.9	1378.9
5°	1375.4	1375.4	1370.0	1375.4	1375.4
7.5°	1366.5	1366.5	1362.9	1370.0	1370.0
10°	1355.8	1355.8	1354.0	1362.9	1362.9
12.5°	1339.8	1341.6	1339.8	1350.4	1350.4
15°	1322.0	1323.8	1325.5	1338.0	1338.0
17.5°	1298.8	1302.4	1306.0	1320.2	1322.0
20°	1277.5	1279.3	1286.4	1302.4	1304.2
22.5°	1249.0	1254.4	1263.3	1279.3	1284.6
25°	1217.0	1224.1	1234.8	1256.1	1259.7
27.5°	1186.8	1192.1	1206.3	1229.5	1236.6
30°	1149.4	1158.3	1176.1	1199.2	1208.1
32.5°	1113.8	1122.7	1144.1	1169.0	1176.1
35°	1069.3	1081.8	1106.7	1135.2	1144.1
37.5°	1026.6	1039.1	1069.3	1101.4	1112.0
40°	982.1	996.4	1028.4	1065.8	1080.0
42.5°	934.1	953.7	989.3	1030.2	1046.2
45°	886.1	903.9	948.3	994.6	1012.4
47.5°	834.5	855.8	903.9	959.0	980.4
50°	779.3	806.0	861.2	921.6	944.8
52.5°	724.2	754.4	816.7	884.3	909.2
55°	670.8	699.2	774.0	846.9	873.6
57.5°	612.1	647.6	729.5	807.8	834.5
60°	551.6	590.7	685.0	766.9	795.3
62.5°	491.1	535.6	642.3	724.2	754.4
65°	430.6	480.4	592.5	679.7	709.9
67.5°	371.9	427.0	546.2	633.4	663.7
70°	304.3	373.6	496.4	581.8	612.1
72.5°	242.0	322.0	448.4	528.4	555.1
75°	186.8	272.2	395.0	467.9	478.6
77.5°	137.0	222.4	339.8	364.7	366.5
80°	92.5	177.9	259.8	256.2	259.8
82.5°	60.5	133.4	163.7	183.3	185.0
85°	35.6	78.3	96.1	106.8	108.5
87.5°	17.8	26.7	33.8	35.6	39.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)