

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309716

Luminaire Tested: **24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309716
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.250"
POLYCARB SHEET
Light Source: (336) 2700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3860.0 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 52.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309716

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K

Luminous Intensity Polar Plot

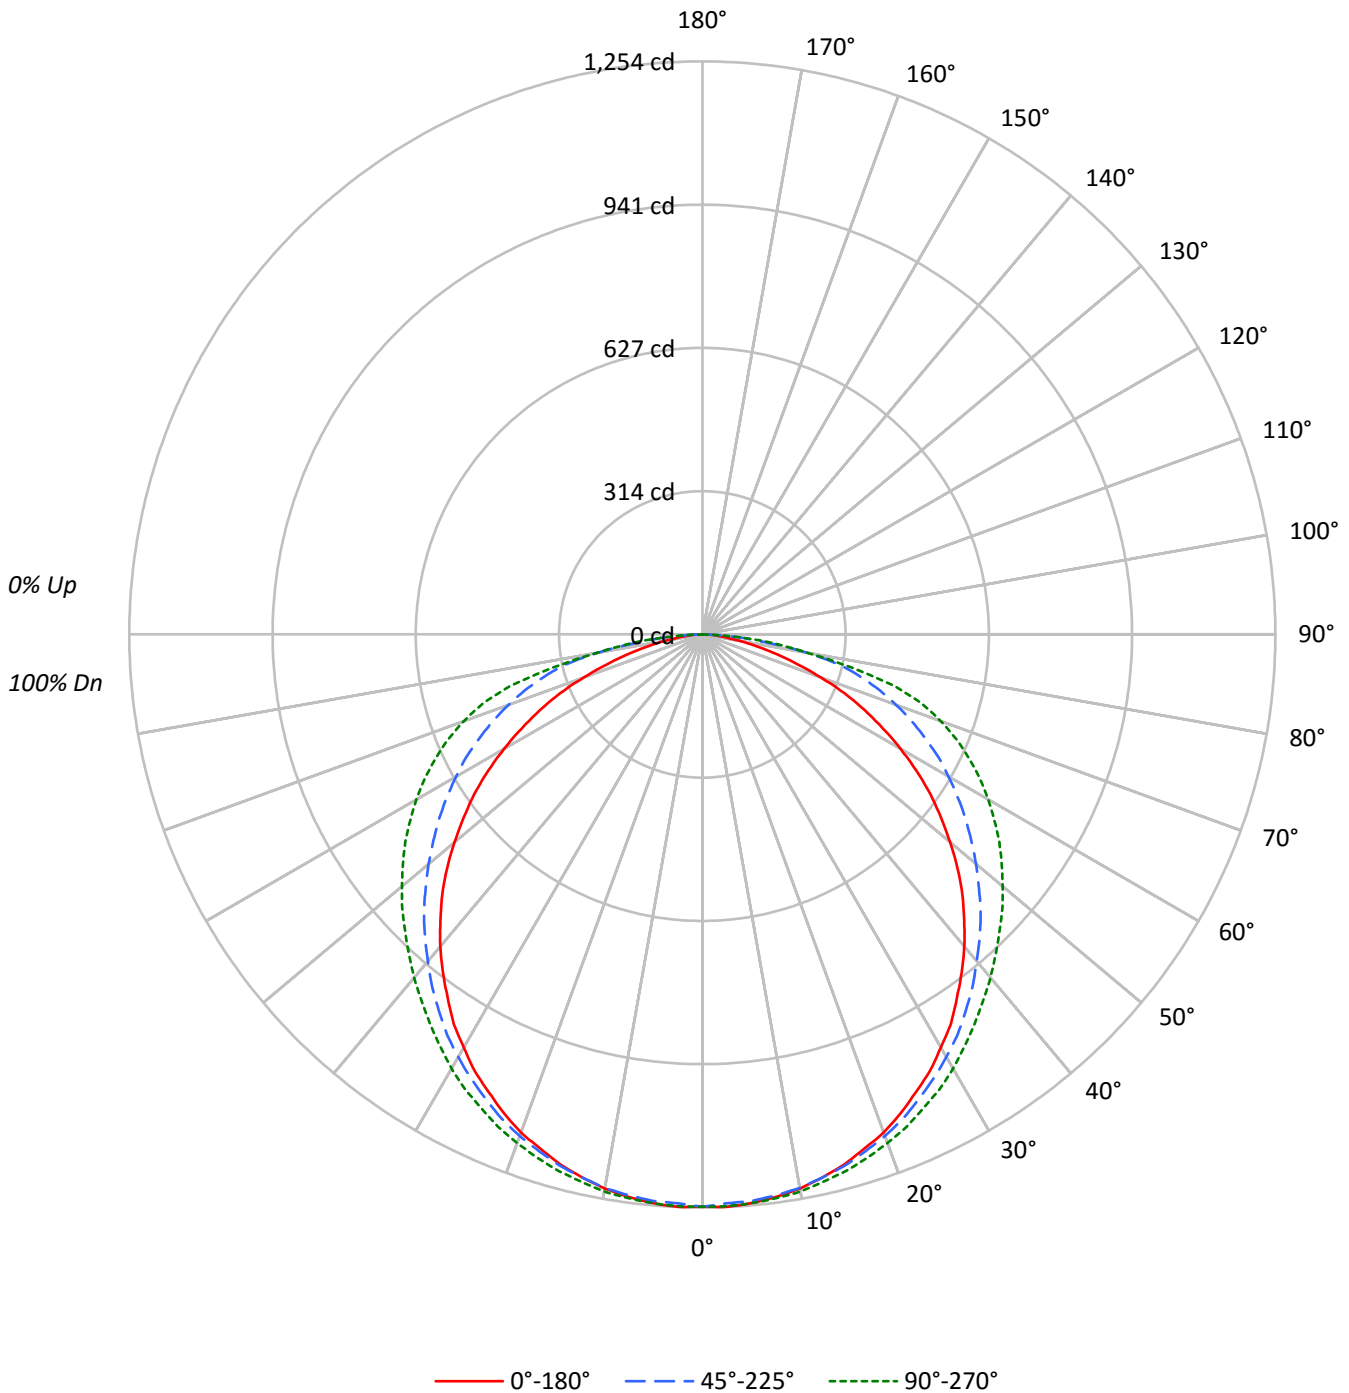



TEST NUMBER: P309716

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82				
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67				
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56				
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48				
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41				
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36				
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31				
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28				
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25				
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1685	1685	1685
5°	1687	1681	1687
10°	1682	1680	1691
15°	1673	1677	1693
20°	1661	1673	1696
25°	1641	1665	1699
30°	1622	1660	1705
35°	1595	1651	1707
40°	1567	1640	1723
45°	1531	1639	1750
50°	1482	1637	1796
55°	1429	1649	1861
60°	1348	1674	1944
65°	1245	1713	2053
70°	1087	1774	2187
75°	882	1865	2260
80°	651	1828	1828
85°	499	1348	1522



TEST NUMBER: P309716

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.6	3.1
10°-20°	340.7	8.8
20°-30°	518.7	13.4
30°-40°	629.8	16.3
40°-50°	665.3	17.2
50°-60°	627.8	16.3
60°-70°	522.0	13.5
70°-80°	343.4	8.9
80°-90°	93.6	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	978.0	25.3
0°-40°	1607.8	41.7
0°-60°	2900.9	75.2
0°-90°	3860.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3860.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1252	1252	1252	1252	1252	
5°	1249	1249	1244	1249	1249	119
15°	1201	1202	1204	1215	1215	339
25°	1105	1112	1122	1141	1144	510
35°	971	982	1005	1031	1039	608
45°	805	821	861	903	920	620
55°	609	635	703	769	793	543
65°	391	436	538	617	645	387
75°	170	247	359	425	435	183
85°	32	71	87	97	99	40
90°	0	0	0	0	0	



TEST NUMBER: P309716

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-HRP-CP250-W2A-U-2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1254.0	1252.4	1245.9	1252.4	1252.4
5°	1249.1	1249.1	1244.3	1249.1	1249.1
7.5°	1241.1	1241.1	1237.8	1244.3	1244.3
10°	1231.4	1231.4	1229.8	1237.8	1237.8
12.5°	1216.8	1218.4	1216.8	1226.5	1226.5
15°	1200.7	1202.3	1203.9	1215.2	1215.2
17.5°	1179.7	1182.9	1186.1	1199.1	1200.7
20°	1160.3	1161.9	1168.3	1182.9	1184.5
22.5°	1134.4	1139.3	1147.3	1161.9	1166.7
25°	1105.3	1111.8	1121.5	1140.9	1144.1
27.5°	1077.9	1082.7	1095.6	1116.6	1123.1
30°	1043.9	1052.0	1068.2	1089.2	1097.2
32.5°	1011.6	1019.7	1039.1	1061.7	1068.2
35°	971.2	982.5	1005.1	1031.0	1039.1
37.5°	932.4	943.7	971.2	1000.3	1010.0
40°	892.0	904.9	934.0	968.0	980.9
42.5°	848.4	866.2	898.5	935.6	950.2
45°	804.8	820.9	861.3	903.3	919.5
47.5°	757.9	777.3	820.9	871.0	890.4
50°	707.8	732.0	782.1	837.1	858.1
52.5°	657.7	685.2	741.7	803.1	825.8
55°	609.2	635.1	702.9	769.2	793.4
57.5°	555.9	588.2	662.5	733.7	757.9
60°	501.0	536.5	622.2	696.5	722.3
62.5°	446.0	486.4	583.4	657.7	685.2
65°	391.1	436.3	538.1	617.3	644.8
67.5°	337.7	387.8	496.1	575.3	602.8
70°	276.3	339.4	450.9	528.4	555.9
72.5°	219.8	292.5	407.2	479.9	504.2
75°	169.7	247.2	358.7	425.0	434.7
77.5°	124.4	202.0	308.7	331.3	332.9
80°	84.0	161.6	235.9	232.7	235.9
82.5°	54.9	121.2	148.7	166.4	168.1
85°	32.3	71.1	87.3	97.0	98.6
87.5°	16.2	24.2	30.7	32.3	35.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)