

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310306

Luminaire Tested: **24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310306
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.250" POLYCARB SHEET
Light Source: (336) 5000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3261.0 lumens
Efficiency: N/A
Efficacy: 73.9 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 44.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310306

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K

Luminous Intensity Polar Plot

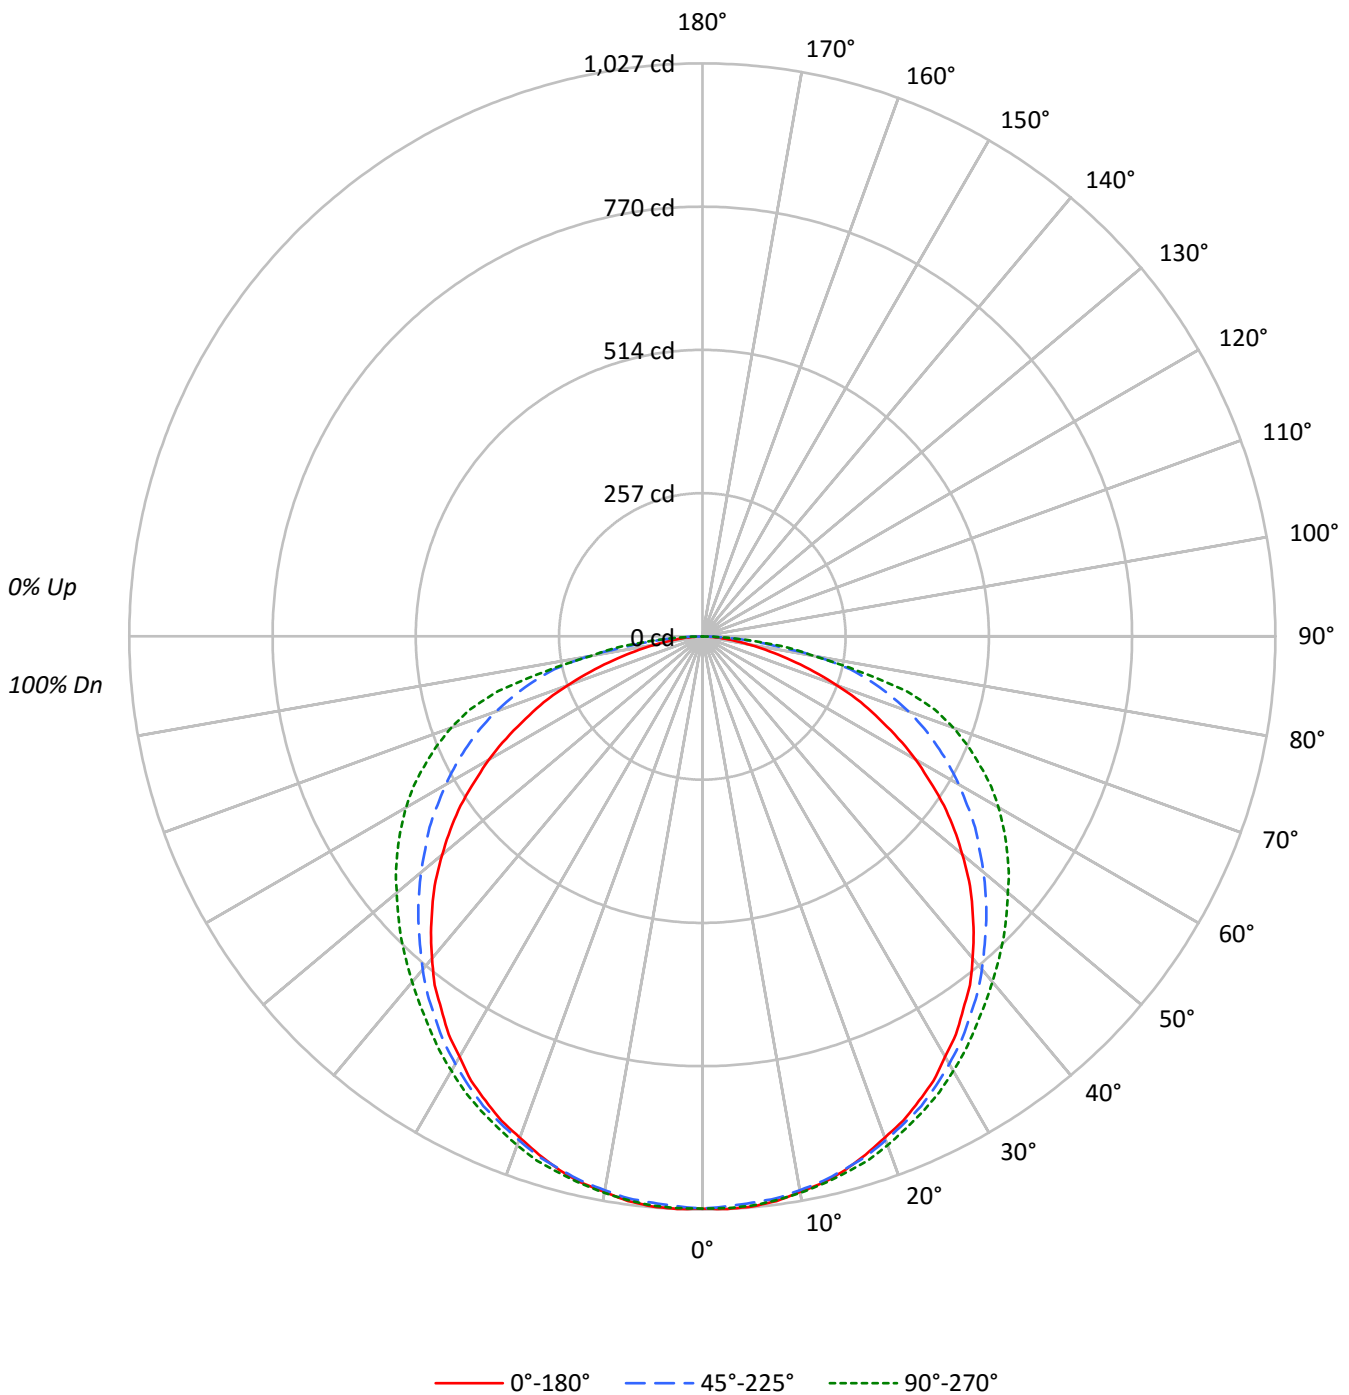



TEST NUMBER: P310306

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1380	1380	1380
5°	1385	1376	1383
10°	1381	1377	1383
15°	1379	1377	1386
20°	1369	1376	1390
25°	1364	1378	1393
30°	1352	1375	1397
35°	1339	1371	1403
40°	1324	1369	1420
45°	1302	1370	1453
50°	1273	1378	1496
55°	1241	1400	1563
60°	1188	1428	1650
65°	1112	1478	1751
70°	1012	1546	1884
75°	858	1631	1968
80°	676	1642	1592
85°	499	1249	1399



TEST NUMBER: P310306

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.3	3.0
10°-20°	280.0	8.6
20°-30°	428.1	13.1
30°-40°	523.4	16.0
40°-50°	557.8	17.1
50°-60°	533.3	16.4
60°-70°	451.8	13.9
70°-80°	303.7	9.3
80°-90°	85.6	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	805.4	24.7
0°-40°	1328.7	40.7
0°-60°	2419.9	74.2
0°-90°	3261.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3261.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1026	1026	1026	1026	1026	
5°	1026	1024	1019	1024	1024	97
15°	990	990	988	996	995	279
25°	919	922	928	936	938	423
35°	815	822	835	851	854	511
45°	684	696	720	750	764	528
55°	529	548	597	644	666	471
65°	349	385	464	526	550	347
75°	165	225	314	367	378	177
85°	32	66	81	87	91	40
90°	0	0	0	0	0	



TEST NUMBER: P310306

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-RDP-CP250-W2A-U-5000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1025.5	1025.5	1025.5	1025.5	1025.5
2.5°	1027.1	1027.1	1022.3	1025.5	1025.5
5°	1025.5	1023.9	1019.0	1023.9	1023.9
7.5°	1020.6	1019.0	1015.8	1020.6	1019.0
10°	1010.9	1010.9	1007.7	1012.6	1012.6
12.5°	1002.8	1001.2	999.6	1006.1	1004.5
15°	989.9	989.9	988.3	996.4	994.8
17.5°	973.7	975.3	977.0	983.4	985.1
20°	955.9	959.2	960.8	970.5	970.5
22.5°	939.8	941.4	944.6	954.3	954.3
25°	918.7	922.0	928.4	936.5	938.1
27.5°	897.7	899.3	907.4	918.7	920.4
30°	870.2	875.1	884.8	897.7	899.3
32.5°	845.9	850.8	862.1	875.1	878.3
35°	815.2	821.7	834.6	850.8	854.0
37.5°	787.7	792.6	808.7	826.5	831.4
40°	753.8	763.5	779.6	800.7	808.7
42.5°	719.8	729.5	748.9	776.4	786.1
45°	684.2	695.5	719.8	750.5	763.5
47.5°	648.6	661.6	689.1	724.6	739.2
50°	608.2	624.4	658.3	698.8	714.9
52.5°	569.4	588.8	626.0	671.3	692.3
55°	528.9	548.3	596.9	643.8	666.4
57.5°	483.6	509.5	562.9	616.3	640.5
60°	441.6	465.8	530.5	588.8	613.0
62.5°	396.3	428.6	498.2	559.7	583.9
65°	349.4	385.0	464.2	525.7	549.9
67.5°	307.3	346.1	430.3	491.7	516.0
70°	257.2	305.7	393.1	454.5	478.8
72.5°	210.3	263.7	354.2	414.1	436.7
75°	165.0	224.8	313.8	367.2	378.5
77.5°	122.9	186.0	271.7	294.4	286.3
80°	87.3	148.8	211.9	200.6	205.4
82.5°	56.6	113.2	131.0	148.8	153.7
85°	32.3	66.3	80.9	87.3	90.6
87.5°	14.6	24.3	32.3	32.3	30.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)