

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310480

Luminaire Tested: **24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P310480  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.187" POLYCARB SHEET  
Light Source: (336) 6500K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4533.0 lumens  
Efficiency: N/A  
Efficacy: 69.1 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 65.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P310480

CATALOG NUMBER: 24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K

### Luminous Intensity Polar Plot

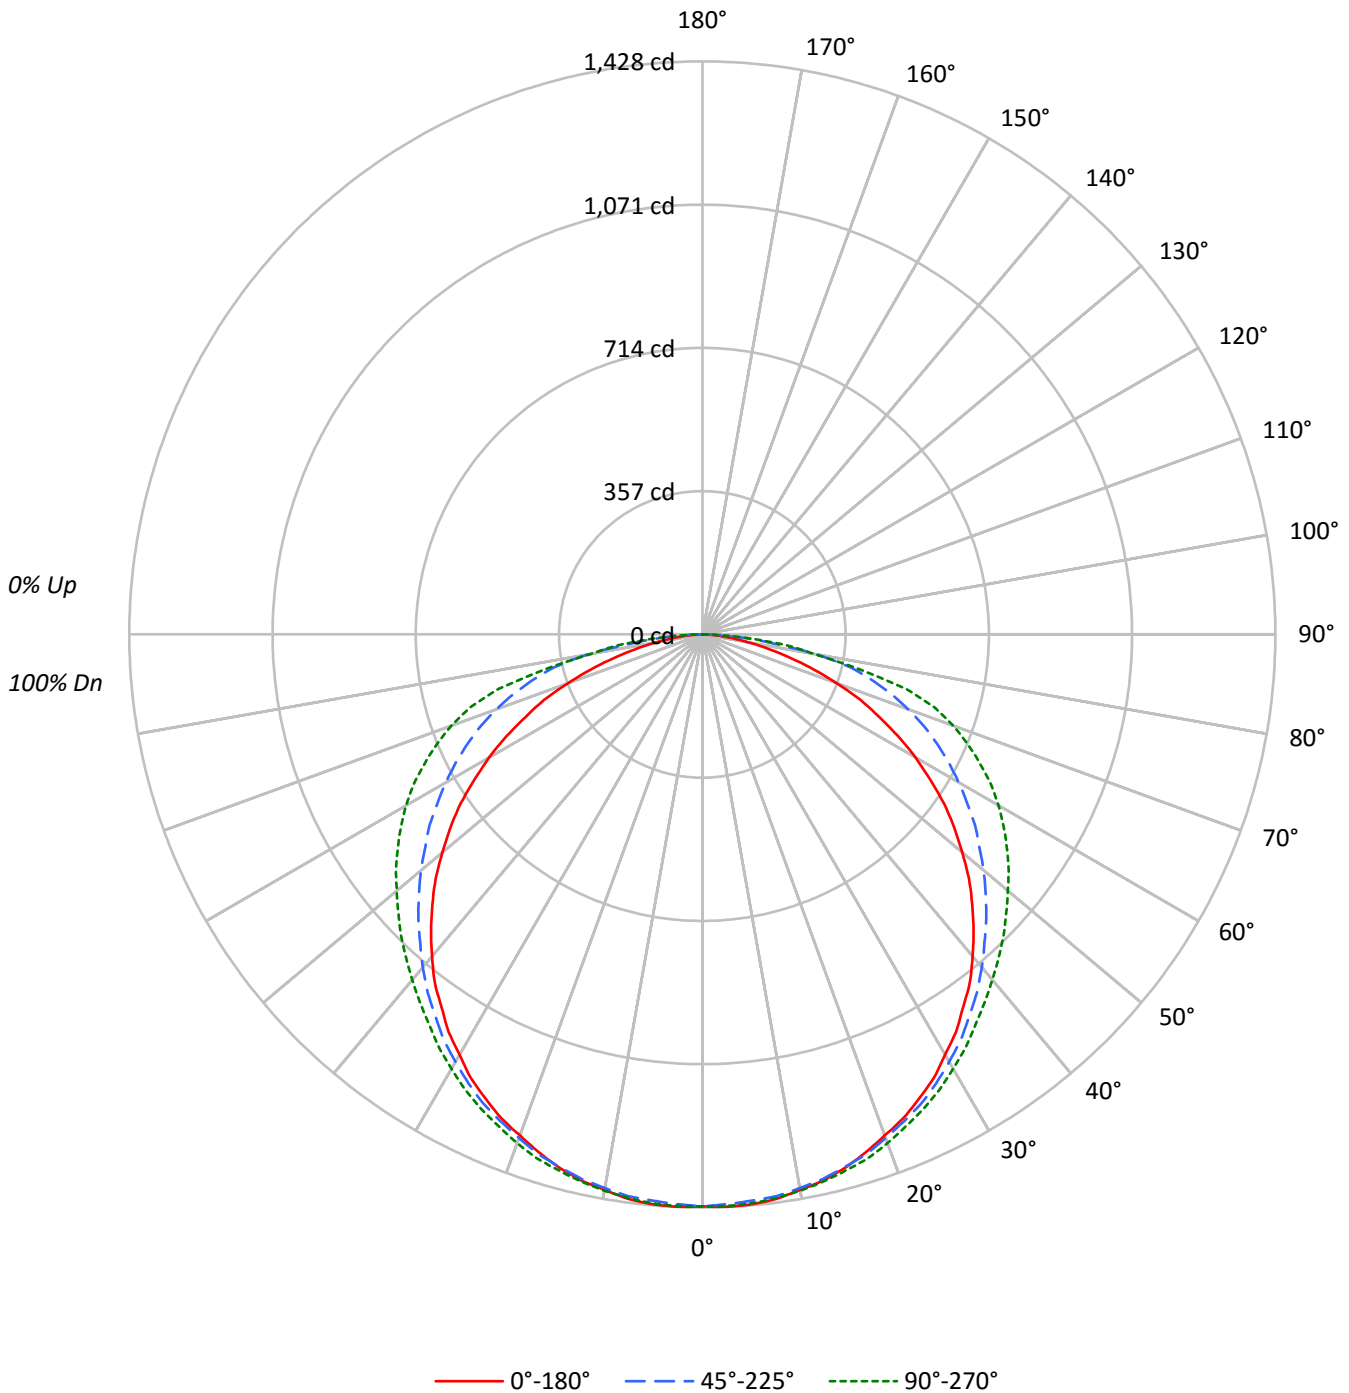



TEST NUMBER: P310480

CATALOG NUMBER: 24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1918	1918	1918
5°	1925	1913	1922
10°	1920	1914	1923
15°	1917	1914	1926
20°	1903	1912	1932
25°	1896	1916	1936
30°	1879	1911	1942
35°	1861	1906	1950
40°	1840	1903	1975
45°	1810	1904	2019
50°	1770	1915	2080
55°	1725	1946	2173
60°	1652	1985	2293
65°	1546	2054	2434
70°	1406	2150	2618
75°	1192	2268	2735
80°	941	2282	2212
85°	695	1735	1944



TEST NUMBER: P310480

CATALOG NUMBER: 24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.2	3.0
10°-20°	389.2	8.6
20°-30°	595.1	13.1
30°-40°	727.5	16.0
40°-50°	775.4	17.1
50°-60°	741.4	16.4
60°-70°	628.0	13.9
70°-80°	422.1	9.3
80°-90°	119.1	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1119.5	24.7
0°-40°	1847.0	40.7
0°-60°	3363.8	74.2
0°-90°	4533.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4533.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1426	1426	1426	1426	1426	
5°	1426	1423	1416	1423	1423	135
15°	1376	1376	1374	1385	1383	388
25°	1277	1282	1291	1302	1304	589
35°	1133	1142	1160	1183	1187	710
45°	951	967	1000	1043	1061	734
55°	735	762	830	895	926	655
65°	486	535	645	731	764	482
75°	229	312	436	510	526	246
85°	45	92	112	121	126	56
90°	0	0	0	0	0	



TEST NUMBER: P310480

CATALOG NUMBER: 24FCZ2-75HE-UNV-L82765-RDP-CP187-W2A-U-6500K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1425.5	1425.5	1425.5	1425.5	1425.5
2.5°	1427.7	1427.7	1421.0	1425.5	1425.5
5°	1425.5	1423.3	1416.5	1423.3	1423.3
7.5°	1418.8	1416.5	1412.0	1418.8	1416.5
10°	1405.3	1405.3	1400.8	1407.5	1407.5
12.5°	1394.0	1391.8	1389.5	1398.5	1396.3
15°	1376.0	1376.0	1373.8	1385.0	1382.8
17.5°	1353.5	1355.8	1358.0	1367.0	1369.3
20°	1328.8	1333.3	1335.6	1349.1	1349.1
22.5°	1306.3	1308.6	1313.1	1326.6	1326.6
25°	1277.1	1281.6	1290.6	1301.8	1304.1
27.5°	1247.9	1250.1	1261.4	1277.1	1279.4
30°	1209.7	1216.4	1229.9	1247.9	1250.1
32.5°	1175.9	1182.7	1198.4	1216.4	1220.9
35°	1133.2	1142.2	1160.2	1182.7	1187.2
37.5°	1095.0	1101.7	1124.2	1148.9	1155.7
40°	1047.8	1061.3	1083.7	1113.0	1124.2
42.5°	1000.5	1014.0	1041.0	1079.2	1092.7
45°	951.1	966.8	1000.5	1043.3	1061.3
47.5°	901.6	919.6	957.8	1007.3	1027.5
50°	845.4	867.9	915.1	971.3	993.8
52.5°	791.4	818.4	870.1	933.1	962.3
55°	735.2	762.2	829.7	894.9	926.3
57.5°	672.3	708.3	782.5	856.6	890.4
60°	613.8	647.5	737.5	818.4	852.2
62.5°	550.9	595.8	692.5	778.0	811.7
65°	485.7	535.1	645.3	730.7	764.5
67.5°	427.2	481.2	598.1	683.5	717.2
70°	357.5	425.0	546.4	631.8	665.5
72.5°	292.3	366.5	492.4	575.6	607.1
75°	229.3	312.5	436.2	510.4	526.1
77.5°	170.9	258.6	377.7	409.2	398.0
80°	121.4	206.9	294.5	278.8	285.5
82.5°	78.7	157.4	182.1	206.9	213.6
85°	45.0	92.2	112.4	121.4	125.9
87.5°	20.2	33.7	45.0	45.0	42.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)