

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310602

Luminaire Tested: **24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310602
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.125" POLYCARB SHEET
Light Source: (336) 4500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3194.0 lumens
Efficiency: N/A
Efficacy: 120.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 26.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310602

CATALOG NUMBER: 24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K

Luminous Intensity Polar Plot

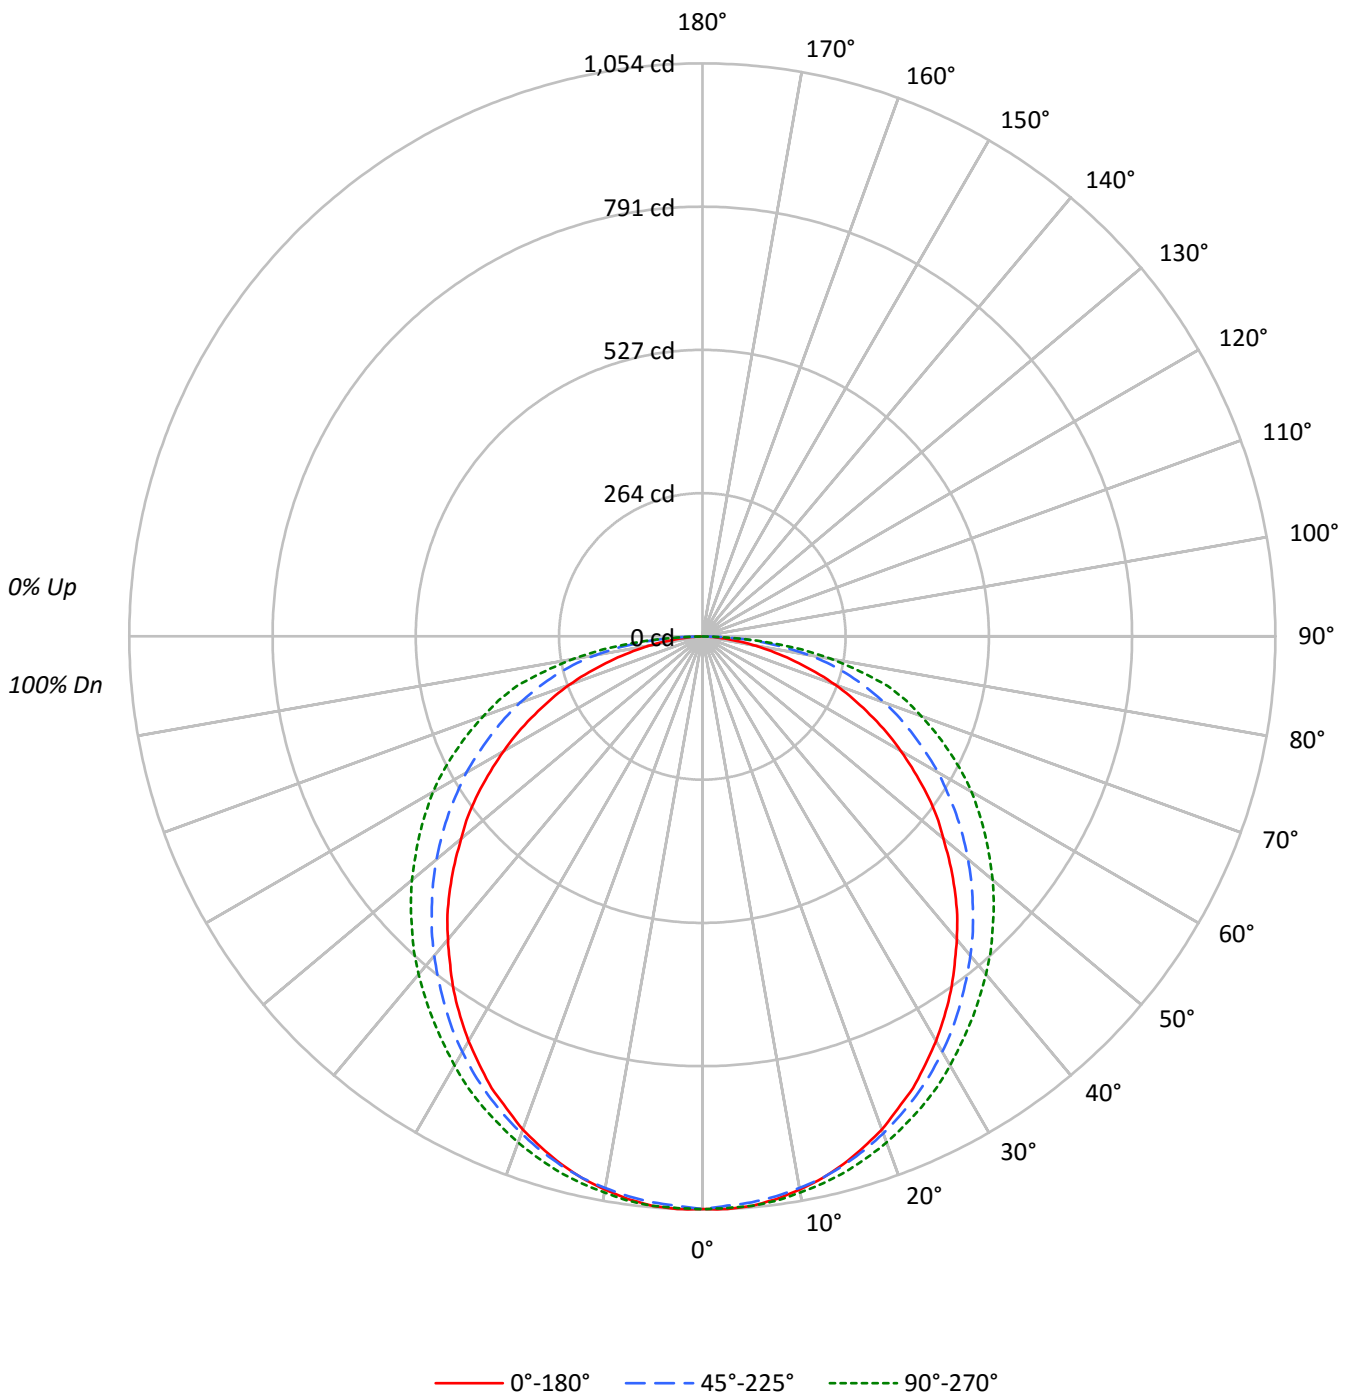



TEST NUMBER: P310602

CATALOG NUMBER: 24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	92	89	92	89	87	88	86	84	82
2	98	89	81	75	95	87	80	74	83	78	73	80	75	71	77	73	69	67
3	89	77	69	62	86	76	68	61	73	66	60	70	64	59	67	62	58	56
4	81	68	59	52	79	67	58	52	64	57	51	62	56	50	60	54	50	47
5	74	61	52	45	72	60	51	44	58	50	44	56	49	43	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	64	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	37	31	57	45	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1417	1417	1417
5°	1420	1411	1420
10°	1412	1407	1419
15°	1399	1402	1420
20°	1382	1393	1419
25°	1361	1383	1417
30°	1335	1371	1416
35°	1309	1358	1417
40°	1279	1348	1426
45°	1248	1339	1438
50°	1211	1335	1460
55°	1181	1337	1489
60°	1135	1349	1540
65°	1083	1363	1596
70°	1026	1405	1684
75°	914	1465	1840
80°	780	1552	1881
85°	556	1538	1800



TEST NUMBER: P310602

CATALOG NUMBER: 24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.7	3.1
10°-20°	285.0	8.9
20°-30°	430.5	13.5
30°-40°	518.9	16.2
40°-50°	544.7	17.1
50°-60°	509.6	16.0
60°-70°	420.9	13.2
70°-80°	286.8	9.0
80°-90°	97.8	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	815.3	25.5
0°-40°	1334.2	41.8
0°-60°	2388.5	74.8
0°-90°	3194.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3194.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1053	1053	1053	1053	1053	
5°	1051	1050	1045	1051	1051	100
15°	1005	1006	1007	1017	1019	283
25°	917	921	932	950	955	422
35°	797	805	827	854	863	498
45°	656	670	704	742	756	506
55°	503	524	570	617	635	449
65°	340	369	428	482	501	337
75°	176	216	282	335	354	188
85°	36	71	100	112	117	45
90°	0	0	0	0	0	



TEST NUMBER: P310602

CATALOG NUMBER: 24FCZ2-35HE-UNV-L82765-CP125-W2A-U-4500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1053.4	1053.4	1053.4	1053.4	1053.4
2.5°	1054.4	1053.4	1048.1	1053.4	1052.3
5°	1051.2	1050.2	1044.9	1051.2	1051.2
7.5°	1043.8	1043.8	1038.5	1045.9	1047.0
10°	1033.2	1033.2	1030.0	1038.5	1038.5
12.5°	1020.5	1020.5	1020.5	1029.0	1030.0
15°	1004.6	1005.7	1006.7	1017.3	1019.4
17.5°	985.5	987.7	990.8	1003.5	1005.7
20°	965.4	967.5	972.8	987.7	990.8
22.5°	940.0	945.3	952.7	969.6	972.8
25°	916.7	920.9	931.5	949.5	954.8
27.5°	888.0	894.4	908.2	927.2	934.7
30°	859.4	865.8	882.7	905.0	911.4
32.5°	828.7	838.2	856.2	879.6	887.0
35°	796.9	805.4	826.6	854.1	862.6
37.5°	761.9	773.6	796.9	826.6	837.2
40°	728.0	740.7	767.2	799.0	811.7
42.5°	694.1	706.8	736.5	772.5	785.2
45°	656.0	669.7	703.6	741.8	755.6
47.5°	617.8	634.8	671.9	712.1	727.0
50°	578.6	597.7	637.9	680.3	697.3
52.5°	543.6	561.6	604.0	649.6	665.5
55°	503.4	523.5	570.1	616.8	634.8
57.5°	462.0	484.3	534.1	585.0	603.0
60°	421.8	446.1	501.2	552.1	572.2
62.5°	382.6	406.9	464.2	517.1	537.3
65°	340.2	368.8	428.1	482.2	501.2
67.5°	299.9	330.6	393.2	446.1	465.2
70°	260.7	290.4	357.1	409.0	428.1
72.5°	218.3	252.2	319.0	373.0	393.2
75°	175.9	216.2	281.9	334.9	353.9
77.5°	136.7	178.0	243.7	287.2	296.7
80°	100.7	143.1	200.3	231.0	242.7
82.5°	64.6	107.0	152.6	174.9	184.4
85°	36.0	71.0	99.6	112.3	116.6
87.5°	14.8	30.7	40.3	45.6	45.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)