

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310724

Luminaire Tested: **24FCZ2-40-UNV-L82765-CA125-W2A-U-2700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310724
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-40-UNV-L82765-CA125-W2A-U-2700K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.125" ACRYLIC SHEET
Light Source: (168) 2700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3384.0 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 32.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310724

CATALOG NUMBER: 24FCZ2-40-UNV-L82765-CA125-W2A-U-2700K

Luminous Intensity Polar Plot

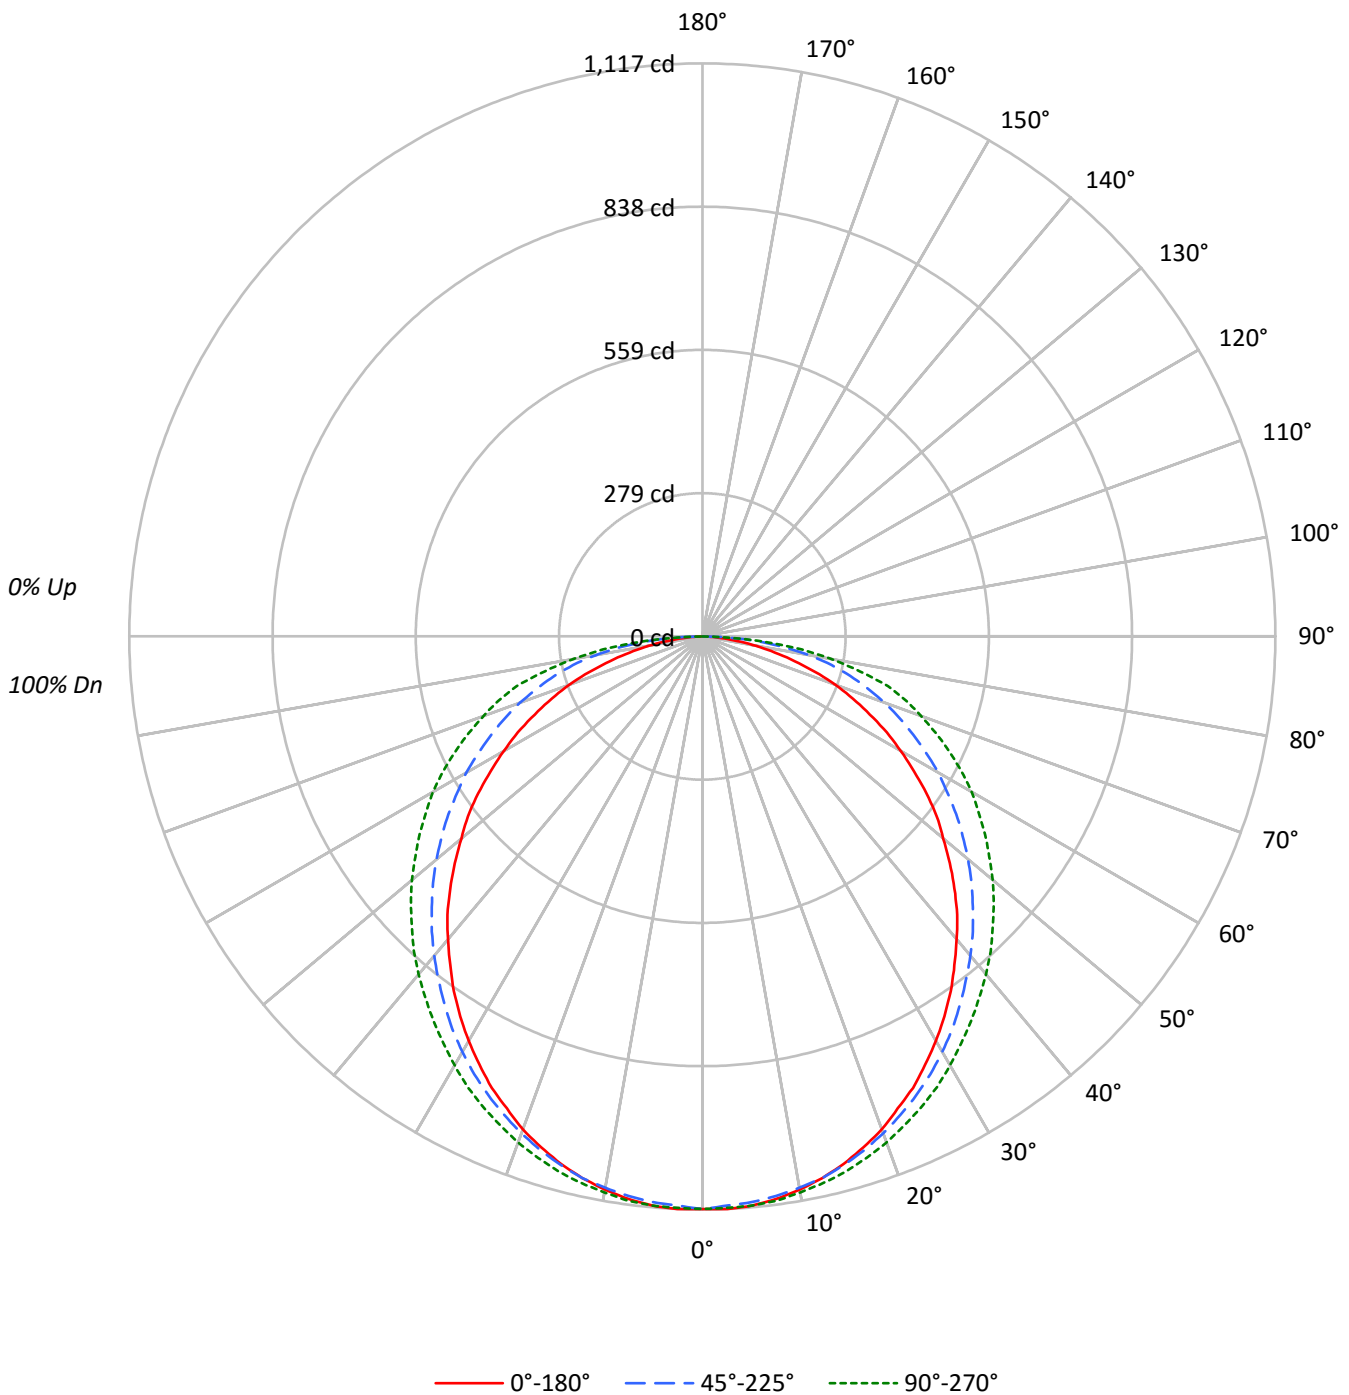



TEST NUMBER: P310724

CATALOG NUMBER: 24FC22-40-UNV-L82765-CA125-W2A-U-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	92	89	92	89	87	88	86	84	82
2	98	89	81	75	95	87	80	74	83	78	73	80	75	71	77	73	69	67
3	89	77	69	62	86	76	68	61	73	66	60	70	64	59	67	62	58	56
4	81	68	59	52	79	67	58	52	64	57	51	62	56	50	60	54	50	47
5	74	61	52	45	72	60	51	44	58	50	44	56	49	43	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	64	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	37	31	57	45	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1502	1502	1502
5°	1504	1495	1504
10°	1496	1491	1503
15°	1483	1486	1505
20°	1464	1476	1503
25°	1442	1465	1502
30°	1415	1453	1500
35°	1387	1438	1501
40°	1355	1428	1511
45°	1322	1419	1523
50°	1283	1415	1546
55°	1251	1417	1578
60°	1203	1429	1632
65°	1147	1444	1691
70°	1087	1489	1784
75°	969	1553	1949
80°	827	1644	1992
85°	590	1629	1907



TEST NUMBER: P310724

CATALOG NUMBER: 24FCZ2-40-UNV-L82765-CA125-W2A-U-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.6	3.1
10°-20°	302.0	8.9
20°-30°	456.1	13.5
30°-40°	549.8	16.2
40°-50°	577.1	17.1
50°-60°	540.0	16.0
60°-70°	445.9	13.2
70°-80°	303.8	9.0
80°-90°	103.6	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	863.8	25.5
0°-40°	1413.5	41.8
0°-60°	2530.6	74.8
0°-90°	3384.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3384.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1116	1116	1116	1116	1116	
5°	1114	1113	1107	1114	1114	106
15°	1064	1066	1067	1078	1080	300
25°	971	976	987	1006	1012	447
35°	844	853	876	905	914	528
45°	695	710	746	786	800	536
55°	533	555	604	653	672	476
65°	360	391	454	511	531	357
75°	186	229	299	355	375	199
85°	38	75	106	119	124	48
90°	0	0	0	0	0	



TEST NUMBER: P310724

CATALOG NUMBER: 24FCZ2-40-UNV-L82765-CA125-W2A-U-2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1116.0	1116.0	1116.0	1116.0	1116.0
2.5°	1117.1	1116.0	1110.4	1116.0	1114.9
5°	1113.8	1112.6	1107.0	1113.8	1113.8
7.5°	1105.9	1105.9	1100.3	1108.2	1109.3
10°	1094.7	1094.7	1091.3	1100.3	1100.3
12.5°	1081.2	1081.2	1081.2	1090.2	1091.3
15°	1064.4	1065.5	1066.6	1077.8	1080.1
17.5°	1044.2	1046.4	1049.8	1063.2	1065.5
20°	1022.8	1025.1	1030.7	1046.4	1049.8
22.5°	995.9	1001.5	1009.4	1027.3	1030.7
25°	971.2	975.7	986.9	1006.0	1011.6
27.5°	940.9	947.6	962.2	982.4	990.3
30°	910.6	917.3	935.3	958.8	965.6
32.5°	878.0	888.1	907.2	931.9	939.7
35°	844.3	853.3	875.7	904.9	913.9
37.5°	807.3	819.6	844.3	875.7	887.0
40°	771.3	784.8	812.9	846.6	860.0
42.5°	735.4	748.9	780.3	818.5	832.0
45°	695.0	709.6	745.5	785.9	800.5
47.5°	654.6	672.5	711.8	754.5	770.2
50°	613.0	633.2	675.9	720.8	738.8
52.5°	576.0	595.1	640.0	688.2	705.1
55°	533.3	554.6	604.0	653.4	672.5
57.5°	489.5	513.1	565.9	619.8	638.8
60°	446.9	472.7	531.1	585.0	606.3
62.5°	405.3	431.1	491.8	547.9	569.2
65°	360.4	390.7	453.6	510.9	531.1
67.5°	317.7	350.3	416.5	472.7	492.9
70°	276.2	307.6	378.4	433.4	453.6
72.5°	231.3	267.2	337.9	395.2	416.5
75°	186.4	229.0	298.7	354.8	375.0
77.5°	144.8	188.6	258.2	304.3	314.4
80°	106.7	151.6	212.2	244.8	257.1
82.5°	68.5	113.4	161.7	185.3	195.4
85°	38.2	75.2	105.5	119.0	123.5
87.5°	15.7	32.6	42.7	48.3	48.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)