

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P312695

Luminaire Tested: **22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P312695
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-24)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K
Description: 2'X2' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" ACRYLIC SHEET
Light Source: (168) 3000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2235.0 lumens
Efficiency: N/A
Efficacy: 69.2 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')
CIE Type: Direct


Input Watts (W): 32.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P312695

CATALOG NUMBER: 22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K

Luminous Intensity Polar Plot

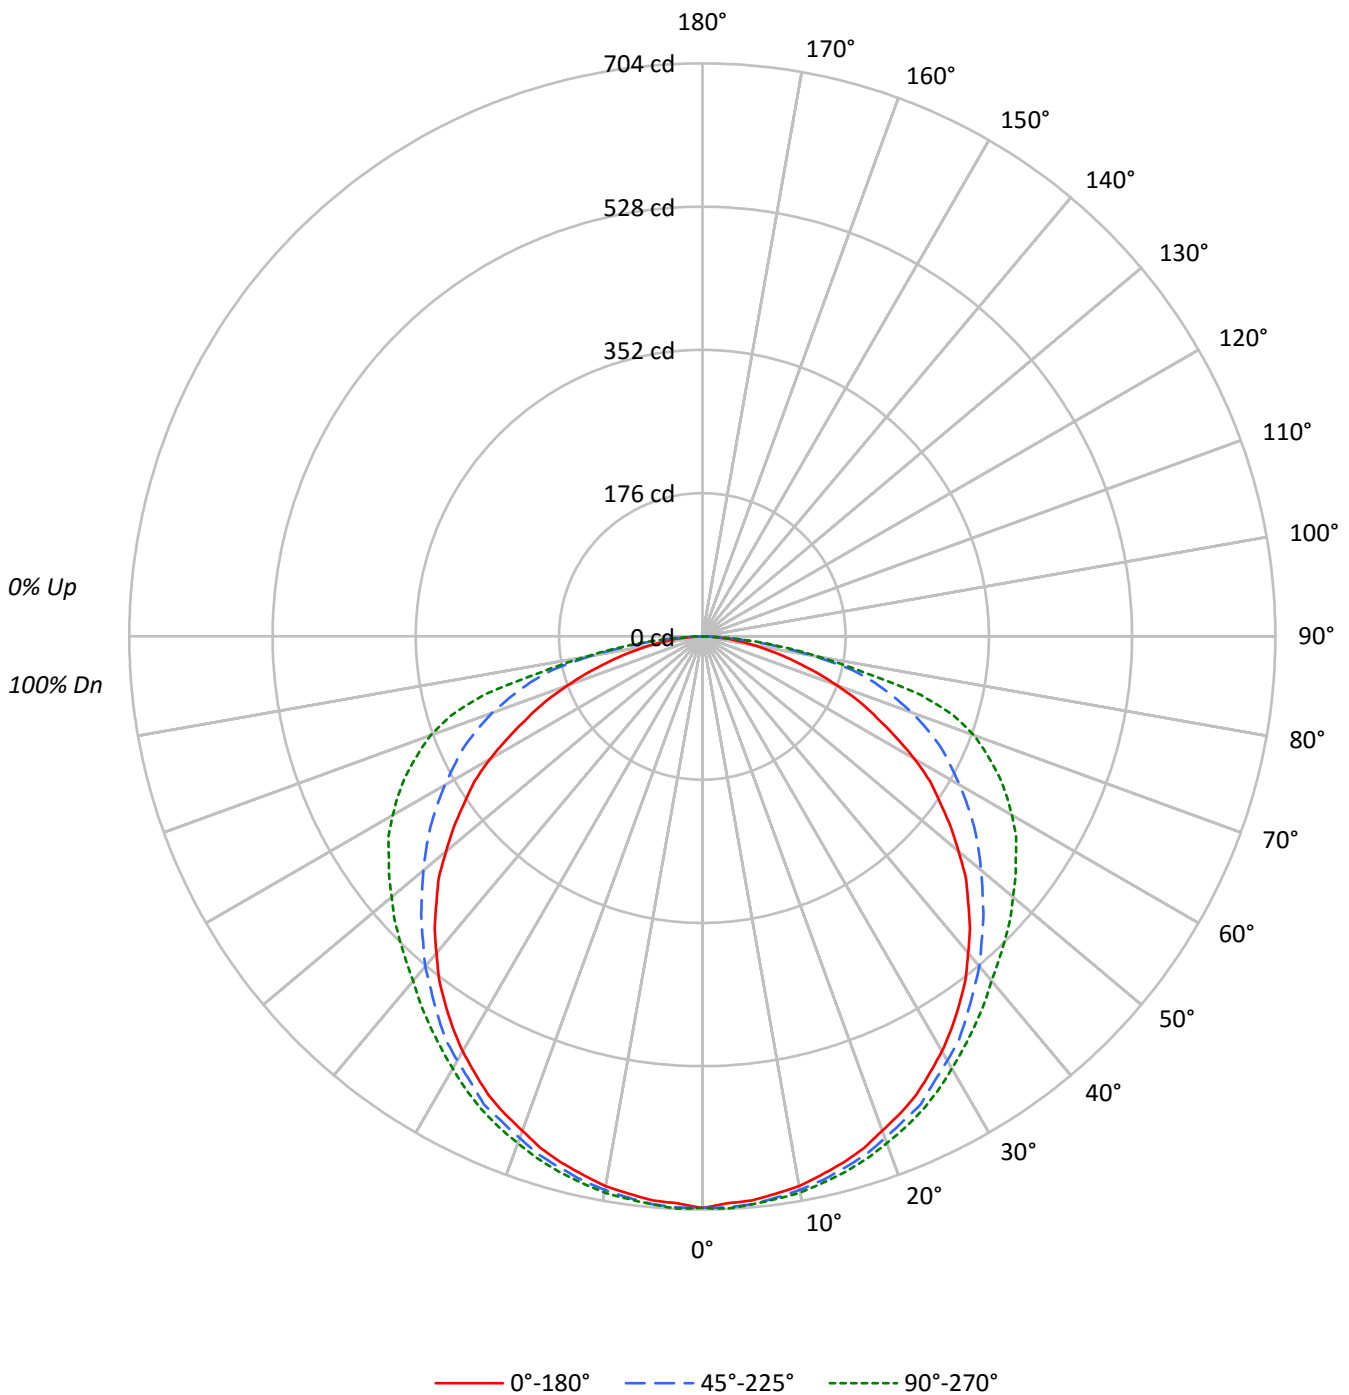



TEST NUMBER: P312695

CATALOG NUMBER: 22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	92	89	92	89	86	88	86	84	82
2	97	88	81	75	95	86	80	74	83	77	72	80	75	71	76	72	69	67
3	88	77	68	61	86	75	67	61	72	65	60	70	64	59	67	62	58	55
4	80	68	59	51	78	66	58	51	64	56	50	61	55	50	59	54	49	47
5	74	60	51	44	72	59	50	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	44	38	51	43	38	50	43	37	48	42	37	35
7	63	49	40	33	61	48	39	33	47	39	33	45	38	33	44	37	33	31
8	59	45	36	30	57	44	35	30	43	35	29	41	34	29	40	34	29	27
9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1889	1889	1889
5°	1879	1892	1892
10°	1873	1887	1896
15°	1864	1882	1896
20°	1851	1879	1897
25°	1845	1884	1904
30°	1829	1870	1906
35°	1809	1863	1918
40°	1785	1860	1940
45°	1758	1858	2002
50°	1721	1872	2086
55°	1674	1913	2206
60°	1619	1964	2363
65°	1508	2062	2555
70°	1384	2161	2794
75°	1213	2274	2889
80°	1044	2166	2267
85°	914	1575	1726



TEST NUMBER: P312695

CATALOG NUMBER: 22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.4	3.0
10°-20°	190.7	8.5
20°-30°	290.9	13.0
30°-40°	355.2	15.9
40°-50°	379.8	17.0
50°-60°	366.6	16.4
60°-70°	315.6	14.1
70°-80°	213.5	9.6
80°-90°	56.3	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	548.0	24.5
0°-40°	903.2	40.4
0°-60°	1649.6	73.8
0°-90°	2235.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2235.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	702	702	702	702	702	
5°	696	697	700	700	700	66
15°	669	671	676	679	681	189
25°	622	625	635	638	641	286
35°	551	556	567	579	584	345
45°	462	470	488	513	526	357
55°	357	368	408	449	470	320
65°	237	260	324	375	401	235
75°	117	155	219	263	278	125
85°	30	41	51	53	56	33
90°	0	0	0	0	0	



TEST NUMBER: P312695

CATALOG NUMBER: 22FCZ2-39HE-UNV-L83050-RDP-CA125-W2A-U-3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	702.1	702.1	702.1	702.1	702.1
2.5°	697.1	698.8	702.1	702.1	703.7
5°	695.5	697.1	700.4	700.4	700.4
7.5°	690.5	692.2	695.5	697.1	697.1
10°	685.6	687.3	690.5	692.2	693.8
12.5°	677.4	679.0	684.0	687.3	687.3
15°	669.2	670.8	675.7	679.0	680.7
17.5°	659.3	662.6	667.5	670.8	672.5
20°	646.2	649.4	656.0	660.9	662.6
22.5°	634.6	637.9	644.5	649.4	652.7
25°	621.5	624.8	634.6	637.9	641.2
27.5°	605.0	608.3	616.6	623.1	628.1
30°	588.6	591.9	601.8	610.0	613.3
32.5°	570.5	575.5	587.0	593.5	598.5
35°	550.8	555.7	567.2	578.7	583.7
37.5°	531.1	536.0	547.5	562.3	568.9
40°	508.0	514.6	529.4	549.1	552.4
42.5°	486.7	494.9	508.0	531.1	539.3
45°	462.0	470.2	488.3	513.0	526.1
47.5°	439.0	447.2	466.9	496.5	513.0
50°	411.0	422.5	447.2	481.7	498.2
52.5°	384.7	394.6	427.5	465.3	485.0
55°	356.8	368.3	407.7	448.9	470.2
57.5°	332.1	342.0	386.4	432.4	457.1
60°	300.9	314.0	365.0	414.3	439.0
62.5°	268.0	287.7	343.6	394.6	420.9
65°	236.8	259.8	323.9	374.9	401.2
67.5°	208.8	233.5	299.2	353.5	378.2
70°	175.9	207.2	274.6	327.2	355.1
72.5°	146.3	180.9	246.6	299.2	323.9
75°	116.7	154.6	218.7	263.1	277.9
77.5°	90.4	126.6	187.4	200.6	202.2
80°	67.4	100.3	139.8	141.4	146.3
82.5°	46.0	70.7	90.4	98.6	100.3
85°	29.6	41.1	51.0	52.6	55.9
87.5°	13.2	14.8	18.1	16.4	16.4
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)