

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P312958

Luminaire Tested: **22FCZ2-29HE-UNV-L83050-S-CP187-W2A-U-4500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P312958  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-23)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 22FCZ2-29HE-UNV-L83050-S-CP187-W2A-U-4500K  
Description: 2'X2' TROFFER LED MODULE, SMOOTH LENS, 0.187" POLYCARB SHEET  
Light Source: (168) 4500K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment: 

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2685.0 lumens  
Efficiency: N/A  
Efficacy: 114.3 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.26 / 1.34  
Luminous Opening: Rectangular (W 2' x L: 2' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P312958

CATALOG NUMBER: 22FCZ2-29HE-UNV-L83050-S-CP187-W2A-U-4500K

### Luminous Intensity Polar Plot

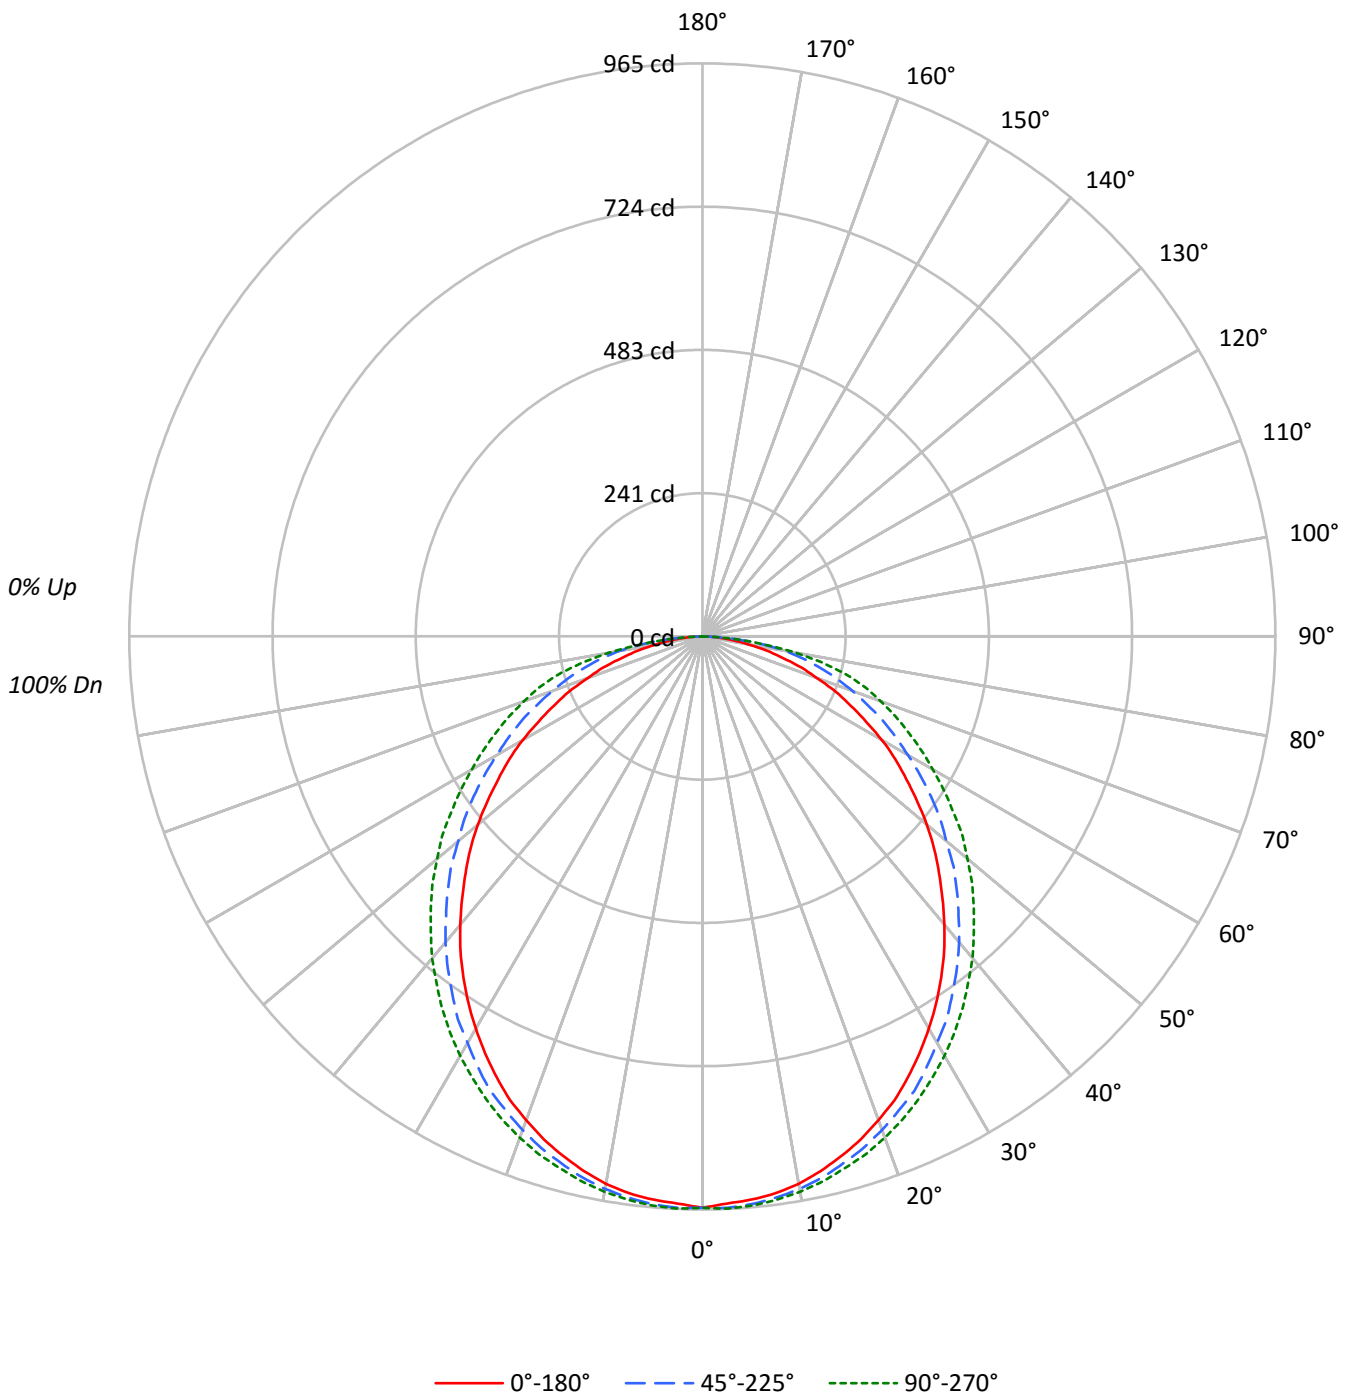



TEST NUMBER: P312958

CATALOG NUMBER: 22FCZ2-29HE-UNV-L83050-S-CP187-W2A-U-4500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83
2	98	90	83	77	96	88	82	76	84	79	74	81	77	73	78	74	71	69
3	90	79	71	64	87	77	70	63	74	68	62	72	66	61	69	64	60	58
4	82	70	61	54	80	69	60	54	66	59	53	64	57	52	61	56	52	49
5	75	62	53	47	73	61	53	46	59	52	46	57	51	45	55	50	45	43
6	70	56	47	41	68	55	47	41	53	46	40	52	45	40	50	44	39	37
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	31	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	28	27
10	53	40	32	26	51	39	31	26	38	31	26	37	31	26	36	30	26	24

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2589	2589	2589
5°	2572	2592	2599
10°	2557	2581	2595
15°	2523	2558	2583
20°	2483	2533	2572
25°	2433	2507	2555
30°	2371	2456	2534
35°	2304	2412	2510
40°	2227	2363	2486
45°	2145	2307	2460
50°	2066	2245	2439
55°	1969	2204	2421
60°	1881	2151	2414
65°	1755	2138	2441
70°	1617	2119	2514
75°	1459	2149	2644
80°	1261	2213	2486
85°	1044	1856	1856



TEST NUMBER: P312958

CATALOG NUMBER: 22FCZ2-29HE-UNV-L83050-S-CP187-W2A-U-4500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.0	3.4
10°-20°	258.9	9.6
20°-30°	387.4	14.4
30°-40°	458.8	17.1
40°-50°	467.6	17.4
50°-60°	419.1	15.6
60°-70°	328.1	12.2
70°-80°	211.6	7.9
80°-90°	62.5	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	737.3	27.5
0°-40°	1196.1	44.5
0°-60°	2082.8	77.6
0°-90°	2685.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2685.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	962	962	962	962	962	
5°	952	955	960	961	962	90
15°	906	911	918	926	927	255
25°	819	827	844	856	861	377
35°	702	710	734	757	764	438
45°	564	576	606	638	646	435
55°	420	434	470	502	516	376
65°	276	292	336	368	383	274
75°	140	162	207	242	254	150
85°	34	46	60	60	60	40
90°	0	0	0	0	0	



TEST NUMBER: P312958

CATALOG NUMBER: 22FC22-29HE-UNV-L83050-S-CP187-W2A-U-4500K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	962.1	962.1	962.1	962.1	962.1
2.5°	955.9	958.4	963.4	964.6	964.6
5°	952.1	954.6	959.6	960.9	962.1
7.5°	945.8	947.1	953.3	955.9	957.1
10°	935.8	938.3	944.6	948.3	949.6
12.5°	922.0	925.8	933.3	938.3	939.6
15°	905.7	910.8	918.3	925.8	927.0
17.5°	888.2	893.2	903.2	912.0	914.5
20°	866.9	873.2	884.4	894.5	898.2
22.5°	845.6	850.6	864.4	876.9	880.7
25°	819.3	826.8	844.4	855.6	860.6
27.5°	791.7	800.5	818.1	833.1	838.1
30°	762.9	771.7	790.5	809.3	815.5
32.5°	732.9	742.9	765.4	784.2	790.5
35°	701.5	710.3	734.1	756.7	764.2
37.5°	669.0	676.5	704.1	727.9	735.4
40°	633.9	643.9	672.7	700.3	707.8
42.5°	598.8	610.1	638.9	669.0	676.5
45°	563.7	576.3	606.3	637.7	646.4
47.5°	529.9	539.9	573.8	603.8	616.4
50°	493.6	503.6	536.2	570.0	582.5
52.5°	456.0	469.8	504.9	537.4	552.5
55°	419.7	433.5	469.8	502.4	516.1
57.5°	385.8	397.1	434.7	468.5	482.3
60°	349.5	359.5	399.6	436.0	448.5
62.5°	310.7	325.7	367.1	400.9	415.9
65°	275.6	291.9	335.7	368.3	383.3
67.5°	243.0	258.1	300.7	335.7	352.0
70°	205.5	225.5	269.3	304.4	319.5
72.5°	175.4	192.9	238.0	273.1	289.4
75°	140.3	161.6	206.7	241.8	254.3
77.5°	111.5	132.8	175.4	202.9	209.2
80°	81.4	102.7	142.8	156.6	160.4
82.5°	55.1	75.2	102.7	106.5	107.7
85°	33.8	46.4	60.1	60.1	60.1
87.5°	16.3	18.8	21.3	20.0	20.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)