

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313406

Luminaire Tested: **24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P313406
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.187" POLYCARB SHEET
Light Source: (336) 3500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5009.0 lumens
Efficiency: N/A
Efficacy: 79.8 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 62.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P313406

CATALOG NUMBER: 24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K

Luminous Intensity Polar Plot

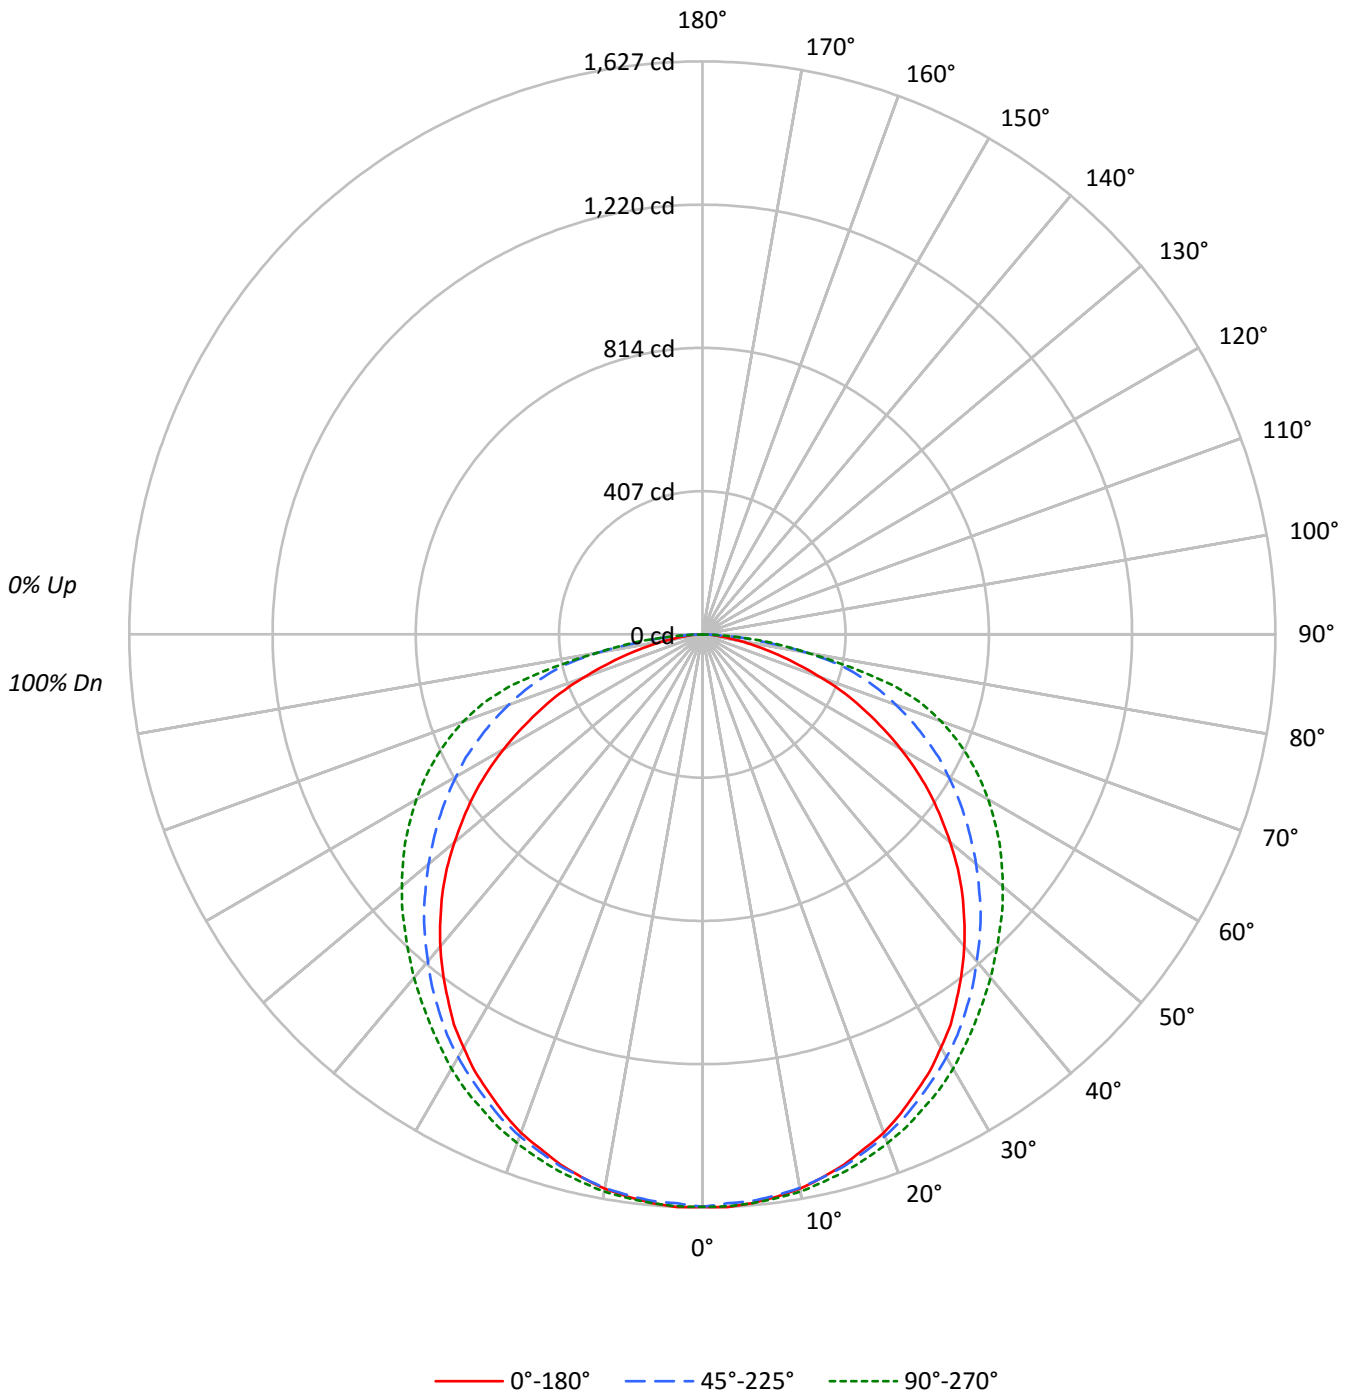



TEST NUMBER: P313406

CATALOG NUMBER: 24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	101	96	93	96	93	90	92	90	87	89	86	84	82
2	98	89	82	76	95	87	80	75	83	78	73	80	75	71	77	73	70	67
3	89	78	69	62	86	76	68	62	73	66	61	70	64	59	68	63	58	56
4	81	68	59	52	79	67	59	52	65	57	51	62	56	50	60	54	50	48
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	49	42	38	36
7	63	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	36	30	57	44	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2187	2187	2187
5°	2189	2181	2189
10°	2183	2180	2195
15°	2170	2176	2197
20°	2156	2171	2201
25°	2129	2161	2204
30°	2105	2153	2212
35°	2070	2142	2215
40°	2033	2129	2236
45°	1987	2127	2270
50°	1923	2124	2331
55°	1855	2140	2415
60°	1749	2172	2523
65°	1616	2223	2664
70°	1411	2302	2838
75°	1145	2420	2933
80°	845	2373	2373
85°	647	1748	1974



TEST NUMBER: P313406

CATALOG NUMBER: 24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.0	3.1
10°-20°	442.1	8.8
20°-30°	673.0	13.4
30°-40°	817.2	16.3
40°-50°	863.4	17.2
50°-60°	814.7	16.3
60°-70°	677.4	13.5
70°-80°	445.7	8.9
80°-90°	121.5	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1269.1	25.3
0°-40°	2086.3	41.7
0°-60°	3764.4	75.2
0°-90°	5009.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5009.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1625	1625	1625	1625	1625	
5°	1621	1621	1615	1621	1621	154
15°	1558	1560	1562	1577	1577	439
25°	1434	1443	1455	1480	1485	662
35°	1260	1275	1304	1338	1348	789
45°	1044	1065	1118	1172	1193	804
55°	791	824	912	998	1030	704
65°	508	566	698	801	837	502
75°	220	321	466	552	564	237
85°	42	92	113	126	128	51
90°	0	0	0	0	0	



TEST NUMBER: P313406

CATALOG NUMBER: 24FCZ2-75HE-UNV-L83050-HRP-CP187-W2A-U-3500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1625.2	1625.2	1625.2	1625.2	1625.2
2.5°	1627.3	1625.2	1616.8	1625.2	1625.2
5°	1621.0	1621.0	1614.7	1621.0	1621.0
7.5°	1610.5	1610.5	1606.3	1614.7	1614.7
10°	1597.9	1597.9	1595.8	1606.3	1606.3
12.5°	1579.0	1581.1	1579.0	1591.6	1591.6
15°	1558.1	1560.2	1562.3	1576.9	1576.9
17.5°	1530.8	1535.0	1539.2	1556.0	1558.1
20°	1505.6	1507.7	1516.1	1535.0	1537.1
22.5°	1472.1	1478.4	1488.9	1507.7	1514.0
25°	1434.3	1442.7	1455.3	1480.5	1484.7
27.5°	1398.7	1405.0	1421.8	1449.0	1457.4
30°	1354.7	1365.1	1386.1	1413.4	1423.9
32.5°	1312.7	1323.2	1348.4	1377.7	1386.1
35°	1260.3	1275.0	1304.3	1337.9	1348.4
37.5°	1210.0	1224.6	1260.3	1298.0	1310.6
40°	1157.5	1174.3	1212.1	1256.1	1272.9
42.5°	1100.9	1124.0	1165.9	1214.2	1233.0
45°	1044.3	1065.3	1117.7	1172.2	1193.2
47.5°	983.5	1008.7	1065.3	1130.3	1155.4
50°	918.5	949.9	1014.9	1086.2	1113.5
52.5°	853.5	889.1	962.5	1042.2	1071.6
55°	790.6	824.1	912.2	998.2	1029.6
57.5°	721.4	763.3	859.8	952.0	983.5
60°	650.1	696.2	807.3	903.8	937.4
62.5°	578.8	631.2	757.0	853.5	889.1
65°	507.5	566.2	698.3	801.1	836.7
67.5°	438.3	503.3	643.8	746.5	782.2
70°	358.6	440.4	585.1	685.7	721.4
72.5°	285.2	379.6	528.4	622.8	654.3
75°	220.2	320.8	465.5	551.5	564.1
77.5°	161.5	262.1	400.5	429.9	432.0
80°	109.0	209.7	306.2	302.0	306.2
82.5°	71.3	157.3	192.9	216.0	218.1
85°	41.9	92.3	113.2	125.8	127.9
87.5°	21.0	31.5	39.8	41.9	46.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)